



SUMMARY TEST DATA
ON
LM-10M2D5G-100CW-1KWP-SFF

Customer: ASTARIS
SO No: 2550
Model No: LM-10M2D5G-100CW-1KWP-SFF
Serial No: PL61250/2630

Tested By: K. Wagaman
Temperature: +25°C
Date: 7/21/2026
Drawing No: 27624585

REV: A5

TEST ITEM NO.	PARAMETERS	SPECIFIED VALUE	Test Results	QA QC
1	Frequency Range:	10 MHz to 2.5 GHz	10 MHz to 2.5 GHz	PMI QA6
2	Insertion Loss:	0.8 dB Max.	0.57 dB See Graph	
3	VSWR:	1.3:1 Max. @ -10 dBm Input (Notes 1,2)	1.18:1 In 1.12:1 Out See Graph	
4	Impedance:	50 Ω	Pass	
5	Input Power:	100W CW Maximum 1KW Peak (1% DUTY CYCLE, 1 μ S Maximum Pulse Width) (Notes 1,2,3,4)	Pass See Typical Characteristics	
6	Flat Leakage:	+14 dBm Max. @ 10W CW	Pass See Typical Characteristics	
7	P1dB:	0 dBm Min.	+ 6 dBm See Graph	
8	Recovery Time:	2 μ S Typ.	Pass See Typical Characteristics	PMI QA6

Notes:

1. POWER RATING AT 25°C: DERATED LINEARLY TO ZERO AT 150°C
2. HIGH POWER TEST DURATION: FULL RATED POWER FOR 10 SECONDS
3. HIGH POWER PEAK CONDITIONS: 1KW PEAK (1% DUTY CYCLE, 1USEC MAXIMUM PULSE WIDTH)
4. EXTERNAL DC BLOCKS ARE REQUIRED FOR PROPER FUNCTION.

QA/QC Approval:

Anthony Karoly

PMI
QA6


Date:

7/21/26


SUMMARY TEST DATA ON LM-10M2D5G-100CW-1KWP-SFF

PL61250/2630

Insertion Loss

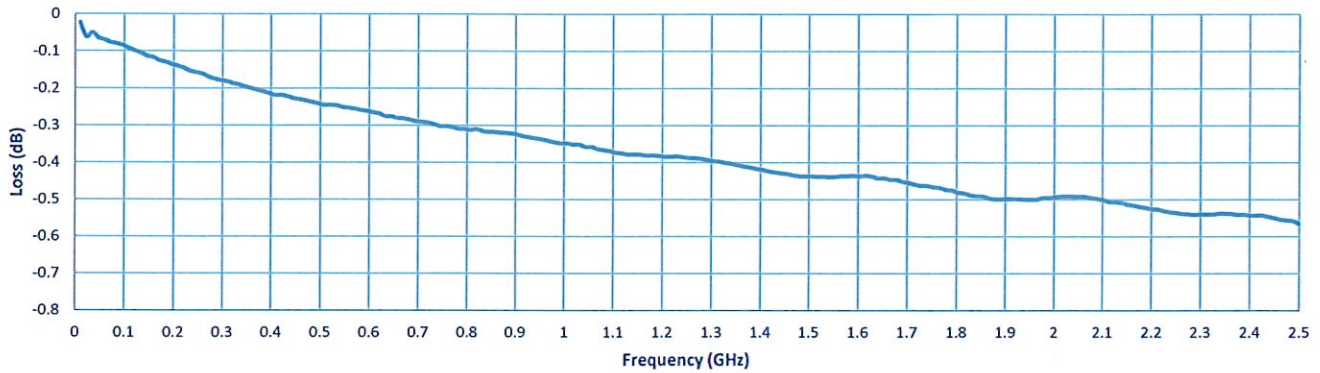

VSWR

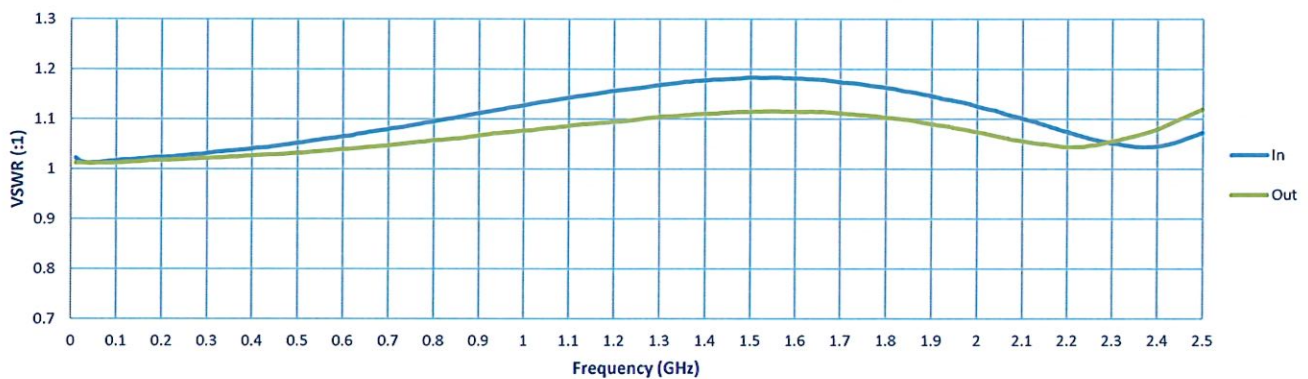

Limiter Response with Frequency

