

**SUMMARY TEST DATA  
ON  
P1T-500M40G-55-R-292FF**

61344

Customer: _____	Tested By: <u>Jerry N.</u>
SO No: _____	Temperature: <u>+25°C</u>
Model No: <u>P1T-500M40G-55-R-292FF</u>	Date: <u>06/09/2016</u>
Serial No: <u>61344</u>	Drawing No: <u>27627623</u> Rev: <u>A1</u>
Part No: _____	


TEST. ITEM NO	PARAMETERS	SPECIFIED VALUE	TEST RESULTS	QA QC
1	Frequency Range:	500 MHz to 40 GHz	<b>500 MHz to 40 GHz See Plot</b>	
2	Isolation:	55 dB Min.	<b>56.53 dB See Plot</b>	
3	Insertion Loss:	5.0 dB Typ.	<b>3.65 dB See Plot</b>	
4	VSWR: (In/Out)	2.5:1 Typ.	<b>2.13 :1 See Plot</b>	
5	Input Power:	+20 dBm CW Max.	<b>Pass</b>	
6	RF Switching Speed: (10% to 90% RF)	100 ns Max.	<b>22 ns See Plot</b>	
7	DC Voltage:	±5V	<b>±5V</b>	
8	Control Signal:	TTL Compatible 0 VDC On +5 VDC Off	<b>Pass</b>	

QA/QC Approval: \_\_\_\_\_ Date: \_\_\_\_\_

**SUMMARY TEST DATA  
ON  
P1T-500M40G-55-R-292FF**

61344

**(J1 – J2) Insertion Loss and Return Loss**

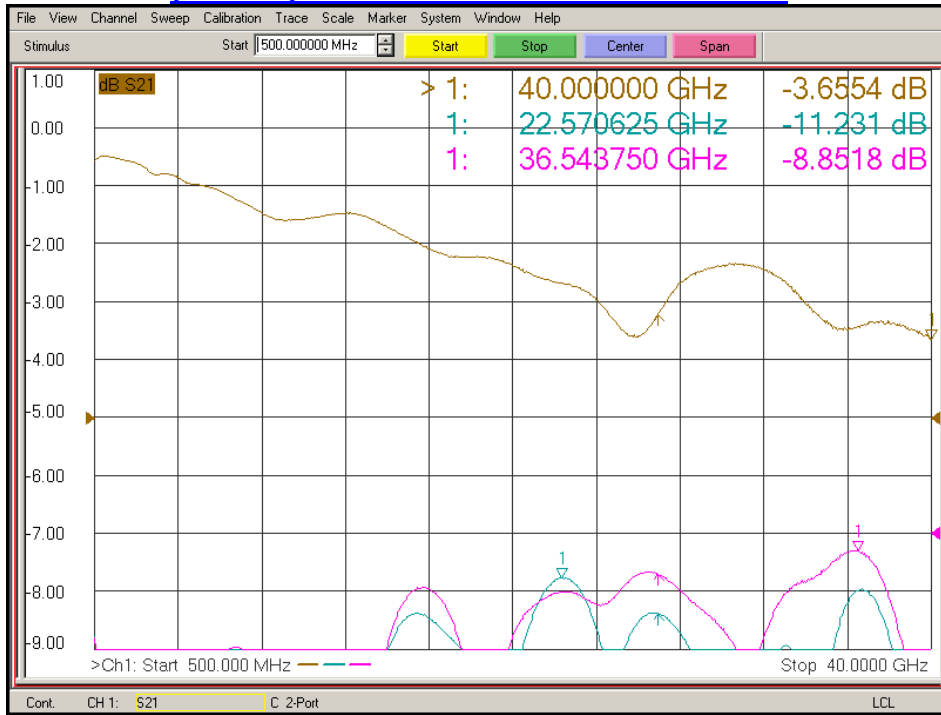

**(J1 – J2) Isolation and Termination Return Loss**

