



SUMMARY TEST DATA ON LM-1G18G-16-4W-SMF

Customer: _____
 SOno: _____
 Model No: LM-1G18G-16-4W-SMF
 Serial No: PL61918/2634
 Part No: _____

Tested By: John R. _____
 Temperature: +25°C _____
 Date: 8/24/2026 _____
 Drawing No: 27634041 _____ REV: A2 _____

TEST ITEM NO.	PARAMETERS	SPECIFIED VALUE	Test Results	QA QC
1	Frequency Range:	1.0 to 18.0 GHz	1.0 to 18.0 GHz	PMI QA6
2	Insertion Loss:	2.3 dB Max. @ -10 dBm Input Power	1.98 dB See Graph	
3	Leakage Power:	40 mW Max.	Pass See Typical Characteristics	
4	Spike Leakage:	0. 1erg. Max.	Pass See Typical Characteristics	
5	Recovery Time:	250 ns Max. @ 1000 W Peak Power	Pass See Typical Characteristics	
6	VSWR:	2.0: 1Max. @ -10 dBm Input Power	1.94:1 In 1.83:1 Out See Graph	
7	RF Power Handling:	4 W CW Max. @ 85°C	Pass See Typical Characteristics	
		1000 W Peak Max. (1 μs PW, 0.1% DC @ 85°C)	Pass See Typical Characteristics	
8	Limiting Threshold:	+5 dBm Min. (1 dB Compression)	+8 dBm See Graph	PMI QA6

QA/QC Approval:

Anthony Kacoly PMI QA6


Date: 8/25/26

7309-A Grove Road Frederick, MD 21704 USA Phone: (301) 662-5019 Fax: (301) 662-1731
 Email: sales@pmi-rf.com


SUMMARY TEST DATA ON LM-1G18G-16-4W-SMF

PL61918/2634

Insertion Loss

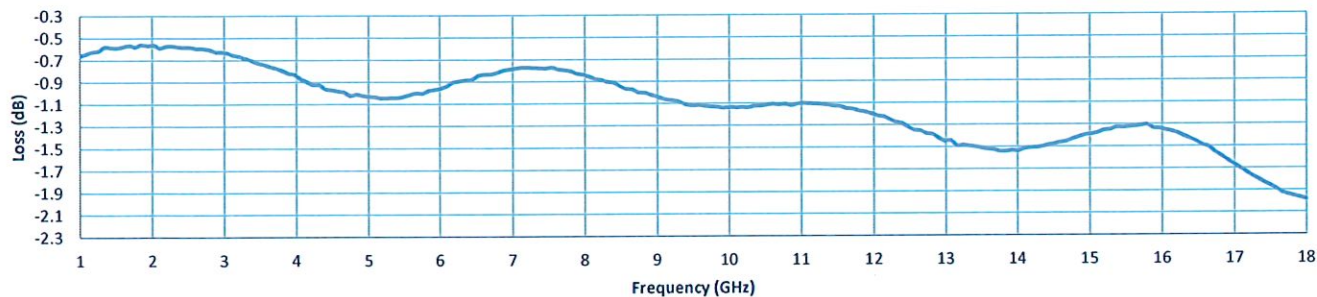

VSWR

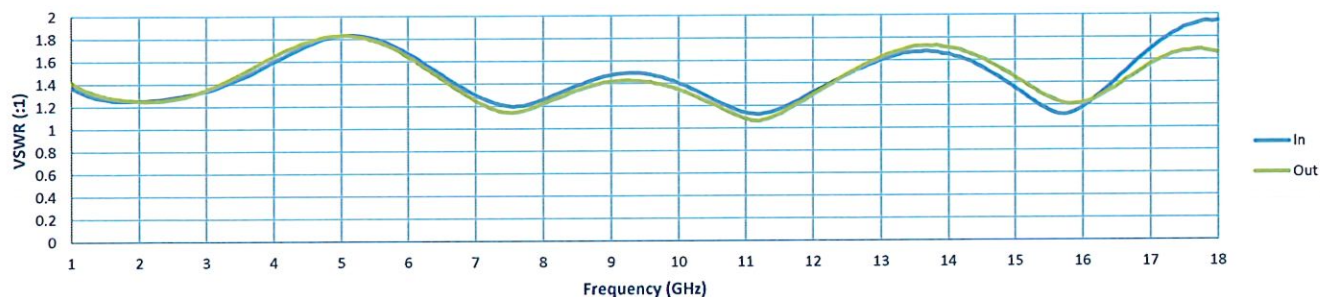

Limiter Response with Frequency

