

SUMMARY TEST DATA ON BPF-2697D5M2902D5M-SFF-2

Customer: _____
 SO: _____
 Model No: BPF-2697D5M2902D5M-SFF-2
 Serial No: PL62108/2635

Tested By: OLIVER K
 Temperature: 25°C
 Date: 8/27/2026
 Drawing No: 27655060 Rev: A1

TEST ITEM	PARAMETERS	SPECIFIED VALUE	TEST RESULTS	QA/QC
1	Passband Frequency	2697.5 to 2902.5 MHz	2697.5 to 2902.5 MHz	
2	Insertion Loss	2 dB Max.	0.51 dB	
3	Passband Ripple	0.5 dB Max.	0.12 dB	
4	VSWR	1.6:1 Max.	1.3:1	
5	Rejection @ DC to 1348 MHz	60 dB Min.	65.3 dB	
6	Rejection @ 5395 to 8090 MHz	60 dB Min.	81.6 dB	
7	Rejection @ 8090 to 18000 MHz	80 dB Min.	81.7 dB	
8	Rejection @ 18000 to 20000 MHz	60 dB Min.	71.8 dB	




***FOR ALL OTHER SPECIFICATIONS SEE TYPICAL CHARACTERISTICS ON THE PMI WEBSITE**

QA/AC Approval: _____

Date: _____




SUMMARY TEST DATA ON BPF-2697D5M2902D5M-SFF-2

PL62108/2635

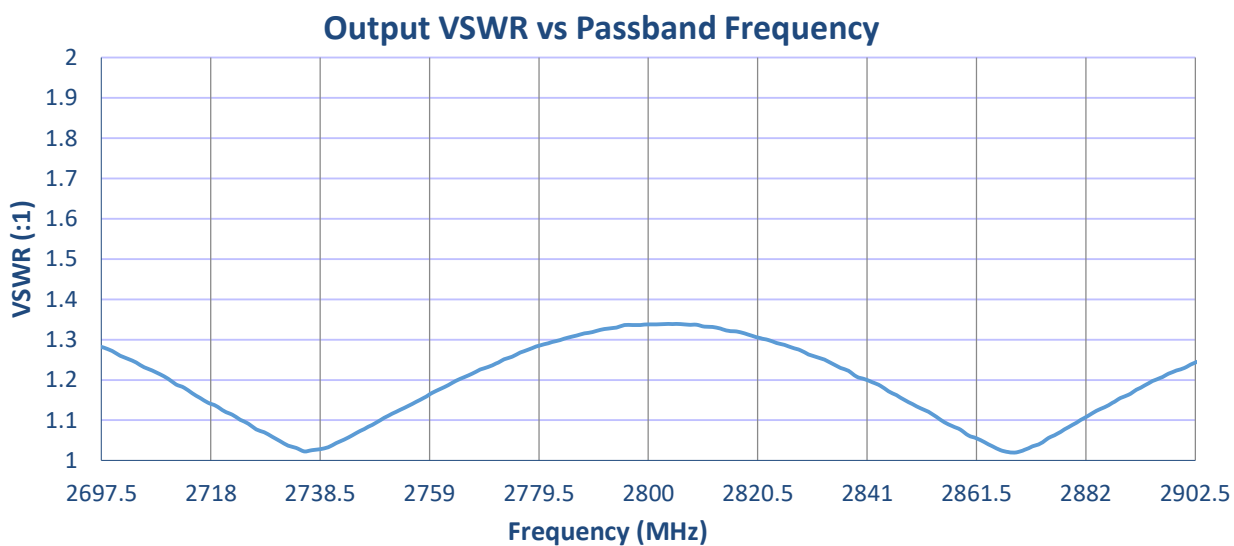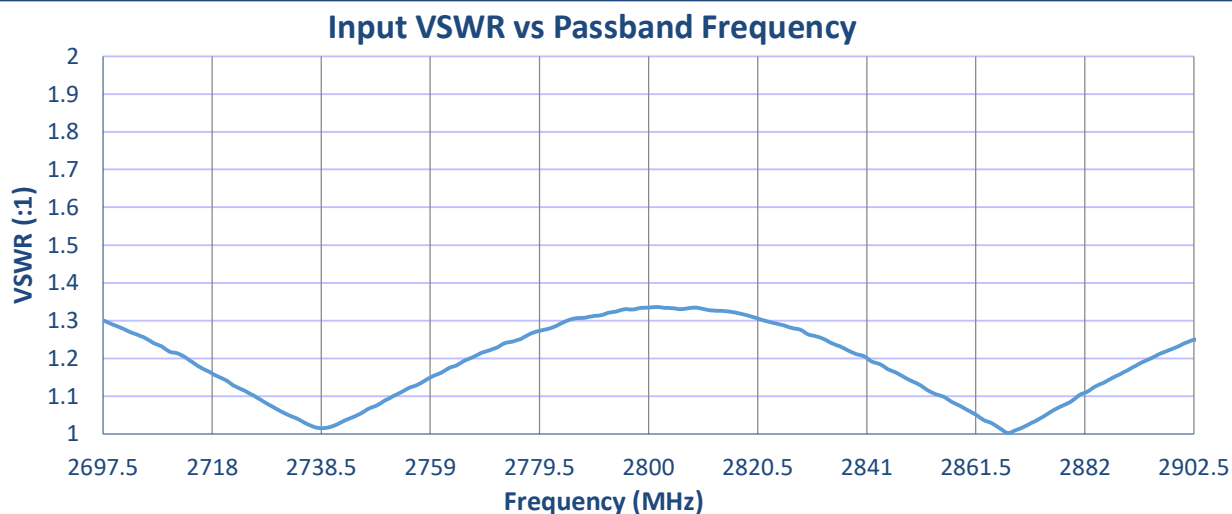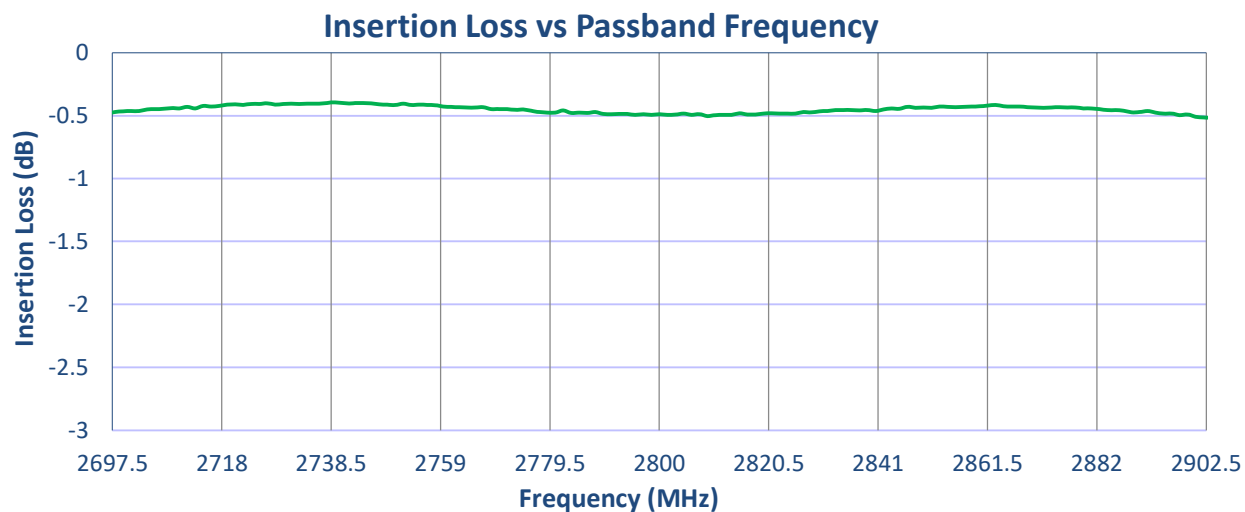

SUMMARY TEST DATA ON BPF-2697D5M2902D5M-SFF-2

PL62108/2635

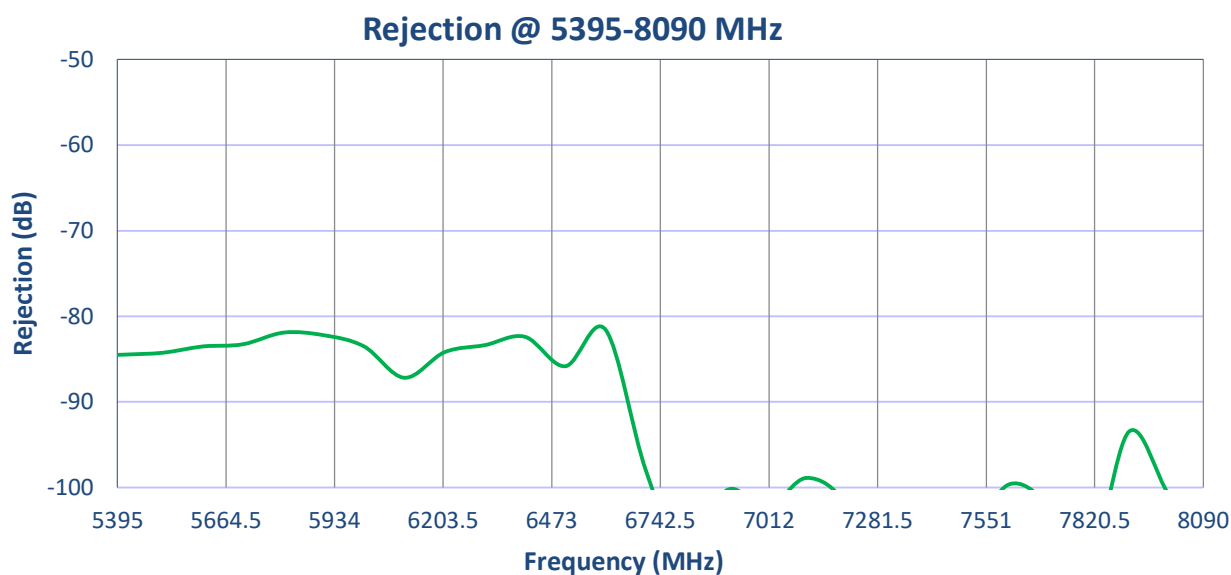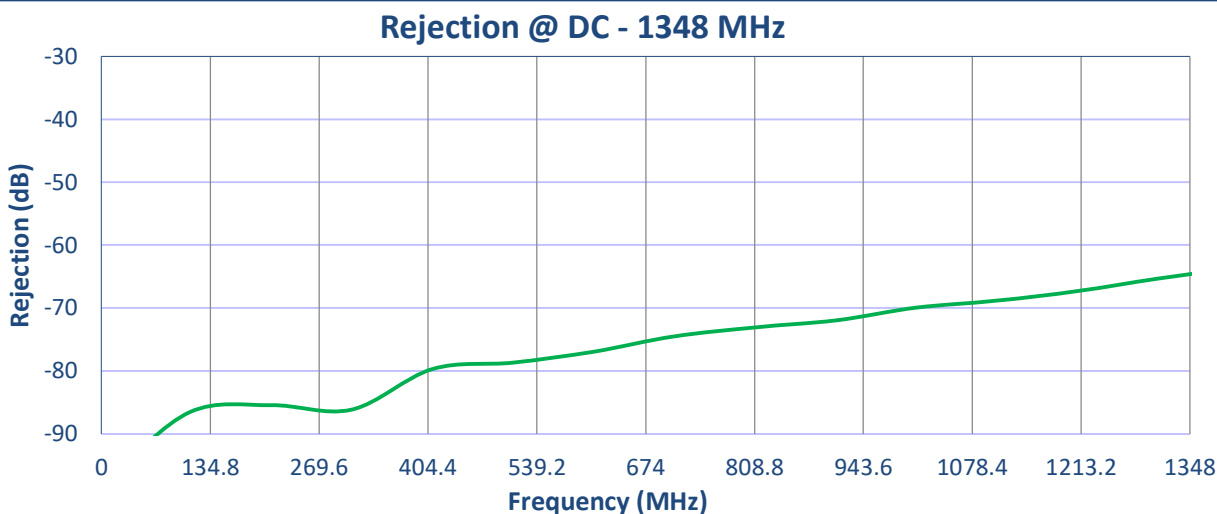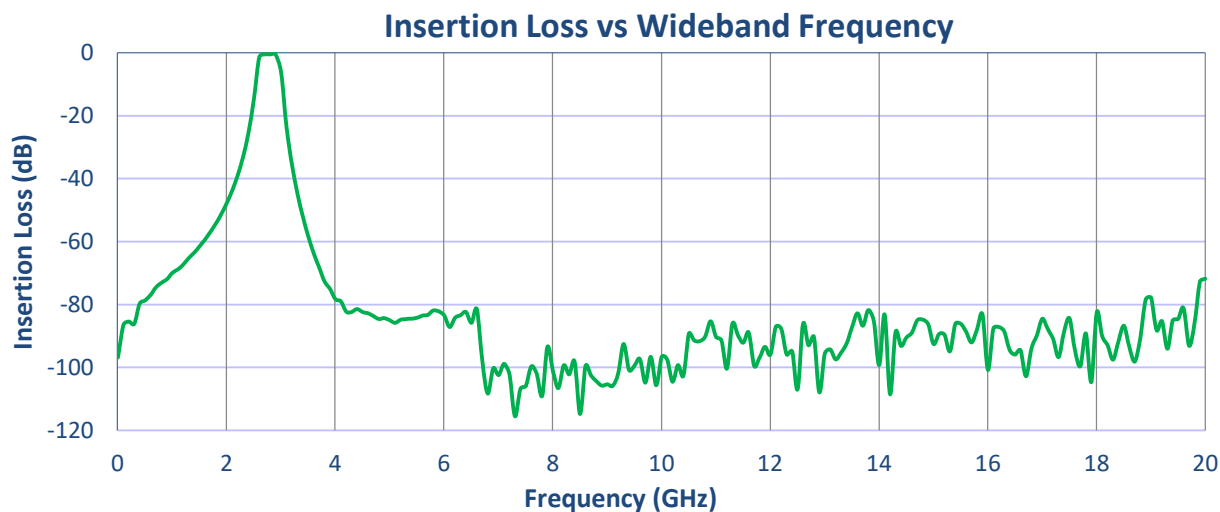

**SUMMARY TEST DATA
ON
BPF-2697D5M2902D5M-SFF-2**

PL62108/2635

