Quantic PMI
PLANAR MONOLITHICS

SUMMARY TEST DATA
ON
LM-2G18G-RAD-3W-19DBM-SMF

Customer: [redacted]
SO No: [redacted]
Model No: LM-2G18G-RAD-3W-19DBM-SMF
Serial No: PL62228/2637

Tested By: OLIVER K
Temperature: +25°C
Date: 9/8/2026
Drawing No: 27646460
REV: A2


TEST ITEM NO.	PARAMETERS	SPECIFIED VALUE	Test Results	QA QC
1	Frequency Range:	2 GHz to 18 GHz	2 GHz to 18 GHz	PMI QA6
2	Insertion Loss:	2.5 dB Max.	1.94 dB See Graph	
3	VSWR:	2.0:1 Max.	1.71:1 In 1.8:1 Out See Graph	
4	Leakage Power:	80 mW (+19 dBm) Typ.	+ 14.91 dBm See Graph	
5	Power Handling:	3W CW Max. 1 kW Max. 0.1% DC 1 us PW	Pass See Typical Characteristics	
6	Recovery Time:	200 ns Max.	Pass See Typical Characteristics	PMI QA6


QA/QC Approval: Anthony Karoly PMI QA6 Date: 9/15/26


7309-A Grove Road Frederick, MD 21704 USA Phone: (301) 662-5019 Fax: (301) 662-1731
Email: sales@pmi-rf.com

SUMMARY TEST DATA
ON
LM-2G18G-RAD-3W-19DBM-SMF

PL62228/2637

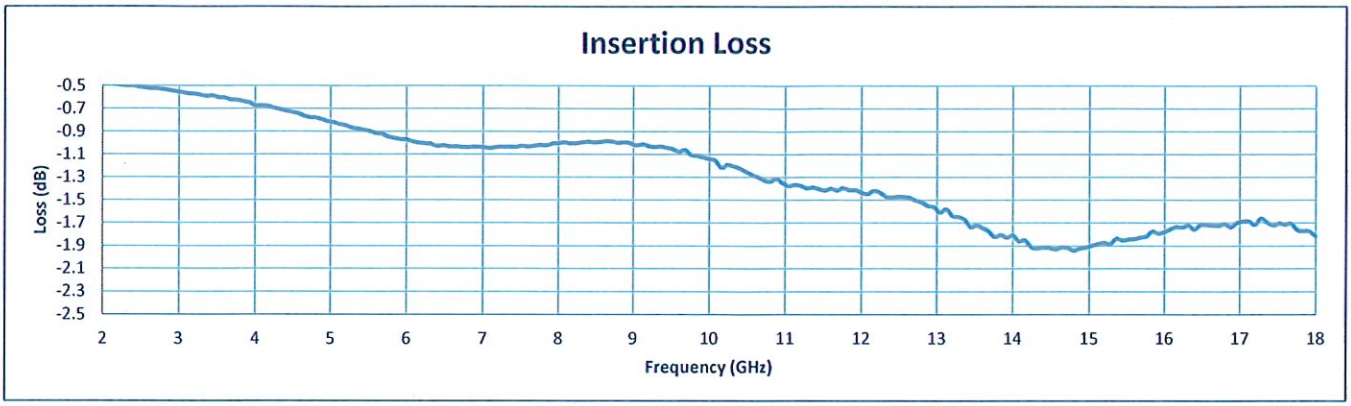

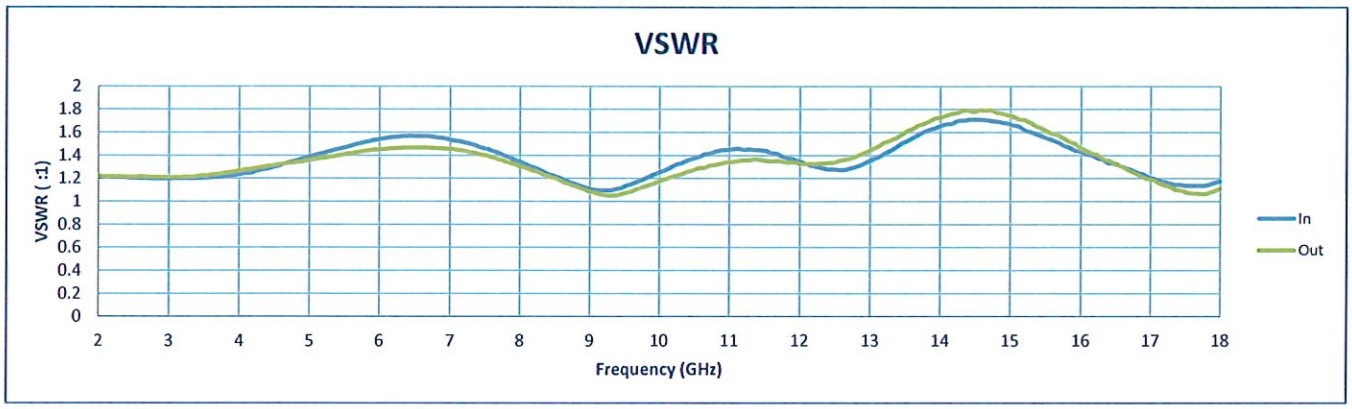

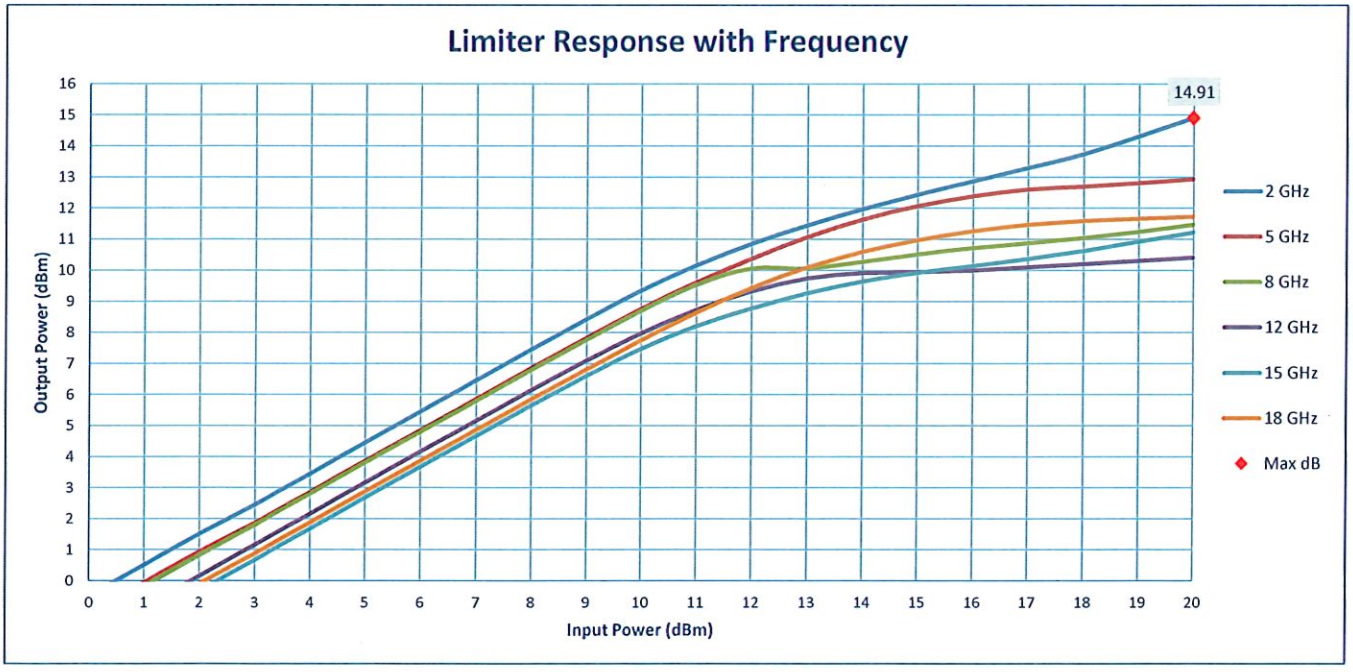

7309-A Grove Road Frederick, MD 21704 USA Phone: (301) 662-5019 Fax: (301) 662-1731
Email: sales@pmi-rf.com