Quantic PMI
PLANAR MONOLITHICS

# SUMMARY TEST DATA
# ON
# LM-1G18G-16-4W-SMF

Customer:
SO No:
Model No: LM-1G18G-16-4W-SMF
Serial No: PL62459/2638
Part No:

Tested By: John R.
Temperature: +25°C
Date: 9/17/2026
Drawing No: 27634041 REV: A2

| TEST ITEM NO. | PARAMETERS | SPECIFIED VALUE | Test Results | QA QC |
|---|---|---|---|---|
| 1 | Frequency Range: | 1.0 to 18.0 GHz | 1.0 to 18.0 GHz | PMI QA6 |
| 2 | Insertion Loss: | 2.3 dB Max. @ -10 dBm Input Power | 1.63 dB See Graph | |
| 3 | Leakage Power: | 40 mW Max. | Pass See Typical Characteristics | |
| 4 | Spike Leakage: | 0.1 erg. Max. | Pass See Typical Characteristics | |
| 5 | Recovery Time: | 250 ns Max. @ 1000 W Peak Power | Pass See Typical Characteristics | |
| 6 | VSWR: | 2.0:1 Max. @ -10 dBm Input Power | 1.71:1 In 1.7:1 Out See Graph | |
| 7 | RF Power Handling: | 4 W CW Max. @ 85°C | Pass See Typical Characteristics | |
| | | 1000 W Peak Max. (1 µs PW, 0.1% DC @ 85°C) | Pass See Typical Characteristics | |
| 8 | Limiting Threshold: | +5 dBm Min. (1 dB Compression) | +7 dBm See Graph | PMI QA6 |

QA/QC Approval: Anthony Kacoly PMI QA6 Date: 9/21/26


7309-A Grove Road Frederick, MD 21704 USA Phone: (301) 662-5019 Fax: (301) 662-1731
Email: sales@pmi-rf.com

Quantic PMI
PLANAR MONOLITHICS


# SUMMARY TEST DATA
# ON
# LM-1G18G-16-4W-SMF

PL62459/2638


## Insertion Loss

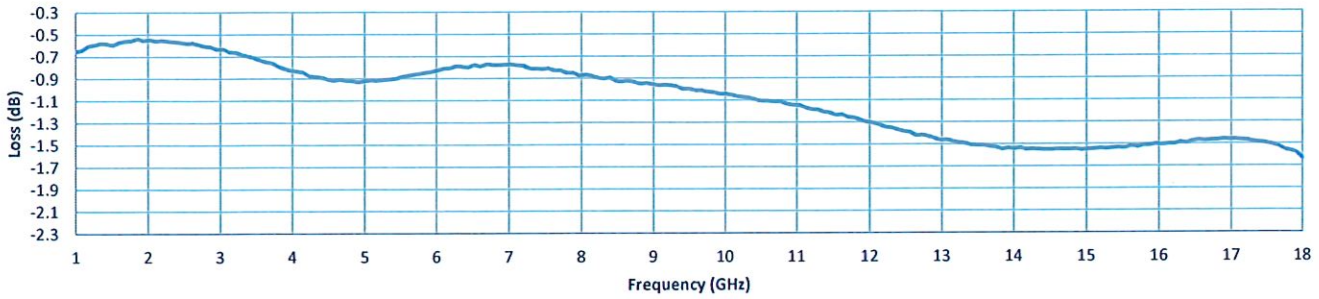


## VSWR

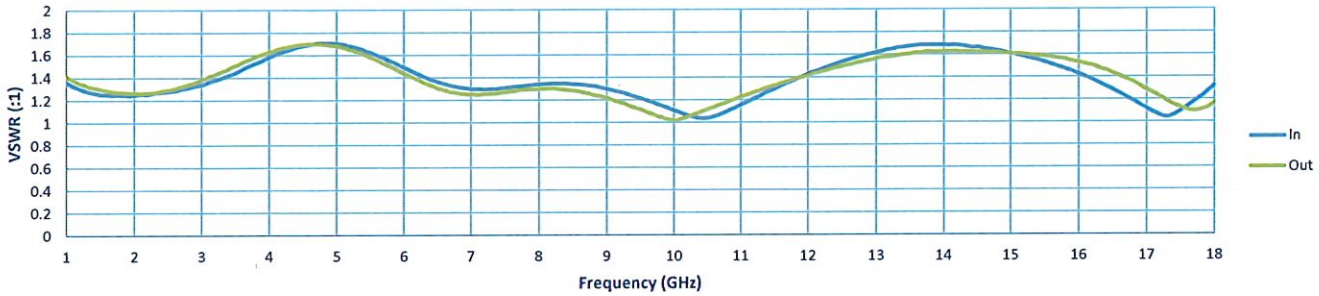


## Limiter Response with Frequency

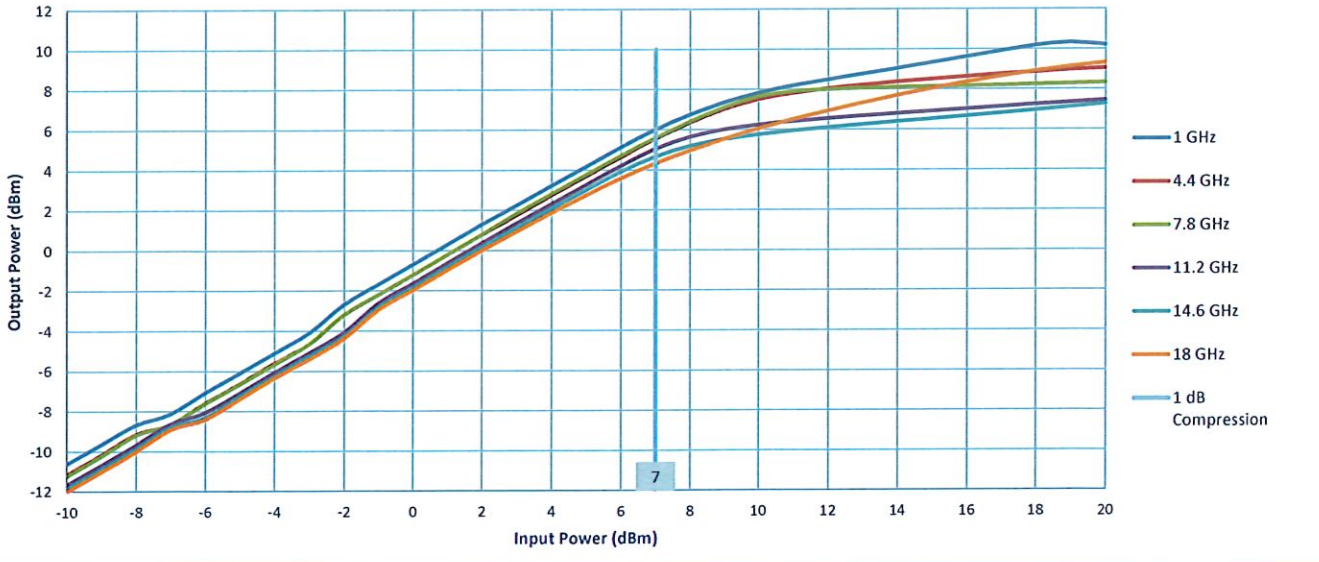



7309-A Grove Road Frederick, MD 21704 USA Phone: (301) 662-5019 Fax: (301) 662-1731
Email: sales@pmi-rf.com