

SUMMARY TEST DATA ON PEC-40/25-218-21-12-SFF-TTLVG Rev B

Customer: _____
SO No: _____
Model No: PEC-40/25-218-21-12-SFF-TTLVG Rev B
Serial No: PL62705/2640

Tested By: Hernandez N.
Temperature: -25°C, +25°C, +75°C
Date: 9/30/2026
Drawing No: 27605737 REV: B1

Test Item No.	PARAMETERS	SPECIFIED VALUE	MEASURED VALUE	QA/QC
1	Frequency Range:	2 – 18 GHz	2 – 18 GHz	PMI QA5
2	Gain @ -25°C: Max. Gain Position Min. Gain Position	+42dB ± 2.0dB Max +27dB ± 2.0dB Max	42.92 dB Max, 40.22 dB Min 26.83 dB Max, 25.19 dB Min	< 40 dB < 25 dB
3	Gain @ +25°C: Max. Gain Position Min. Gain Position	+40dB ± 2.0dB Max +25dB ± 2.0dB Max	41.83 dB Max, 40.19 dB Min 26.02 dB Max, 24.82 dB Min	PMI QA5
4	Gain @ +75°C: Max. Gain Position Min. Gain Position	+37dB ± 2.0dB Max +22dB ± 2.0dB Max	39.99 dB Max, 38.19 dB Min 24.94 dB Max, 23.05 dB Min	> 39 dB > 24 dB
5	Pout @ 1dB Compression @ -25°C: Max. Gain Position Min. Gain Position	+21dBm Min. +20dBm Min.	23 dB Min 22.6 dB Min	PMI QA5
6	Pout @ 1dB Compression @ +25°C: Max. Gain Position Min. Gain Position	+21dBm Min. +20dBm Min.	22.7 dB Min 22.2 dB Min	PMI QA5
7	Pout @ 1dB Compression @ +75°C: Max. Gain Position Min. Gain Position	+20dBm Min. +20dBm Min.	22.4 dB Min 21.5 dB Min	PMI QA5
8	Saturated Output Power (Both Gains) Over Operating Temperature Range:	+26dBm. Max.	+24.5dBm.	> 26 dB
9	Noise @ -25°C: Max. Gain Position Min. Gain Position	+3.8 dB Max. +6.0 dB Max.	4 dB Max 4.03 dB Max	PMI QA5
10	Noise @ +25°C: Max. Gain Position Min. Gain Position	+4.5 dB Max. +7.0 dB Max.	4.27 dB Max 4.52 dB Max	PMI QA5
11	Noise @ +75°C: Max. Gain Position Min. Gain Position	+5.0 dB Max. +8.0 dB Max.	4.79 dB Max 5.07 dB Max	PMI QA5
12	VSWR In/Out:	2.0:1 Max.	1.66:1 dB (In) -25C 1.85:1 dB (Out) 1.63:1 dB (In) +25C 1.78:1 dB (Out) 1.66:1 dB (In) +75C 1.75:1 dB (Out)	PMI QA5
13	Input/Output Impedance:	50Ω Nominal	50Ω Nominal	PMI QA5
14	Input Power Without Damage	+20dBm CW Max	+20dBm CW Max	PMI QA5
15	In-Band Harmonics @ or below the 1dB Compression Point	-10dBc Min.	-10dBc	PMI QA5
16	Pulse Rise Time with Input Signals up to -20dBm	<5ns	<5ns By Design	PMI QA5
17	Pulse Overshoot with Input Signals up to -20dBm	<0.5dB	<0.5dB By Design	PMI QA5

**SUMMARY TEST DATA
ON
PEC-40/25-218-21-12-SFF-TTLVG Rev B**

PL62705/2640

18	Pulse Droop with pulses up to 250u in Duration and Input Signals up to -20dBm	<2.0dB	<2.0dB By Design		PMI QA5
19	Pulse Recovery Time with pulses up to 250u in Duration and Input Signals up to -20dBm	15ns	15ns By Design		
20	Gain Switching Time	<500ns	226ns		
21	Gain Switch Control:	TTL High "1" - Max. Gain TTL Low "0" - Min. Gain	TTL High "1" - Max. Gain TTL Low "0" - Min. Gain		
22	DC Supply:	780mA Max@ +12V ±5% Max Gain Position. 610mA Max@ +12V ± 5% Min Gain Position.	510mA Max Gain 470mA Min Gain	-25C	PMI QA5
			510mA Max Gain 470mA Min Gain	+25C	
			510mA Max Gain 470mA Min Gain	+75C	

QA/QC

Joseph Leyda

DATE:

9/30/26

SUMMARY TEST DATA ON PEC-40/25-218-21-12-SFF-TTLVG Rev B

PL62705/2640

Technical Sheet

DESCRIPTION:

PLANAR MONOLITHICS INDUSTRIES MODEL NUMBER PEC-40/25-218-21-12-SFF-TTLVG IS A DUAL GAIN AMPLIFIER THAT OPERATES BETWEEN THE FREQUENCY RANGE 2 TO 18GHz.

SPECIFICATIONS:

- FREQUENCY RANGE: 2.0 TO 18.0 GHz
- GAIN @ -25°C
 - MAX GAIN POSITION: +42dB ±2dB MAX
 - MIN GAIN POSITION: +27dB ±2dB MAX
- GAIN @ +25°C
 - MAX GAIN POSITION: +40dB ±2dB MAX
 - MIN GAIN POSITION: +25dB ±2dB MAX
- GAIN @ +75°C
 - MAX GAIN POSITION: +37dB ±2dB MAX
 - MIN GAIN POSITION: +22dB ±2dB MAX
- Pout @ 1dB COMPRESSION @ -25°C
 - MAX GAIN POSITION: +21dB MIN
 - MIN GAIN POSITION: +20dB MIN
- Pout @ 1dB COMPRESSION @ +25°C
 - MAX GAIN POSITION: +21dB MIN
 - MIN GAIN POSITION: +20dB MIN
- Pout @ 1dB COMPRESSION @ +75°C
 - MAX GAIN POSITION: +20dB MIN
 - MIN GAIN POSITION: +20dB MIN
- SATURATED OUTPUT POWER (BOTH GAINS) OVER OPERATING TEMP RANGE: +26dBm MAX
- NOISE @ -25°C
 - MAX GAIN POSITION: +3.8dB MAX
 - MIN GAIN POSITION: +6.0dB MAX
- NOISE @ +25°C
 - MAX GAIN POSITION: +4.5dB MAX
 - MIN GAIN POSITION: +7.0dB MAX
- NOISE @ +75°C
 - MAX GAIN POSITION: +5.0dB MAX
 - MIN GAIN POSITION: +8.0dB MAX
- VSWR IN/OUT: 2.0:1 MAX
- INPUT/OUTPUT IMPEADANCE: 50Ω NOMINAL
- INPUT POWER (WITHOUT DAMAGE): +20dBm CW MAX
- IN-BAND HARMONICS @ OR BELOW THE 1dB COMPRESSION POINT: -10dBc MIN
- SPURIOUS OUTPUT SIGNAL @ ANY SIGNAL LEVEL UP TO THE MAX INPUT LEVEL: -60dBc MAX
- PULSE RISE TIME WITH INPUT SIGNALS UP TO 20dBm: <5ns
- PULSE OVERSHOOT WITH INPUT SIGNALS UP TO 20dBm: <0.5dB
- PULSE DROOP WITH THE FOLLOWING PULSES UP TO 250μs IN DURATION INPUT SIGNAL UP TO -20dBm: <2.0dB
- PULSE RECOVERY TIME WITH THE FOLLOWING PULSES UP TO 250μs IN DURATION INPUT SIGNAL UP TO -20dBm: 15ns
- GAIN SWITCHING TIME: <500ns
- GAIN SWITCHING CONTROL: TTL HIGH "1" - MAX GAIN
TTL HIGH "0" - MIN GAIN
- DC SUPPLY: 780mA MAX @ +12V ±5% MAX GAIN POSITION
610mA MAX @ +12V ±5% MIN GAIN POSITION
- FINISH: PAINTED BLUE (MOUNTING SURFACE FREE OF PAINT, GOLD)



ENVIRONMENTAL RATINGS:

- TEMPERATURE: -55°C TO +85°C (OPERATING)
-65°C TO +125°C (STORAGE)
- HUMIDITY: MIL-STD-202F, METHOD 103B COND. B
- SHOCK: MIL-STD-202F, METHOD 213B COND. B
- VIBRATION: MIL-STD-202F, METHOD 204D COND. B
- ALTITUDE: MIL-STD-202F, METHOD 105C COND. B
- TEMPERATURE CYCLE: MIL-STD-202F, METHOD 107D COND. A

NOTE: SPECIFICATIONS WILL VARY OVER TEMPERATURE



COND	REV	DESCRIPTION	DATE	APPROVED
	A1	ORIGINAL RELEASE	8/10/2012	
	A5	ECN # 22-0155	8/10/12	
	J1	ECN # 22-0155	12/10/12	

PMI CONFIDENTIAL AND PROPRIETARY

APPROVALS DATE M. HANKEN 8/10/2012		Quantic PMI PLANAR MONOLITHICS 7309-A GROVE ROAD, FREDERICK, MD 21704 USA TEL: (301) 662-5019 FAX: (301) 662-1731 WWW.QUANTICPMI.COM	
		TITLE: OUTLINE PART NO: PEC-40/25-218-21-12-SFF-TTLVG RevB REV: B 65X00 27005731 J1	
SCALE: 1:1		SHEET 1 OF 2	





SUMMARY TEST DATA ON PEC-40/25-218-21-12-SFF-TTLVG Rev B

PL62705/2640

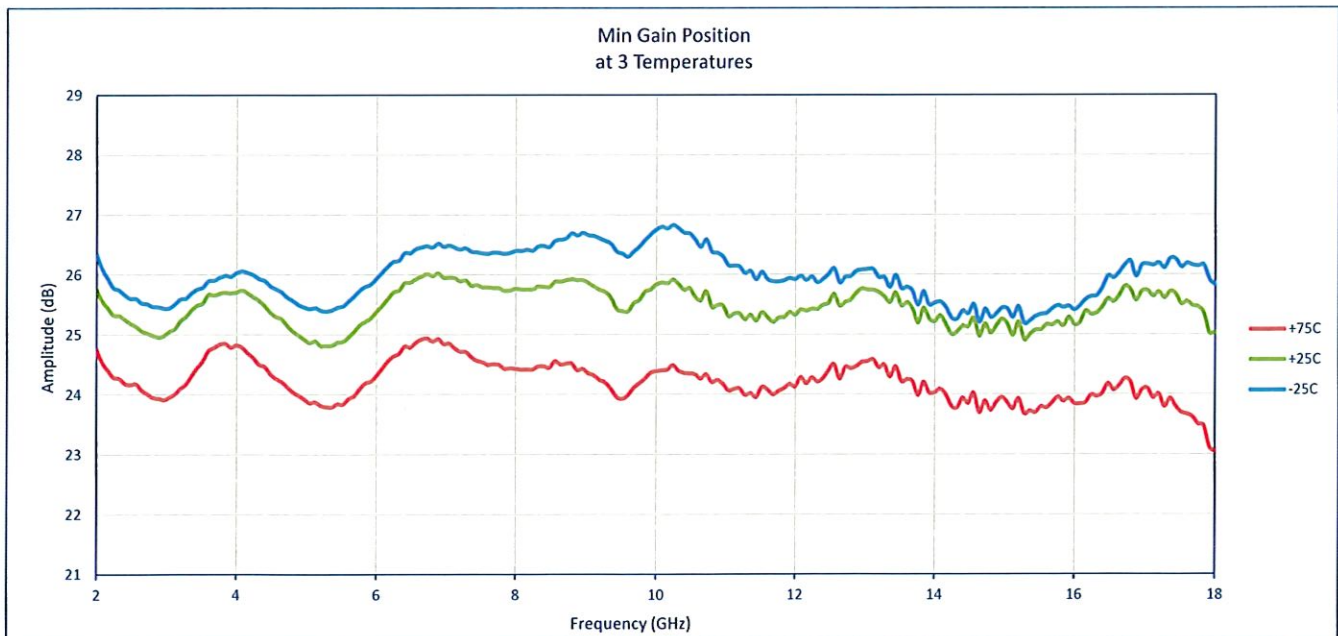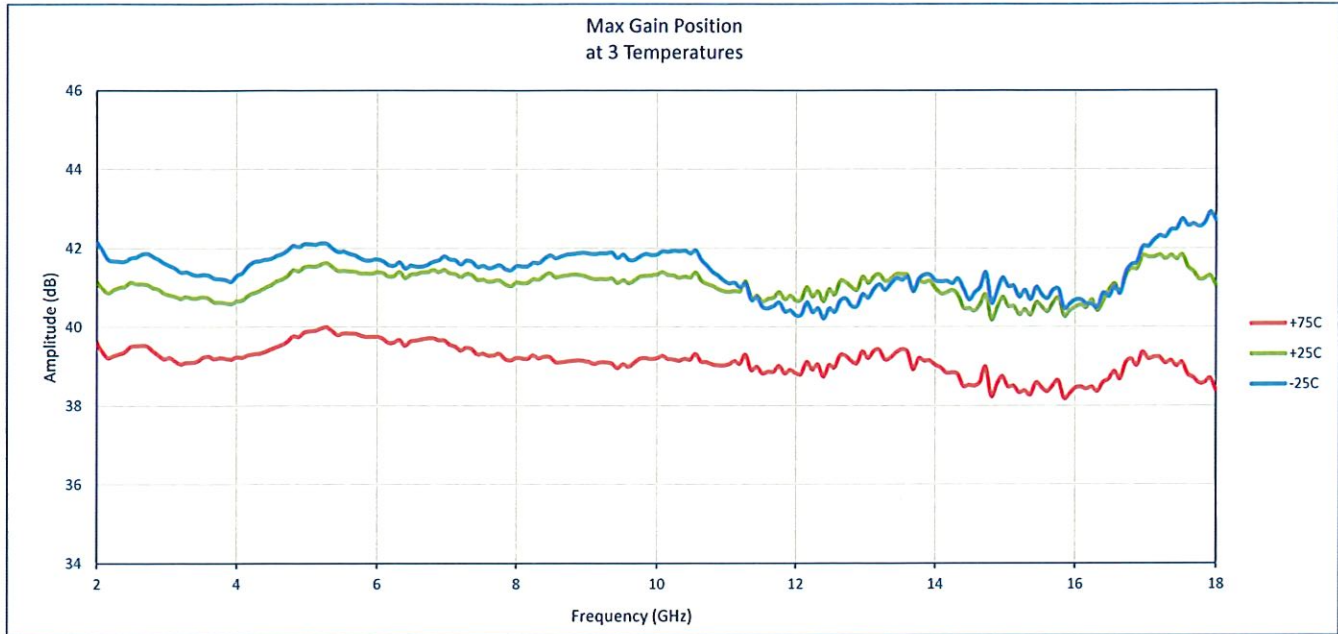





SUMMARY TEST DATA ON PEC-40/25-218-21-12-SFF-TTLVG Rev B

PL62705/2640

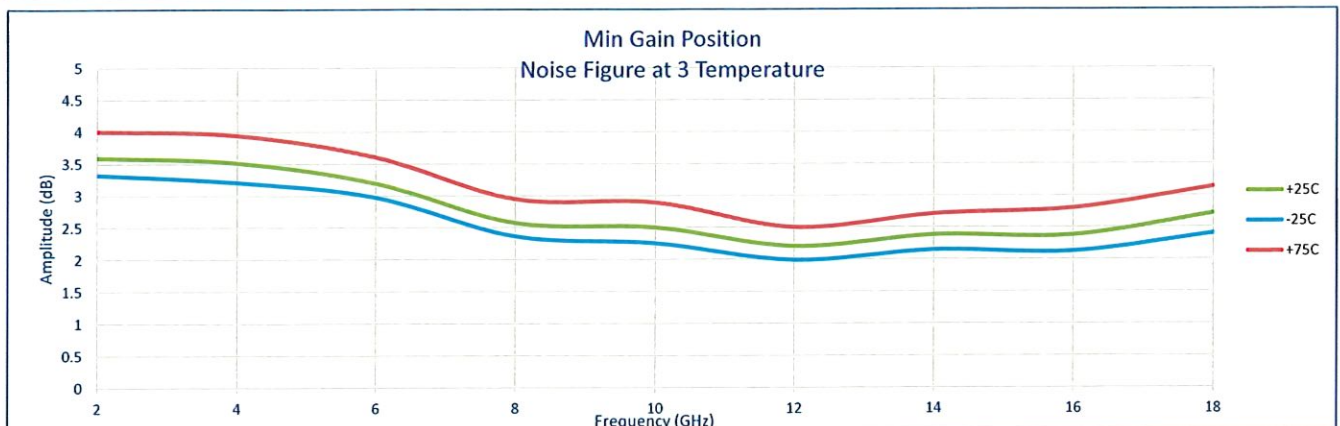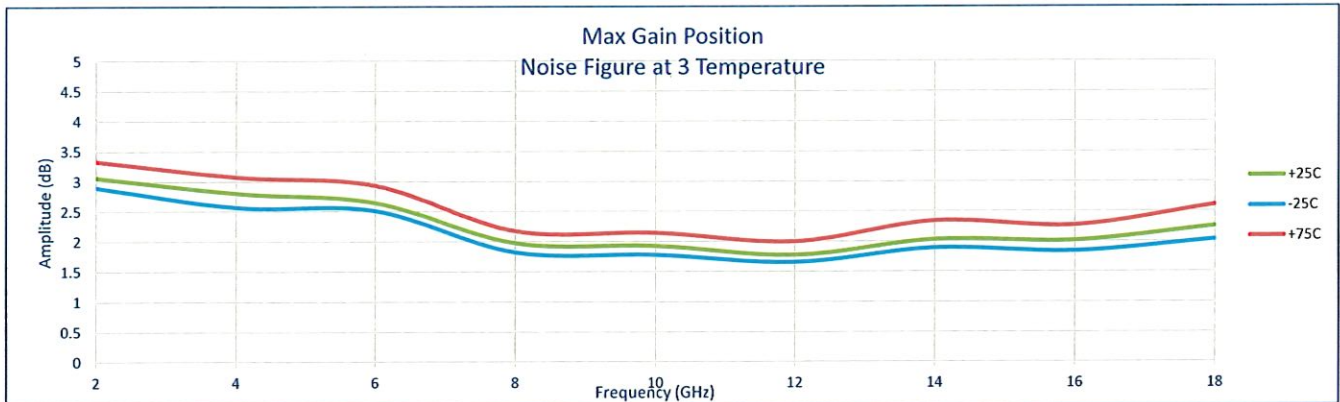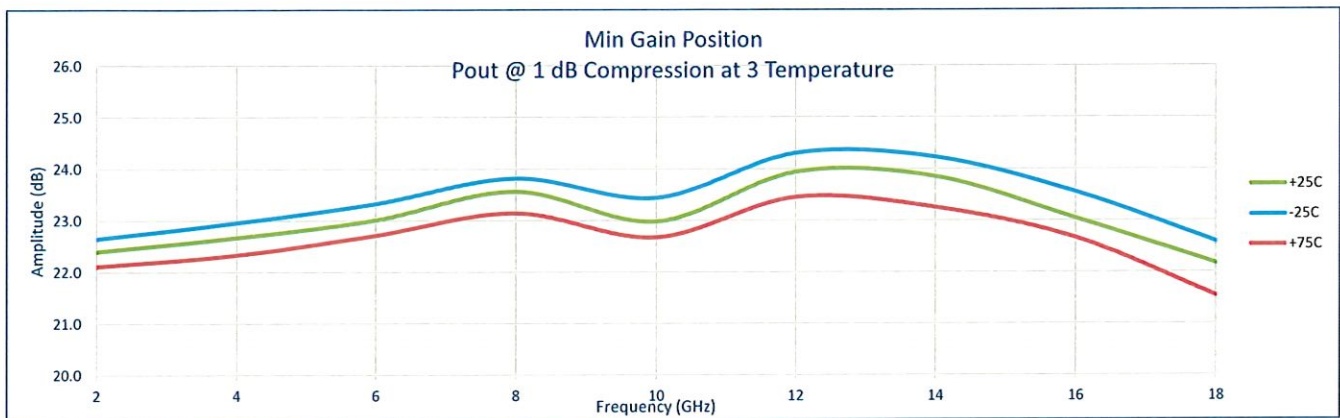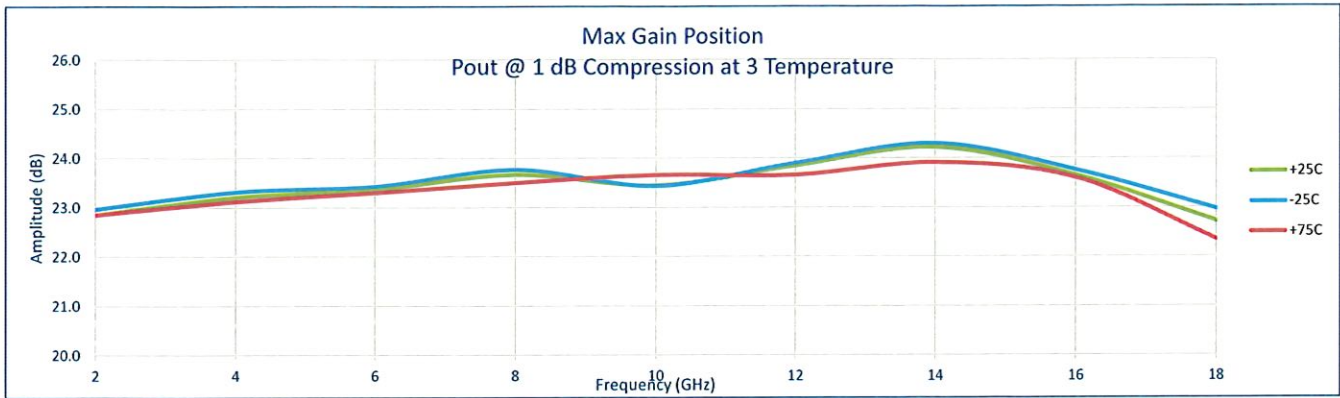

SUMMARY TEST DATA ON PEC-40/25-218-21-12-SFF-TTLVG Rev B

PL62705/2640

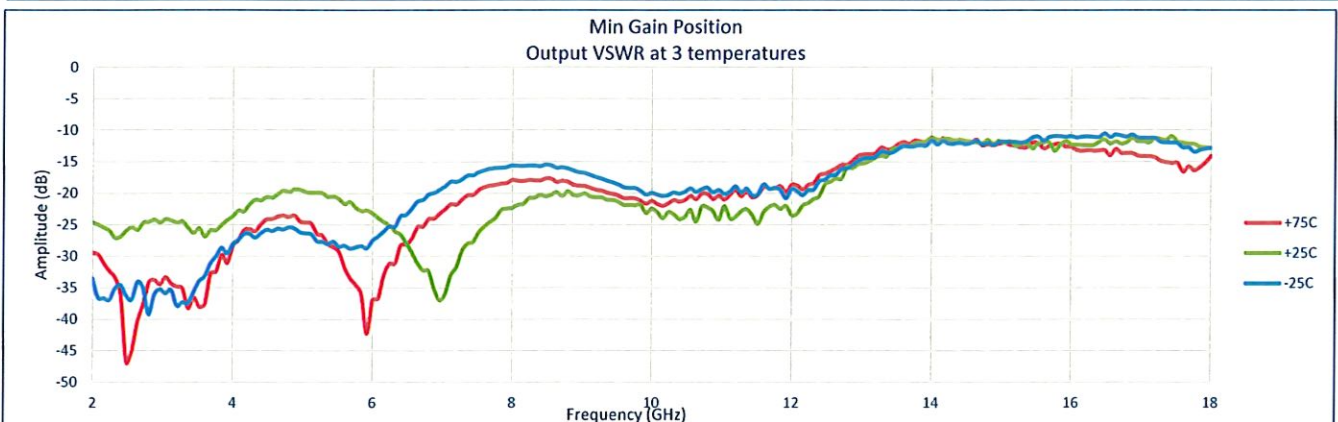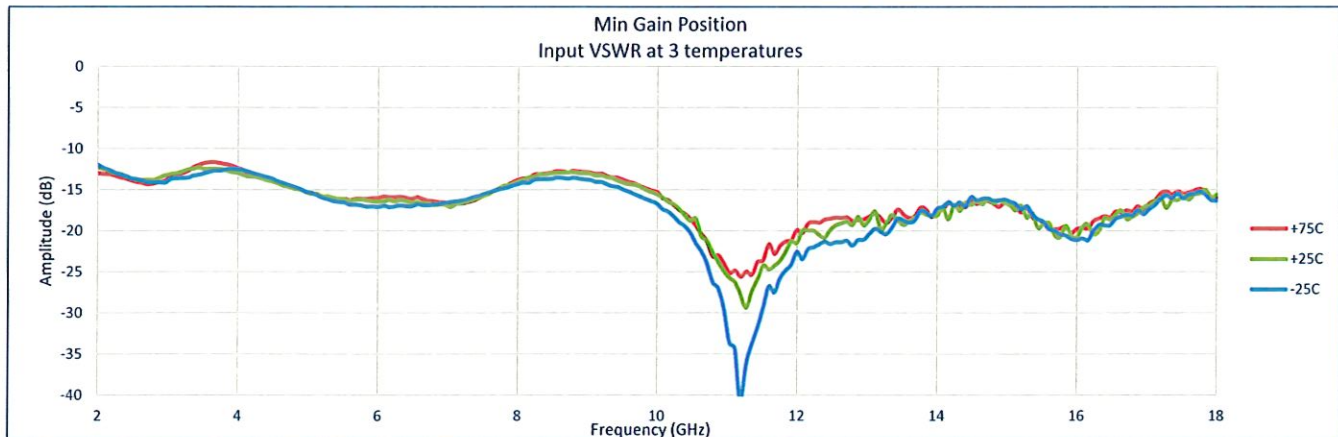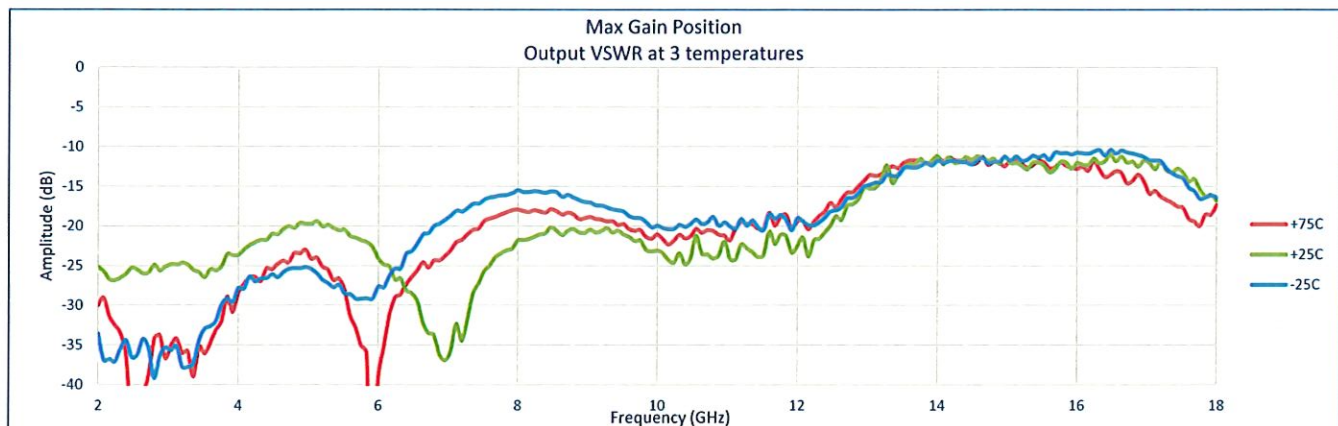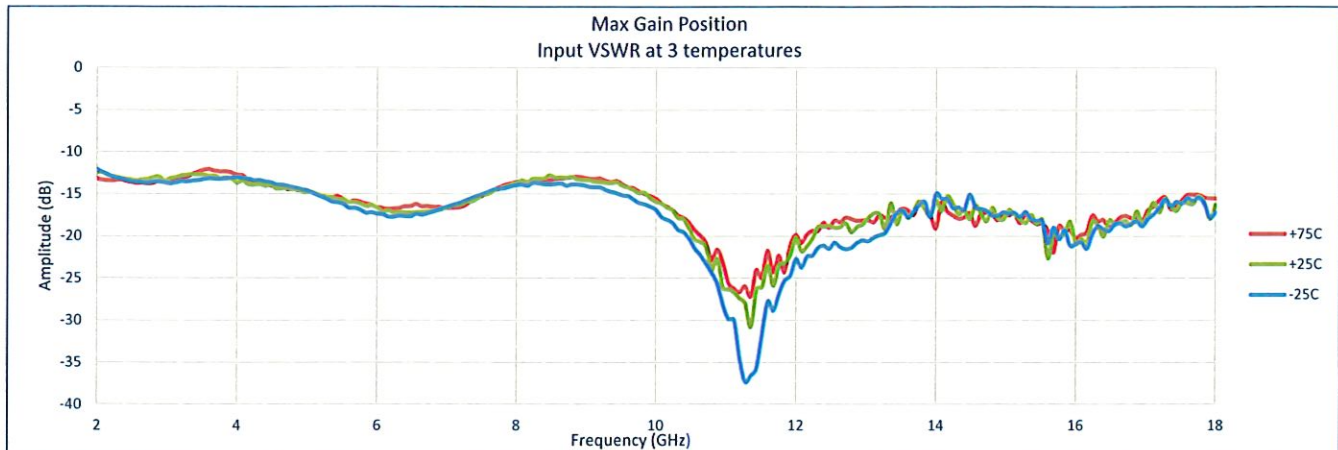

SUMMARY TEST DATA ON PEC-40/25-218-21-12-SFF-TTLVG Rev B

PL62705/2640

