

**SUMMARY TEST DATA
ON
P2T-1G18G-65-R-SFF**

81925

Customer: _____	Tested By: <u>E. Kretz</u>
SO No: _____	Temperature: <u>+25°C</u>
Model No: <u>P2T-1G18G-65-R-SFF</u>	Date: <u>06/4/18</u>
Serial No: <u>81925</u>	Drawing No: <u>27627202</u> Rev: <u>A1</u>
Part No: _____	

TEST. ITEM NO	PARAMETERS	SPECIFIED VALUE	TEST RESULTS	QA QC	
1	Frequency Range	1.0 TO 18.0 GHz	1.0 TO 18.0 GHz	PMI QA 2	
2	Insertion Loss	2.5 dB Typ	2.28 dB (See Plot)	↑	
3	VSWR	2.0:1 Max	1.85 :1 (See Plot)		
4	Isolation	65 dB Typ	77 dB (See Plot)		
5	Switching Speed	100 ns Max	36.80 ns See Typical Characteristics		
6	Input Power	+30dBm Max (Survival) +20dBm Max (Operating)	Pass		
7	DC Supply	+5VDC @ 100 mA Typ -15VDC @ 75 mA Typ	24 mA 34 mA		
8	Control Signal	LOGIC TABLE FUNCTION CTL 0 J1-J2 "LOW LOSS" 1 J1-J3 "LOW LOSS"	Pass		PMI QA 2

QA/QC Approval:  PMI QA 2 Date: 6/5/18


SUMMARY TEST DATA ON P2T-1G18G-65-R-SFF

81925

(J1 - J2) Insertion Loss and Return Loss



(J1 - J2) Isolation

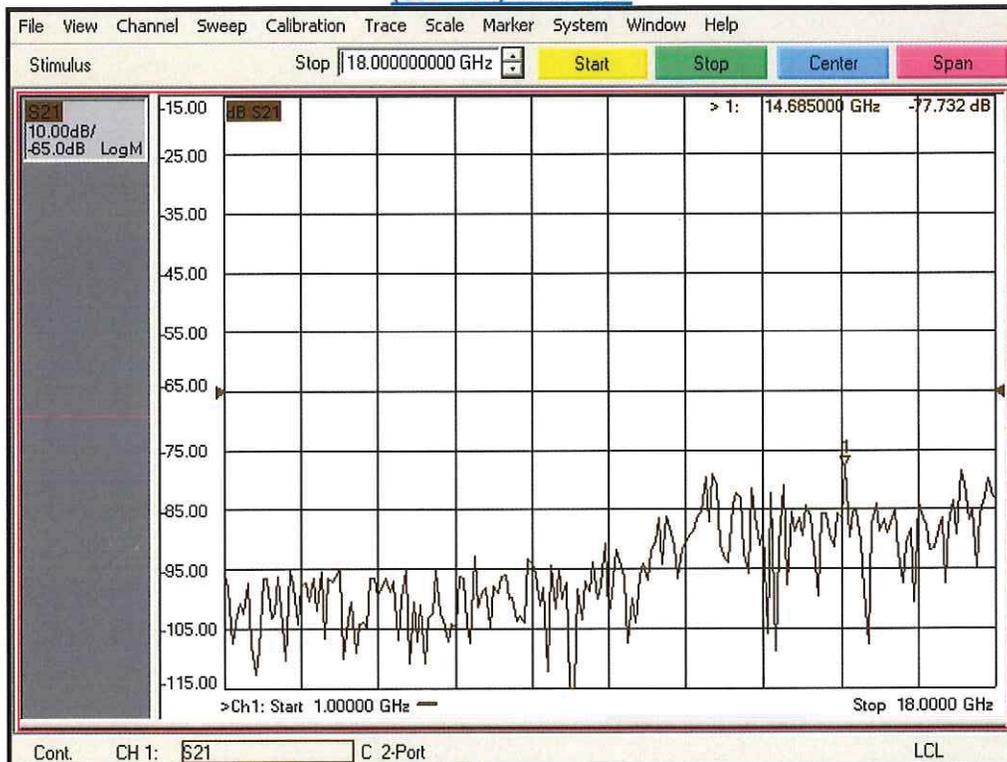

SUMMARY TEST DATA ON P2T-1G18G-65-R-SFF

81925

(J1 – J3) Insertion Loss and Return Loss



(J1 – J3) Isolation

