



### SUMMARY TEST DATA ON AMPLIFIER

<b>Customer :</b> <b>Job No :</b> <b>Model No :</b> <u>PTB-30-0R12-5R0-20-115VAC-NFF-2U</u> <b>Serial No :</b> <u>PL8867</u>	<b>Tested By :</b> <u>Hugo Gonzales</u> <b>Temperature :</b> <u>+25°C</u> <b>Date :</b> <u>04/4/11</u>
---	--


TEST ITEM NO.	PARAMETERS	SPECIFIED VALUE	MEASURED VALUE	REMARKS QA/QC
1	Frequency Range:	0.1 – 2.0GHz	Pass (See Plot)	
2	Gain Min.:	+30dB	Pass (See Plot)	
3	Flatness:	±1.5 dB Max	±0.56dB	
4	Noise Figure:	5.0dB Max.	Pass (See NF Plot)	
5	Pout @ 1dB Compression:	+20 dBm Min.	≥ +20 dBm	
6	VSWR:	Input : 2.0:1 Output: 2.0:1 Max.	Pass (See Plot)	
7	AC Supply:	110-115VAC 60Hz	Pass	

Production Manager Approval: \_\_\_\_\_ Date: \_\_\_\_\_

QA/QC Approval: \_\_\_\_\_ Date: \_\_\_\_\_



## Gain Plot (S21)

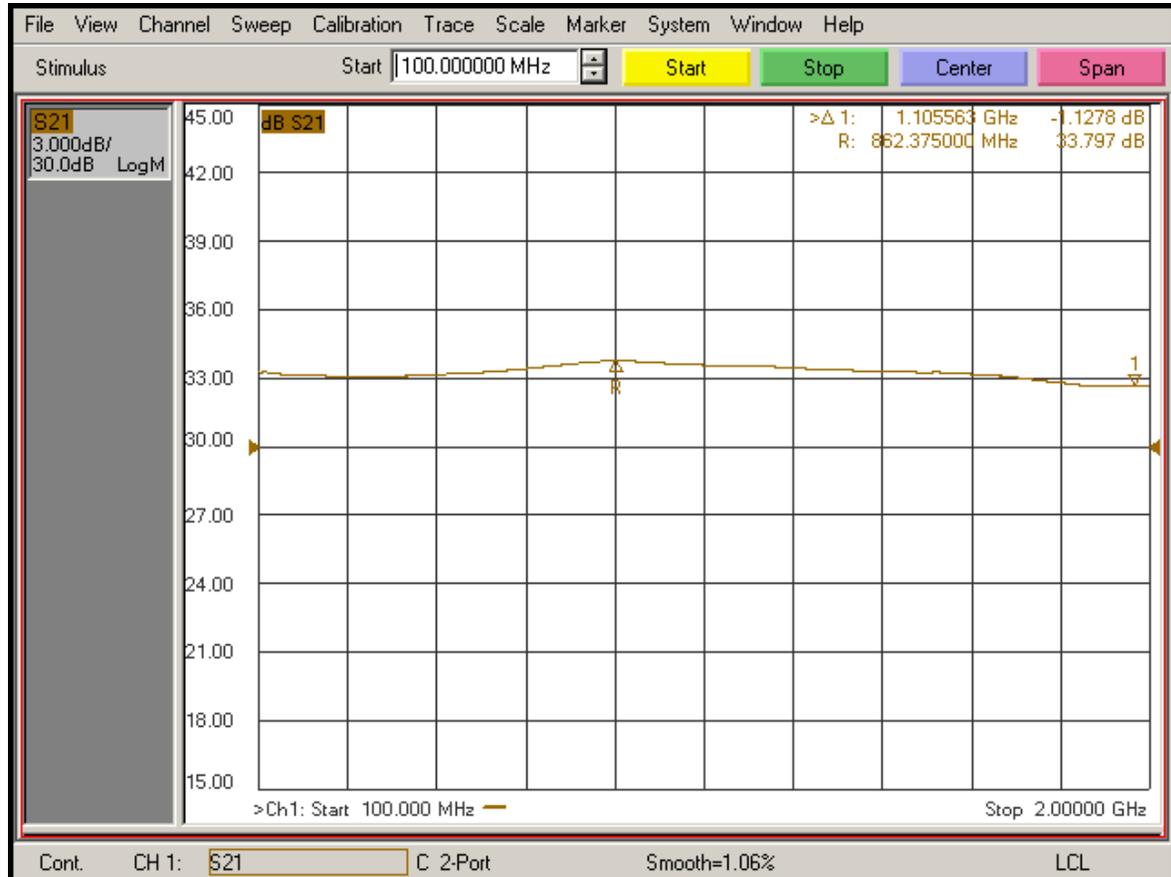



## Input VSWR Plot (S11)





## Output VSWR Plot (S22)





## Noise Figure Plot

