

DESCRIPTION

PMI MODEL: DLVA-8G10G-80-50-SFF IS A 8.0 GHz TO 10.0 GHz DETECTOR LOG VIDEO AMPLIFIER. ITS DYNAMIC RANGE IS -75dBm TO +0dBm. ITS LOG LINEARITY IS ± 1.8 dB AND ITS LOG SLOPE IS 50 ± 4 mV/dB.

SPECIFICATIONS

- FREQUENCY: ----- 8 GHz TO 10 GHz
- DYNAMIC RANGE: ----- -75 dBm TO +0 dBm
- FREQUENCY FLATNESS: ----- ± 1.2 dB
- TSS.: ----- -80 dBm
- LOG LINEARITY: ----- ± 1.8 dB
- LOG SLOPE: ----- 50 ± 4 mV/dB
- OUTPUT DC OFFSET: ----- 50 ± 50 mV
- RISE TIME: ----- 70 ns
- FALL TIME: ----- 150 ns
- RECOVERY TIME: ----- 500 ns FOR 10.0 μ s PW
- SUPPLY: ----- +15V 350 mA
-15V 100 mA
- FINISH: ----- ELECTROLESS NICKEL PLATE
.0005 TO .0007 THK PER
AMS 2404.

ENVIRONMENTAL RATINGS

- TEMPERATURE: ----- -54 °C TO +95 °C (OPERATING)
-65 °C TO +125 °C (STORAGE)
- HUMIDITY: ----- MIL-STD-202, METHOD 103B COND. B
Maintain RH 95 \pm 4% @ 63 °C (exceptively allowed
RF 85% when temperature-down transition time.)
The rate of temperature change : Above
8 °C/hours
Time : Min.10 period (1period = 24
hours),Min.1time test every 5 period
- SHOCK: ----- MIL-STD-202, METHOD 213, COND J
20G (DURING OPERATION) & 125g, 6 ms saw
tooth type, 3-Axis (No operation)
- VIBRATION: ----- MIL-STD-202, METHOD 214, COND A
12G 30 MIN, X,Y,Z-AXIS(DURING OPERATION)
& 20G 30min, X, Y, Z-AXIS (During operation)
- ALTITUDE: ----- MIL-STD-202, METHOD 105C, COND B
200Km (8.47e-7 hPa or 6.353e-7 torr/DURING
OPERATION)
- TEMPERATURE CYCLE: ----- MIL-STD-202, METHOD 107D COND. A

NOTE: SPECIFICATIONS WILL VARY OVER OPERATING TEMPERATURE


NOTE: THE ABOVE SPECIFICATIONS ARE SUBJECT TO CHANGE OR REVISION

ALL DIMENSIONS
ARE IN INCHES (mm)
TOLERANCES:
X,XX ± 0.020
X,XXX ± 0.010

PMI CONFIDENTIAL AND PROPRIETARY

REVISIONS				
ZONE	REV.	DESCRIPTION	DATE	APPROVED
	-	PRELIMINARY	09/22/2016	

MECHANICAL OUTLINE

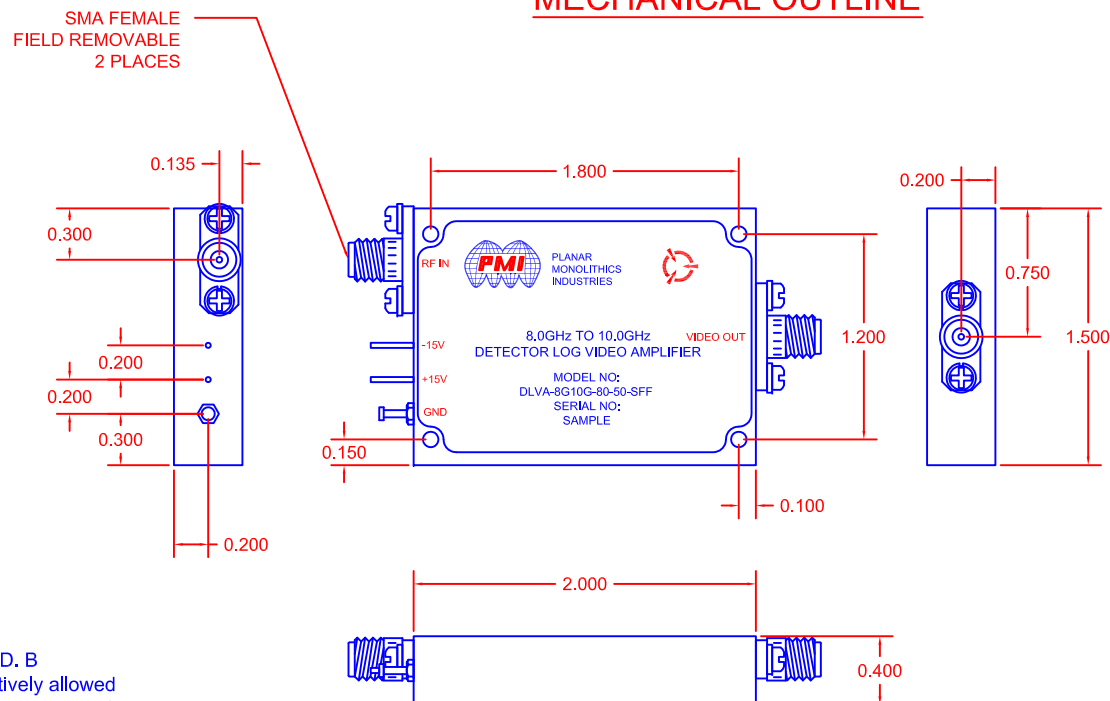

PLANAR MONOLITHICS INDUSTRIES, INC.

7311-F GROVE ROAD

FREDERICK, MARYLAND 21704 USA

TEL: (301)-662-5019, FAX: (301)-662-1731

WEB: www.pmi-rf.com, EMAIL: sales@pmi-rf.com

ISO 9001 CERTIFIED



APPROVALS		DATE		TITLE	
DRAWN		09/22/2016		PRODUCT FEATURE	
CHECKED				8GHz TO 10GHz DLVA	
ISSUED				DLVA-8G10G-80-50-SFF	
SIZE		FSCM NO.		DWG NO.	
A		05XQ0		PRELIMINARY	
SCALE		N:S		SHEET	
				1 OF 1	