

## DESCRIPTION


PMI MODEL: 5CL5G-2G-CD-SFF is a Comblane Bandpass filter with SMA female connectors in and out. All filters will be machined and silver plated to provide the highest possible Q.

REVISIONS				
ZONE	REV.	DESCRIPTION	DATE	APPROVED
	1	ORIGINAL RELEASE	8/31/15	
	A1	ECN #15-0160	11/23/15	

## MECHANICAL OUTLINE

## SPECIFICATIONS

- CENTER FREQUENCY: ----- 5000 MHz
- 3dB BANDWIDTH: ----- 2000 MHz
- INSERTION LOSS (PASSBAND): ----- < 1 dB MAXIMUM
- ISOLATION: ----- 60 dB MINIMUM
- VSWR IN THE PASSBAND: ----- 1.5:1 MAXIMUM
- REJECTION @ 5 POLE RESPONSE
- RF CONNECTORS: ----- SMA FEMALE (2X)
- SIZE: ----- 1.30" (L) X .60" (W) X .40" (H)
- WEIGHT: ----- 1 OZ. TYP.

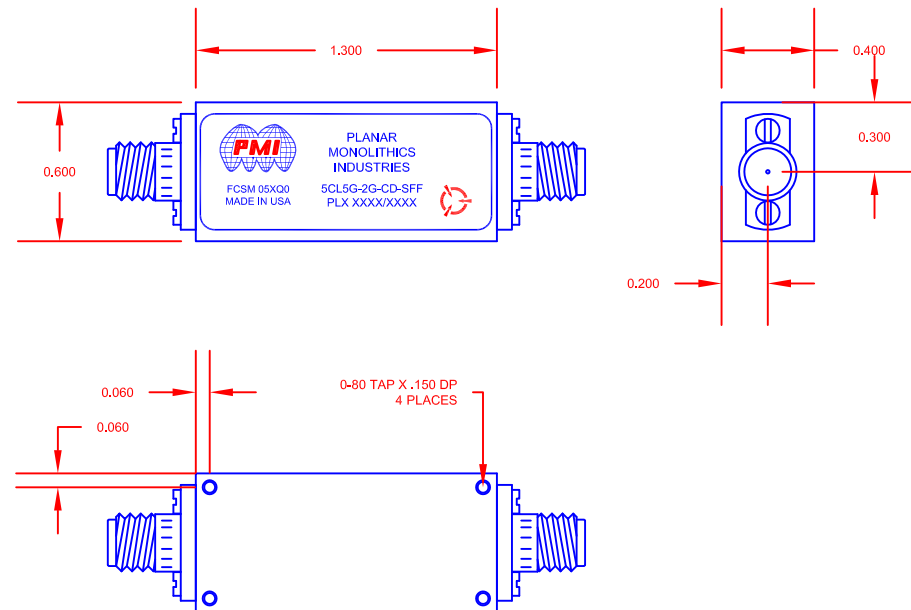

## ENVIRONMENTAL RATINGS

- TEMPERATURE: ----- -55 °C TO +85 °C (OPERATING)  
----- -65 °C TO +125 °C (STORAGE)
- HUMIDITY: ----- MIL-STD-202F, METHOD 103B COND. B
- SHOCK: ----- MIL-STD-202F, METHOD 213B COND. B
- VIBRATION: ----- MIL-STD-202F, METHOD 204D COND. B
- ALTITUDE: ----- MIL-STD-202F, METHOD 105C COND. B
- TEMPERATURE CYCLE: ----- MIL-STD-202F, METHOD 107D COND. A

NOTE: SPECIFICATIONS WILL VARY OVER OPERATING TEMPERATURE  
NOTE: THE ABOVE SPECIFICATIONS ARE SUBJECT TO CHANGE OR REVISION

ALL DIMENSIONS ARE IN INCHES  
TOLERANCES:  
X.XX ±0.020  
X.XXX ±0.010

**PMI CONFIDENTIAL AND PROPRIETARY**

**PLANAR MONOLITHICS INDUSTRIES, INC.**  
7311-F GROVE ROAD  
FREDERICK, MARYLAND 21704 USA  
TEL: (301)-662-5019, FAX: (301)-662-1731  
WEB: www.pmi-rf.com, EMAIL: sales@pmi-rf.com  
ISO 9001 CERTIFIED



APPROVALS		DATE	TITLE		
DRAWN <i>SAB</i>		8/31/15	PRODUCT FEATURE 5CL5G-2G-CD-SFF		
CHECKED			SIZE A	FCSM NO. 05XQ0	DWG NO. 27025291
ISSUED			SCALE N:S	SHEET 1 OF 1	REV. A1