DESCRIPTION

PMI MODEL: PE2-45-1R06R0-4R5-15-12-SFF IS A LOW NOISE AMPLIFIER DESIGNED FOR MILITARY AND INDUSTRIAL APPLICATIONS. THIS AMPLIFIER IS SUPPLIED IN OUR PE2 HOUSING THAT CAN BE USED AS AN SMA CONNECTORIZED OR SURFACE MOUNTED COMPONENT. OTHER PACKAGES AND CONNECTOR TYPES ARE AVAILABLE. DATA IS AVAILABLE UPON REQUEST.

SPECIFICATIONS

- FREQUENCY RANGE: ----- 1.0 TO 6.0 GHz
- GAIN: ----- 45 dB TYPICAL
- GAIN FLATNESS: ----- ±1.25 dB MAXIMUM
- NOISE FIGURE: ----- 4.5 dB TYPICAL
- OP1dB: -----+13 dBm MINIMUM
- VSWR (INPUT/OUTPUT): ----- 2.0:1 MAXIMUM
- DC VOLTAGE SUPPLY: ----- +12 TO +15 VDC
- DC CURRENT DRAW: ----- 200 mA TYPICAL
- CONNECTORS: ----- SMA FEMALE (X2)
- FINISH: ----- GOLD PLATED

FEATURES

- INTERNAL VOLTAGE REGULATION
- UNCONDITIONAL STABILITY
- STANDARD OPERATING TEMPERATURE (-20 °C TO +70 °C)

AVAILABLE OPTIONS

- VARIOUS PACKAGE TYPES
- VARIOUS CONNECTOR TYPES
- TEMPERATURE COMPENSATION
- HERMETIC SEALING
- GAIN AND PHASE MATCHING
- MIL-STD-883 SCREENING AVAILABLE

ENVIRONMENTAL RATINGS

- TEMPERATURE: ----- -20 °C TO +70 °C (OPERATING)
 - -55 °C TO +85 °C (AVAILABLE)
 - -65 °C TO +125 °C (STORAGE)
- HUMIDITY: ----- MIL-STD-202F, METHOD 103B COND. B
- SHOCK: ----- MIL-STD-202F, METHOD 213B COND. B
- ALTITUDE: ----- MIL-STD-202F, METHOD 105C COND. B
- TEMPERATURE CYCLE: ----- MIL-STD-202F, METHOD 107D COND. A ALL DIMENSIONS ARE IN INCHES


NOTE: SPECIFICATIONS WILL VARY OVER OPERATING TEMPERATURE
NOTE: THE ABOVE SPECIFICATIONS ARE SUBJECT TO CHANGE OR REVISION

LL DIMENSIONS ARE IN INCHES
TOLERANCES:
X.XX ±0.020
X.XXX ±0.010


PMI CONFIDENTIAL AND PROPRIETARY

| REVISIONS | | | | |
|-----------|------|-------------|---------|----------|
| ZONE | REV. | DESCRIPTION | DATE | APPROVED |
| | - | PRELIMINARY | 1/21/16 | |
| | | | | |
| | | | | |

PE2 HOUSING WITH CARRIER

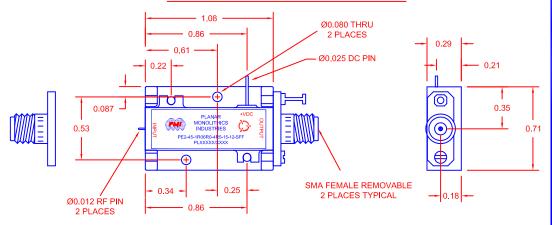

PE2 HOUSING WITHOUT CARRIER (SURFACE MOUNT)

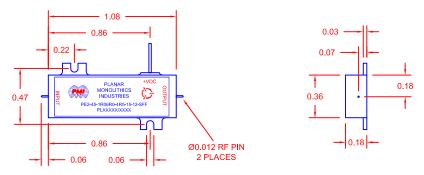

PLANAR MONOLITHICS INDUSTRIES, INC.

7311-F GROVE ROAD FREDERICK, MARYLAND 21704 USA TEL: (301)-662-5019, FAX: (301)-662-1731 WEB: www.pmi-rf.com, EMAIL: sales@pmi-rf.com

v.pmi-rf.com, EMAIL: sales@pmi-r ISO 9001 CERTIFIED

