DESCRIPTION:

PFC model number CL12D57-300-CD-SFF is a Combline filter with SMA female connectors in and out. All filters will be machined and silver plated to provide the highest possible Q.

| | REVISIONS | | | | | | | | | | |
|------|-----------|------------------|---------|----------|--|--|--|--|--|--|--|
| ZONE | REV. | DESCRIPTION | DATE | APPROVED | | | | | | | |
| | - | ORIGINAL RELEASE | 6/20/00 | | | | | | | | |

SPECIFICATIONS:

• CENTER FREQUENCY: 12.57 GHz

• 3dB BANDWIDTH: 300 MHz


• VSWR IN THE PASS BAND: · 1.5:1 MAX.

 INSERTION LOSS (PASSBAND) -4 dB

• REJECTION FROM DC TO 12.37 GHz: -40 dB

• REJECTION FROM 12.87 TO 37.71 GHz: -40 dB






• CONNECTORS: SMA FEMALE CONNECTORS

SIZE · 2.25" (L) x 0.40" (W) x 0.50" (H)

• WEIGHT -· 1 OZ. TYP.

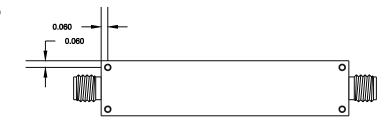

ENVIRONMENTAL RATINGS:

-55°C TO +85°C (OPERATING) • TEMPERATURE: -65°C TO +125°C (STORAGE)

MIL-STD-202F, METHOD 103B COND. B

• HUMIDITY:

• SHOCK: MIL-STD-202F, METHOD 213B COND. B

MIL-STD-202F, METHOD 204D COND. B VIBRATION:

MIL-STD-202F, METHOD 105C COND. B ALTITUDE: -

SALT FOG: MIL-STD-202F, METHOD 107D COND. A

• FUNGUS: MIL-STD-810C, METHOD 508.2

 TEMPERATURE CYCLE: MIL-STD-202F, METHOD 107 ALL DIMENSIONS ARE IN INCHES TOLERANCES: X.XX ±0.010 X.XXX ±0.005

| PF60-22 | Planar Filter Company 7311G Grove Road, Fredrick, Maryland | | | | | | | | |
|------------|--|------------------------------------|----------|-------|-----------|------------|-----------|------|------|
| APPROVALS | DATE | TITLE | 3110 | 31010 | 1000, 110 | GITOR, IVI | ai yiai k | | |
| S. PALACIO | 6/20/00 | OUTLINE DRAWING CL12D57-300-CD-SFF | | | | | | | |
| CHECKED | | CL12037-300-CD-5FF | | | | | | | |
| ISSUED | | SIZE | FSCM NO. | | DWG NO. | | | | REV. |
| | | Α | 1Q | JWO | | 155-0 | 289 | | _ |
| | | SCALE | N/A | | | | SHEET | 1 OF | 1 |

NOTE: THE ABOVE SPECIFICATIONS ARE SUBJECT TO CHANGE OR REVISION