

Description:

Part Number 27005022 (Model Number PE2-20-0R52-1R25-15-SFF) is a 0.5 to 2.0 GHz low noise amplifier. This amplifier is supplied in our standard PE2 housing that can be used as a SMA connectorized or a surface mount component.

This model provides the following performance. Data is available upon request.

Specifications:

Frequency Range:	0.5 to 2.0 GHz
Gain:	20dB Typ.
Gain Flatness:	+/- 1.5dB Max.
Noise Figure:	1.5dB Max.
OP1dB:	+18dBm Min.
VSWR Input/Output:	2.5:1 Max.
DC Voltage Supply:	+12 to +15VDC
DC Current Draw:	100mA Max.
Connectors In/Out	SMA Female

Features:

Internal Voltage Regulation
Unconditional Stability
Standard Operating Temperature -55 to +85 Deg. C

Available Options:


Various Package types
Various Connector types
Temperature Compensation
Gain and Phase Matching
MIL-STD-883 Screening Available

Environmental Ratings:


Temperature:	-55 to +85 Deg. C (Operating)
	-65 to +125 Deg. C (Storage)
Humidity:	MIL-STD-202F, METHOD 103B COND B.
Shock:	MIL-STD-202F, METHOD 213B COND B.
Altitude:	MIL-STD-202F, METHOD 105C COND B.
Temperature Cycle:	MIL-STD-202F, METHOD 107D COND A

Note: The above specifications are subject to change or revision.

PE2 HOUSING WITH CARRIER

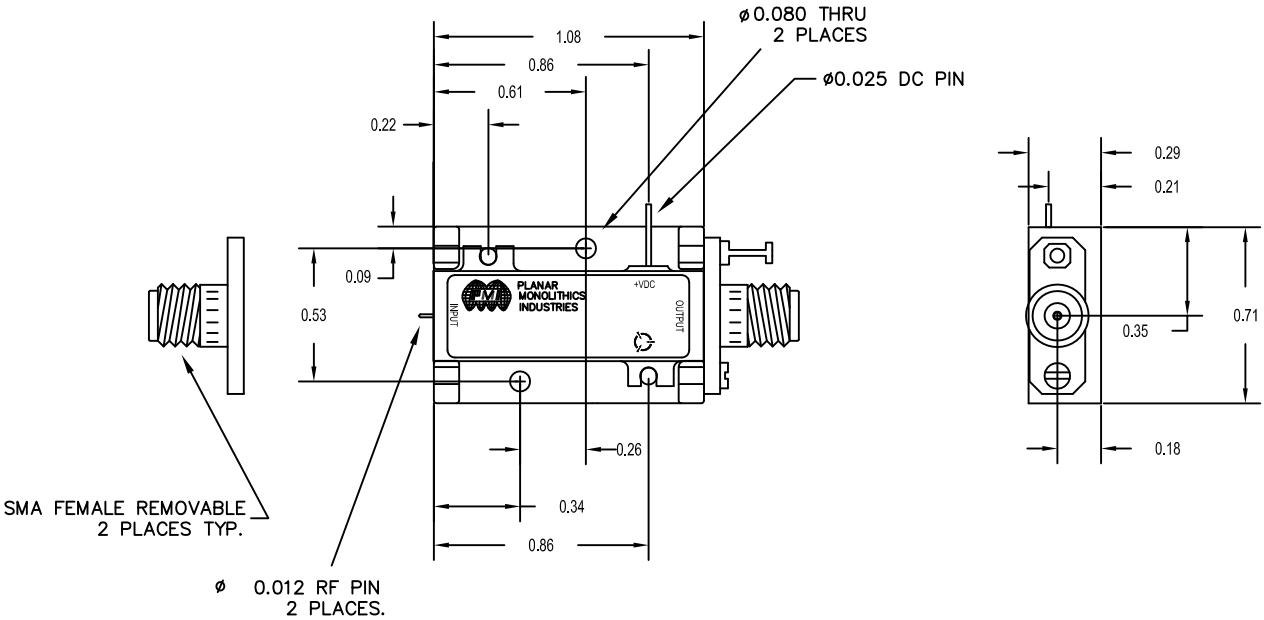

PE2 HOUSING WITHOUT CARRIER (SURFACE MOUNT)

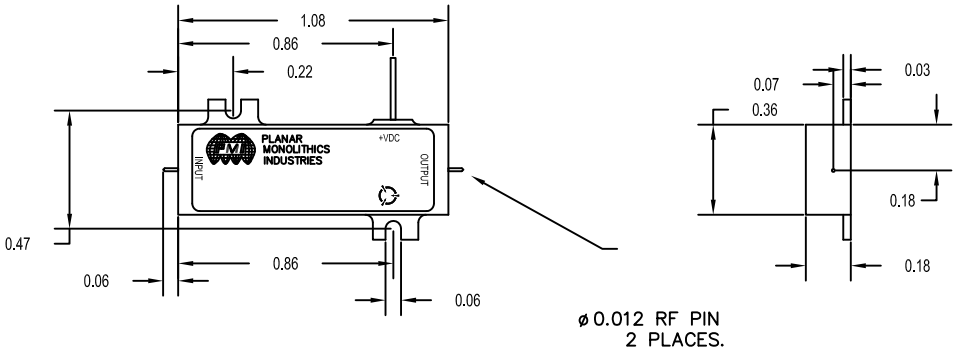

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN INCHES
TOLERANCES ARE:
FRACTIONS DECIMALS ANGLES
± .XX ± 0.010 ±
.XXX ± 0.005

MATERIAL: 6061-T6 Aluminum	PART NO.		7311-F GROVE ROAD FREDERICK, MARYLAND
	APPROVALS	DATE	
FINISH: GOLD PLATED	DRAWN DPD	3/9/10	TITLE PE2 Series Amplifier PE2-20-0R52-1R25-15-SFF
	Modified SFK	12/10/10	
DO NOT SCALE DRAWING	ISSUED		SIZE B
			CAGE CODE 05XQ0
			DWG NO. 27005022
			REV. A
			SCALE N/A
			SHEET 1 OF 1