## **DESCRIPTION:**

PFC model number CL16D42-300-CD-SFF is a Combline filter with SMA female connectors in and out. All filters will be machined and silver plated to provide the highest possible Q.

	REVISIONS											
ZONE	REV.	DESCRIPTION	DATE APPROVED									
	-	ORIGINAL RELEASE	6/20/00									

## **SPECIFICATIONS:**

• CENTER FREQUENCY: 16.42 GHz


• 3dB BANDWIDTH: 300 MHz


• VSWR IN THE PASS BAND: · 1.5:1 MAX.

 INSERTION LOSS (PASSBAND) <= -4 dB MAX.

• REJECTION FROM DC TO 16.12 GHz: -40 dB

• REJECTION FROM 16.72 TO 40 GHz: -40 dB

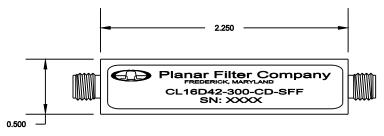




• CONNECTORS: SMA FEMALE CONNECTORS

SIZE · 2.25" (L) x 0.40" (W) x 0.50" (H)

• WEIGHT -· 1 OZ. TYP.

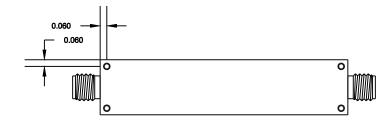

## **ENVIRONMENTAL RATINGS:**

ALTITUDE: -

-55°C TO +85°C (OPERATING) • TEMPERATURE:

-65°C TO +125°C (STORAGE)

• HUMIDITY: MIL-STD-202F, METHOD 103B COND. B

• SHOCK: MIL-STD-202F, METHOD 213B COND. B

VIBRATION: MIL-STD-202F, METHOD 204D COND. B MIL-STD-202F, METHOD 105C COND. B

SALT FOG: MIL-STD-202F, METHOD 107D COND. A

• FUNGUS: MIL-STD-810C, METHOD 508.2

 TEMPERATURE CYCLE: MIL-STD-202F, METHOD 107 TOLERANCES: X.XX ±0.010 X.XXX ±0.005

ALL DIMENSIONS ARE IN INCHES

PF60-23	Planar Filter Company 7311G Grove Road, Fredrick, Maryland									
APPROVALS	DATE	TITLE			touu,		<u> y</u>	_		
S. PALACIO	6/20/00	OUTLINE DRAWING CL 16D42-300-CD-SFF								
CHECKED		CL16D42-300-0					)—SF	Г		
ISSUED		SIZE	FSCM NO.		DWG NO.					REV.
		Α	1Q	JWO 155-0303				-		
		SCALE	N/A				SHEET	1	OF	1

NOTE: THE ABOVE SPECIFICATIONS ARE SUBJECT TO CHANGE OR REVISION