

## **DESCRIPTION:** PFC model number 5CL5086-100-CD-SS is a Combline filter with SMA female **SPECIFICATIONS:** • CENTER FREQUENCY:

REVISIONS APPROVED ZONE REV. DESCRIPTION DATE ORIGINAL RELEASE 6/19/00

connectors in and out. All filters will be machined and silver plated to provide the highest possible Q.

- 5086 MHz
- 3dB BANDWIDTH: 100 MHz
- VSWR IN THE PASS BAND: 1.5:1 MAX.
- INSERTION LOSS (PASSBAND) <= 1.8 dB MAX.
- REJECTION FROM DC TO 2550 MHz: -65 dB
- REJECTION FROM 7578 TO 20000 MHz: -65 dB

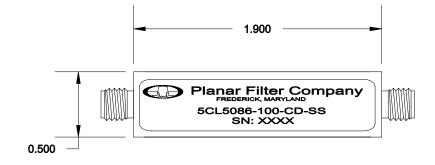



- CONNECTORS: **SMA FEMALE CONNECTORS**
- SIZE 1.90" (L) x 0.50" (W) x 0.50" (H)
- 1 OZ. TYP. WEIGHT



## **ENVIRONMENTAL RATINGS:**

- TEMPERATURE: -55°C TO +85°C (OPERATING) -65°C TO +125°C (STORAGE)
- HUMIDITY: MIL-STD-202F, METHOD 103B COND. B
- SHOCK: MIL-STD-202F, METHOD 213B COND. B
- VIBRATION: MIL-STD-202F, METHOD 204D COND. B
- ALTITUDE: MIL-STD-202F, METHOD 105C COND. B MIL-STD-202F, METHOD 107D COND. A SALT FOG:
- FUNGUS: MIL-STD-810C, METHOD 508.2
- TEMPERATURE CYCLE: MIL-STD-202F, METHOD 107

ALL DIMENSIONS ARE IN INCHES TOLERANCES: X.XX ±0.010 X.XXX ±0.005

PART NO. PF60-172			Planar Filter Company 7311G Grove Road, Fredrick, Maryland						
APPROVALS	DATE	TITLE		5.010	rtoda, i rodriot,	mai yiaria			
S. PALACIO	6/19/00	OUTLINE DRAWING 5CL5086-100-CD-SS							
CHECKED									
ISSUED		SIZE	FSCM NO.		DWG NO.		RE	EV.	
		Α	1Q	1QJW0   155-0			-	_	
		SCALE N/A				SHEET 1 (	DF 1		

NOTE: THE ABOVE SPECIFICATIONS ARE SUBJECT TO CHANGE OR REVISION