

## DESCRIPTION

LOW NOISE AMPLIFIER DESIGNED FOR MILITARY AND INDUSTRIAL APPLICATIONS. THIS AMPLIFIER IS SUPPLIED IN OUR STANDARD PE2 HOUSING THAT CAN BE USED AS AN SMA CONNECTORIZED OR A SURFACE MOUNT COMPONENT. OTHER PACKAGES AND CONNECTOR TYPES ARE AVAILABLE. THIS MODEL PROVIDES THE FOLLOWING PERFORMANCE. DATA IS AVAILABLE UPON REQUEST.

## SPECIFICATIONS

- FREQUENCY RANGE: \_\_\_\_\_ 0.25 to 10.0 GHZ
- GAIN: \_\_\_\_\_ 15 dB TYPICAL
- GAIN FLATNESS: \_\_\_\_\_ ±1.0 dB MAXIMUM
- NOISE FIGURE: \_\_\_\_\_ 4.5 dB TYPICAL
- OP1dB: \_\_\_\_\_ 13 dBm MINIMUM
- VSWR (IN/OUT): \_\_\_\_\_ 2.0:1 MAXIMUM
- CONNECTORS: \_\_\_\_\_ SMA (F) REMOVABLE
- DC SUPPLY: \_\_\_\_\_ +12 TO +15VDC @ 65mA MAXIMUM
- SIZE \_\_\_\_\_ (L) 1.08" X (W) 0.71" X (H) 0.29"  
\*EXCLUDING CONNECTORS\*
- FINISH \_\_\_\_\_ GOLD PLATED

## FEATURES

- INTERNAL VOLTAGE REGULATION
- UNCONDITIONAL STABILITY
- STANDARD OPERATING TEMPERATURE  
-20 TO +70 DEG. C

## AVAILABLE OPTIONS

- VARIOUS PACKAGE TYPES
- VARIOUS CONNECTOR TYPES
- TEMPERATURE COMPENSATION
- HERMETIC SEALING
- GAIN AND PHASE MATCHING
- MIL-STD-883 SCREENING AVAILABLE

## ENVIRONMENTAL RATINGS


- TEMPERATURE: \_\_\_\_\_ -20°C TO + 70°C (OPERATING); -55 TO +85 DEG C AVAILABLE  
-65°C TO +125°C (STORAGE)
- HUMIDITY: \_\_\_\_\_ MIL-STD-202F, METHOD 103B COND. B
- SHOCK: \_\_\_\_\_ MIL-STD-202F, METHOD 213B COND. B
- ALTITUDE: \_\_\_\_\_ MIL-STD-202F, METHOD 105C COND. B
- TEMPERATURE CYCLE: \_\_\_\_\_ MIL-STD-202F, METHOD 107D COND. A

ALL DIMENSIONS ARE IN INCHES  
TOLERANCES:  
X.XX ±0.020  
X.XXX ±0.010

NOTE: SPECIFICATIONS WILL VARY OVER OPERATING TEMPERATURE  
NOTE: THE ABOVE SPECIFICATIONS ARE SUBJECT TO CHANGE OR REVISION

REVISIONS				
ZONE	REV.	DESCRIPTION	DATE	APPROVED
	-	ORIGINAL RELEASE	2/1/08	

## MECHANICAL OUTLINE

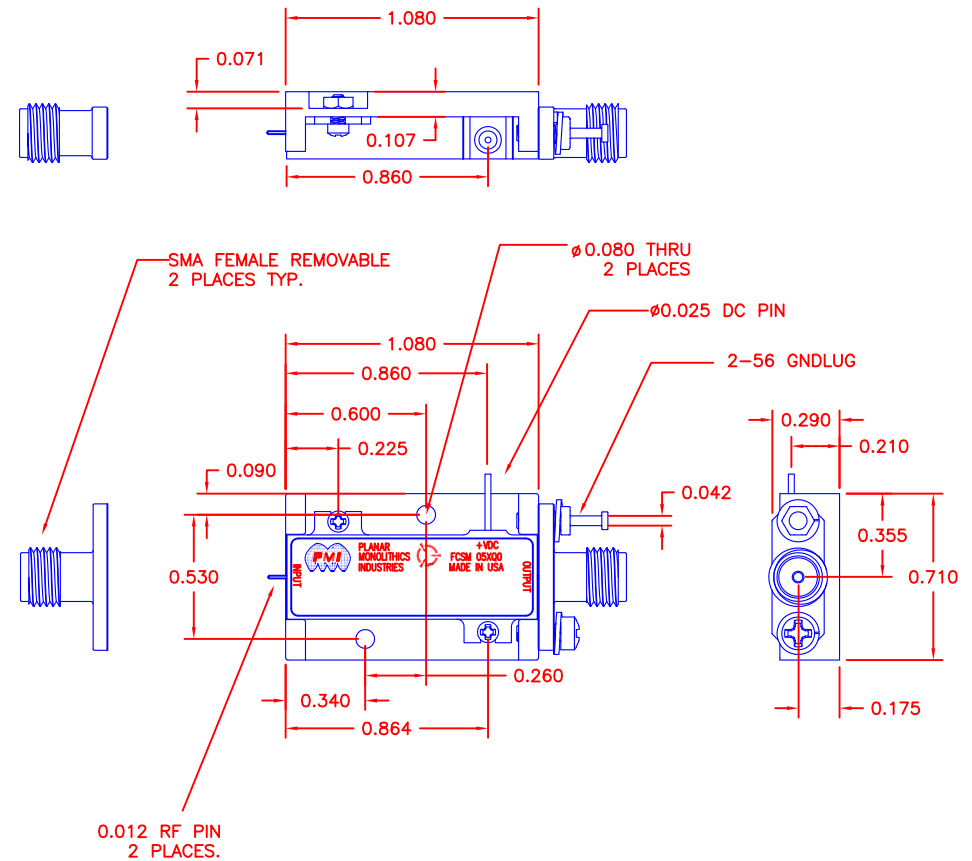

PMI CONFIDENTIAL AND PROPRIETARY

## PLANAR MONOLITHICS INDUSTRIES, INC.

7311-F GROVE ROAD  
FREDERICK, MARYLAND 21704 USA  
TEL: 301-662-5019 FAX: 301-662-1731  
WEBSITE: [www.pmi-rf.com](http://www.pmi-rf.com)  
E-MAIL: [sales@pmi-rf.com](mailto:sales@pmi-rf.com)  
ISO 9001 CERTIFIED



APPROVALS		DATE	TITLE			
DRAWN <i>K. Mason</i>		2/21/08	PRODUCT FEATURE			
CHECKED			PE2-15-OR2510R0-4R5-15-12-SFF			
ISSUED			SIZE	FCSM NO.	DWG NO.	REV.
			B	1LK53	WEB-MODEL	A
			SCALE	N/A		SHEET 1 OF 1