


DESCRIPTION

PMI MODEL TD-30T-SHS-218 OPTION: 30M450 IS A THRESHOLD DETECTOR DESIGNED FOR OPERATION BETWEEN THE 30 TO 450 MHz FREQUENCY RANGE, HAVING A VSWR INPUT OF 3.0:1 @ -20 dBm AND A DYNAMIC RANGE OF -20 dBm TO +10 dBm. THE SIZE IS 2.20" x 1.50" x 0.40".

REVISIONS			DATE	APPROVED
ZONE	REV.	DESCRIPTION		
	-	ORIGINAL RELEASE JOB# P402010	9/16/04	ESC

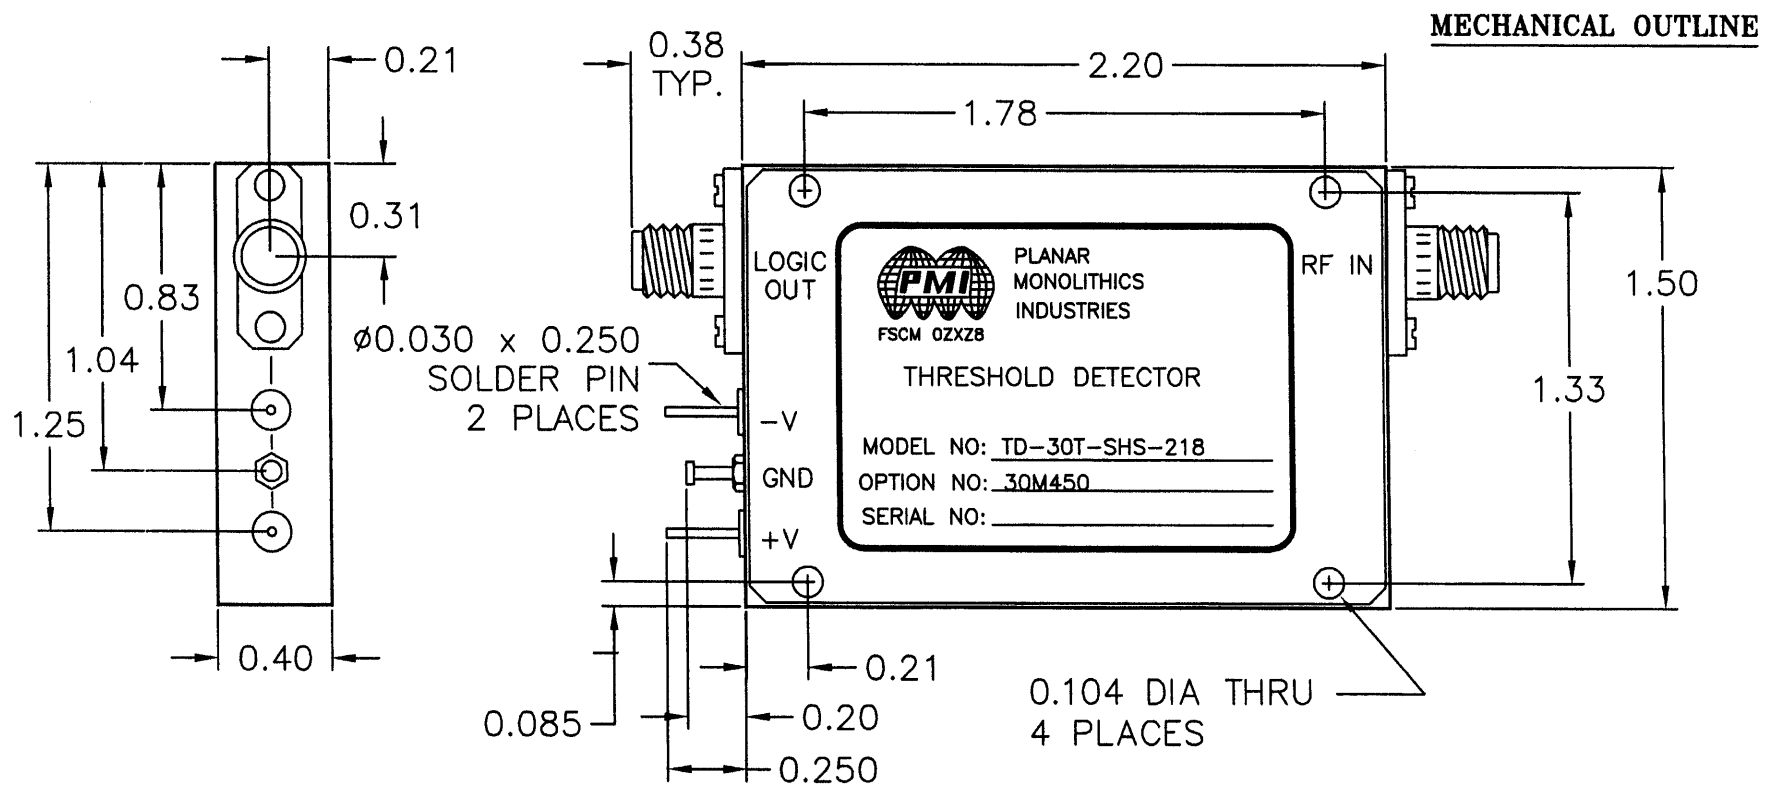

MECHANICAL OUTLINE

PLANAR MONOLITHICS INDUSTRIES, INC.
 7311-G GROVE ROAD
 FREDERICK, MARYLAND 21704 USA
 TEL: 301-631-1579 FAX: 301-662-2029
 WEBSITE: www.planarmonolithicsindustries.com
 E-MAIL: sales@planarmonolithics.com
 ISO 9001:2000 CERTIFIED



ALL DIMENSIONS ARE IN INCHES
 TOLERANCES:
 X.XX ±0.020
 X.XXX ±0.010

APPROVALS		DATE	TITLE			
DRAWN	gdf	9/16/04	MECHANICAL OUTLINE TD-30T-SHS-218 OPTION: 30M450 30 TO 450 MHz, THRESHOLD DETECTOR			
CHECKED	Ut	9/24/04	SIZE	FSCM NO.	DWG NO.	REV.
ISSUED			A	OZXZ8	100-7122	-
			SCALE	N:S		SHEET 2 OF 3