
## **DESCRIPTION:**


PFC model number 11CL19G-4G-CD-SFF is a Combline Bandpass filter with SMA female connectors in and out. All filters will be machined and silver plated to provide the highest possible Q.

REVISIONS											
ZONE	REV.	DESCRIPTION	DATE	APPROVED							
	_	ORIGINAL RELEASE	9/4/01								

## **SPECIFICATIONS:**

- CENTER FREQUENCY: 19000 MHz
- 1dB BANDWIDTH: 4000 MHz
- VSWR IN THE PASS BAND: 2.0:1 MAX.
- INSERTION LOSS (PASSBAND) < 1 dB MAX.
- REJECTION @ 10000 Mhz -50 dB
- -50 dB • REJECTION @ 15000 Mhz
- -50 dB REJECTION @ 18500 to 29000 Mhz

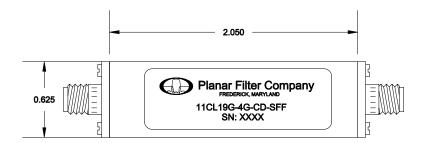



- CONNECTORS: **SMA FEMALE CONNECTORS**
- SIZE 2.05" (L) x 0.625" (W) x 0.40" (H)
- 0.070 0.070 1 OZ. TYP. WEIGHT 0.313

## **ENVIRONMENTAL RATINGS:**

- TEMPERATURE: -55°C TO +85°C (OPERATING) -65°C TO +125°C (STORAGE)
- HUMIDITY: MIL-STD-202F, METHOD 103B COND. B
- SHOCK: MIL-STD-202F, METHOD 213B COND. B
- VIBRATION: MIL-STD-202F, METHOD 204D COND. B
- ALTITUDE: MIL-STD-202F, METHOD 105C COND. B
- MIL-STD-202F, METHOD 107D COND. A SALT FOG:
- FUNGUS: MIL-STD-810C, METHOD 508.2
- TEMPERATURE CYCLE: MIL-STD-202F, METHOD 107

ALL DIMENSIONS ARE IN INCHES TOLERANCES: X.XX ±0.010 X.XXX ±0.005

	PART NO. 155-088	Planar Filter Company 7311G Grove Road, Fredrick, Maryland									
	APPROVALS	DATE	TITLE		,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,	toda, i i	ourion, ivi	ai yiai i			
	S PALACIO	9/4/01	OUTLINE DRAWIN 11CL 19G-4G-CD-						-		
	CHECKED			TICL	.196–	46-60	— SFF				
ı	ISSUED		SIZE	FSCM NO.		DWG NO.					RE
ı			A 1QJW0		JWO		155 - 0	882			-
			SCALE	N/A				SHEET	1	OF	1

NOTE: THE ABOVE SPECIFICATIONS ARE SUBJECT TO CHANGE OR REVISION