

DESCRIPTION

PMI MODEL NO. APD-3-218-SFF-30W IS A 3-WAY POWER DIVIDER THAT OPERATES OVER THE FREQUENCY RANGE OF 2.0 TO 18.0 GHz. IT HAS A MAXIMUM INSERTION LOSS OF 1.6 dB (ABOVE 4.77 dB SPLIT) AND A MINIMUM ISOLATION OF 20 dB. THIS MODEL IS OUTFITTED WITH SMA FEMALE CONNECTORS.

SPECIFICATIONS

- FREQUENCY RANGE: ----- 2.0 TO 18.0 GHz
- INSERTION LOSS: ----- 1.6 dB MAX (ABOVE 4.77 dB SPLIT)
- VSWR INPUT/OUTPUT: ----- 1.65:1 MAX
- ISOLATION: ----- 20 dB MIN
- AMPLITUDE BALANCE: ----- ±0.7 dB MAX
- PHASE BALANCE: ----- ±9° MAX
- POWER HANDLING: ----- FORWARD: 30 WATTS MAX
REVERSED: 1 WATT MAX
- IMPEDANCE: ----- 50 OHMS
- CONNECTORS: ----- SMA FEMALE
- FINISH: ----- PAINTED BLUE

ENVIRONMENTAL RATINGS

- TEMPERATURE: ----- -55 °C TO +85 °C (OPERATING)
-65 °C TO +125 °C (STORAGE)
- HUMIDITY: ----- UP TO 95%, NON-CONDENSING (OPERATING)
- SHOCK: ----- MIL-STD-202, METHOD 213B COND. B
- VIBRATION: ----- MIL-STD-202, METHOD 204D COND. B
- ALTITUDE: ----- MIL-STD-202, METHOD 105C COND. B
- TEMPERATURE CYCLE: ----- MIL-STD-202, METHOD 107D COND. A

NOTE: SPECIFICATIONS WILL VARY OVER OPERATING TEMPERATURE


NOTE: THE ABOVE SPECIFICATIONS ARE SUBJECT TO CHANGE OR REVISION

PMI CONFIDENTIAL AND PROPRIETARY

ALL DIMENSIONS
ARE IN INCHES [mm]
TOLERANCES:
X,XX ±0.020
X,XXX ±0.010

REVISIONS				
ZONE	REV.	DESCRIPTION	DATE	APPROVED
	-	PRELIMINARY	5/8/2019	

MECHANICAL OUTLINE

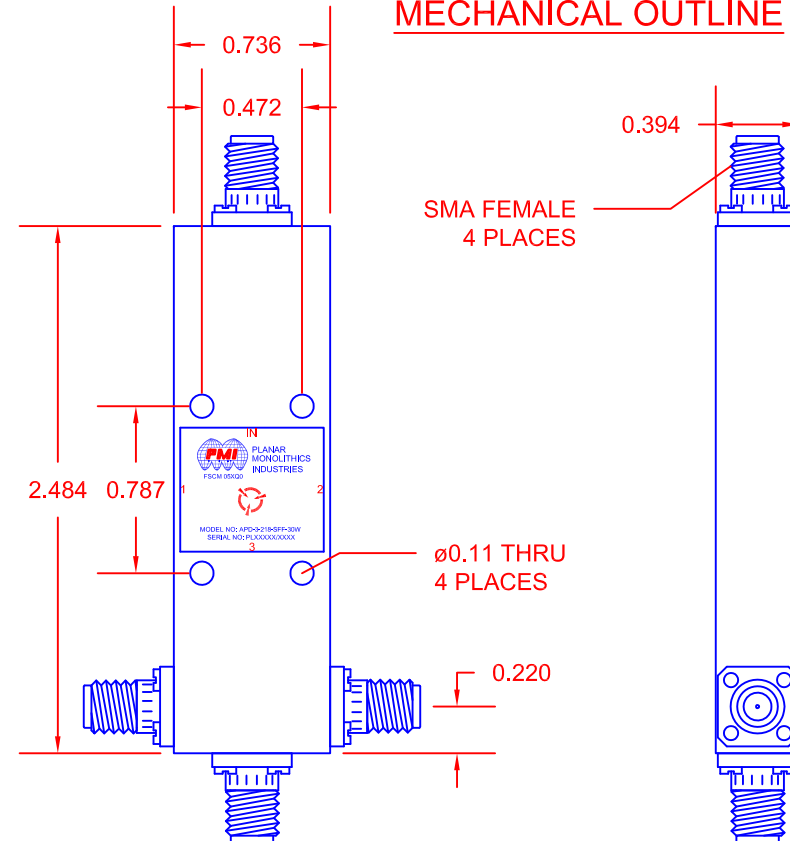

PLANAR MONOLITHICS INDUSTRIES, INC.

7311-F GROVE ROAD

FREDERICK, MARYLAND 21704 USA

TEL: (301)-662-5019, FAX: (301)-662-1731

WEB: www.pmi-rf.com, EMAIL: sales@pmi-rf.com

ISO 9001 CERTIFIED



APPROVALS		DATE	TITLE			REV.
DRAWN <i>EW</i>		5/8/19	PRODUCT FEATURE APD-3-218-SFF-30W			-
REDRAWN			SIZE A	FSCM NO. 05XQ0	DWG NO. PRELIMINARY	
ISSUED			SCALE N:S	SHEET 1 OF 1		