

**DESCRIPTION:**

PMI MODEL NUMBER P4T-2G18G-60-T-5-5-SFF IS A SINGLE POLE, FOUR THROW ABSORPTIVE SWITCH DESIGNED TO OPERATE OVER THE 2GHZ TO 18GHZ FREQUENCY RANGE. THIS MODEL IS DESIGNED TO MAINTAIN LOW INSERTION LOSS, HIGH ISOLATION, AND FAST SWITCHING SPEED.

**SPECIFICATIONS:**

- FREQUENCY: 2.0 GHz TO 18.0 GHz
- INSERTION LOSS: 3.8dB TYPICAL
- ISOLATION: 60dB MINIMUM
- VSWR: 2.0:1
- SPEED: 50ns MAXIMUM
- POWER INPUT: 100 mW CW MAXIMUM
- CONTROL: TTL LOGIC - SEE LOGIC TABLE
- POWER SUPPLY: +5V @ 200 mA NOMINAL  
-5V @ 75 mA NOMINAL
- RF CONNECTORS: SMA FEMALE CONNECTORS
- POWER & CONTROL CONNECTORS: MICRO SUB-D 9 PIN - FEMALE MATING CONNECTOR SUPPLIED
- SIZE: 1.50" (W) X 2.72" (L) X 0.40" (H)
- FINISH: GOLD PLATED

PIN OUT TABLE	
Pin No.	Function
1	E1
2	E2
3	N/C
4	N/C
5	N/C
6	GND
7	+V
8	-V
9	GND



LOGIC TABLE		
2 BIT DECODER		
E1	E2	FUNCTION
0	0	J1-J2 "Low Loss"
0	1	J1-J3 "Low Loss"
1	0	J1-J4 "Low Loss"
1	1	J1-J5 "Low Loss"

**ENVIRONMENTAL RATINGS:**

- TEMPERATURE: -55°C TO +85°C (OPERATING)  
-65°C TO +125°C (STORAGE)
- HUMIDITY: MIL-STD-202F, METHOD 103B COND. B
- SHOCK: MIL-STD-202F, METHOD 213B COND. B
- VIBRATION: MIL-STD-202F, METHOD 204D COND. B
- ALTITUDE: MIL-STD-202F, METHOD 105C COND. B
- TEMPERATURE CYCLE: MIL-STD-202F, METHOD 107

NOTE: THE ABOVE SPECIFICATIONS ARE SUBJECT TO CHANGE OR REVISION

REVISIONS				
ZONE	REV.	DESCRIPTION	DATE	APPROVED
	1	ORIGINAL RELEASE	05/28/13	
	A1	ECN # 13-0106	08/01/13	

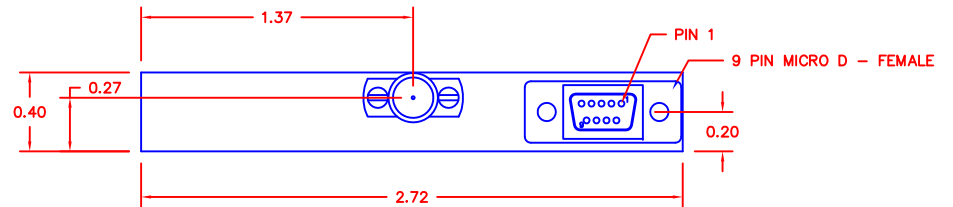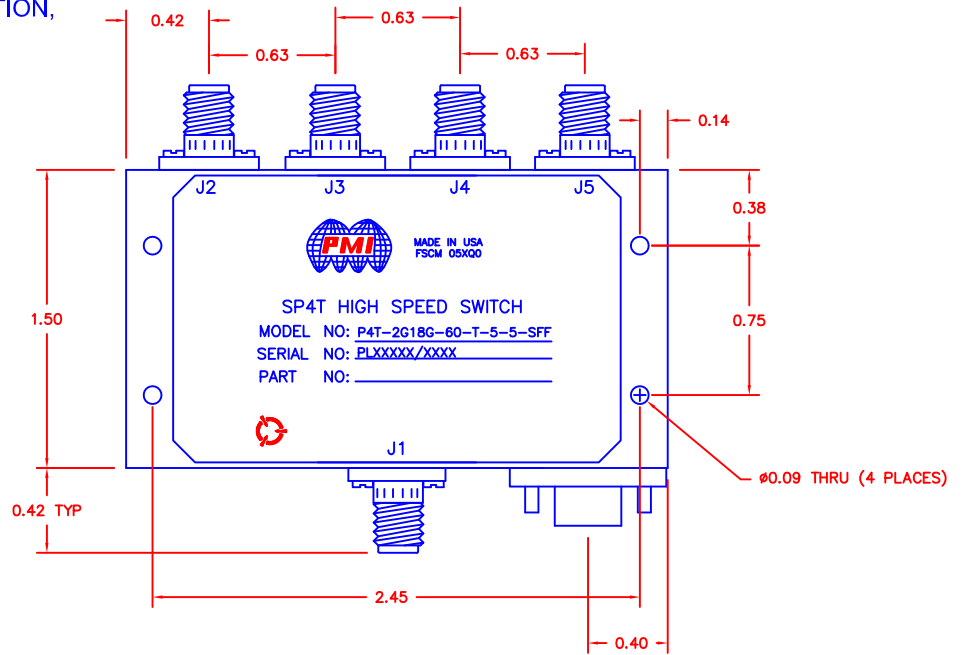

PMI CONFIDENTIAL AND PROPRIETARY

**PLANAR MONOLITHICS INDUSTRIES, INC.**

7311-F GROVE ROAD  
 FREDERICK, MARYLAND 21704 USA  
 TEL: 301-662-5019 FAX: 301-662-1731  
 WEBSITE: [www.pmi-rf.com](http://www.pmi-rf.com)  
 E-MAIL: [sales@pmi-rf.com](mailto:sales@pmi-rf.com)  
 ISO 9001:2008 CERTIFIED



APPROVALS		DATE	TITLE			
DRAWN <i>JCM</i>		11/12/12	PRODUCT FEATURE			
CHECKED			P4T-2G18G-60-T-5-5-SFF			
ISSUED			SIZE	FSCM NO.	DWG NO.	REV.
			A	05XQ0	27019483	A1
			SCALE	N:S		SHEET 1 OF 1

ALL DIMENSIONS ARE IN INCHES  
 TOLERANCES:  
 X.XX ±0.020  
 X.XXX ±0.010