

**DESCRIPTION:**

PMI MODEL NUMBER P24T-0R5G18G-60-T-SFF-OPT26 IS A SINGLE POLE, TWENTY-FOUR THROW ABSORBTIVE SWITCH DESIGNED TO OPERATE OVER THE 2.0 TO 6.0 GHZ FREQUENCY RANGE. THIS MODEL IS DESIGNED TO MAINTAIN LOW INSERTION LOSS, HIGH ISOLATION, AND FAST SWITCHING SPEED.

**SPECIFICATIONS:**

- FREQUENCY: 2.0 to 6.0 GHz
- INSERTION LOSS: 5dB MAX.
- ISOLATION: 90dB MINIMUM
- VSWR: 2.0:1 MAX.
- SPEED: 100ns MAXIMUM
- POWER INPUT: +20dBm CW MAXIMUM
- CONTROL: 5 BIT - TTL LOGIC - SEE LOGIC TABLE
- POWER SUPPLY: +5V @ 1200mA NOMINAL  
-5V @ 100mA NOMINAL
- CONNECTORS: SMA FEMALE CONNECTORS
- CONNECTORS: MICRO SUB-D 9 PIN (MDM-9PH003P OR EQUIV)  
MATING CONNECTOR SUPPLIED

PIN OUT TABLE	
Pin No.	Function
1	E1
2	E2
3	E3
4	E4
5	E5
6	GND
7	+V
8	-V
9	GND

LOGIC TABLE					
5 BIT DECODER					
E1	E2	E3	E4	E5	FUNCTION
0	0	0	0	0	J1-J2 "Low Loss"
0	0	0	0	1	J1-J3 "Low Loss"
0	0	0	1	0	J1-J4 "Low Loss"
0	0	0	1	1	J1-J5 "Low Loss"
0	0	1	0	0	J1-J6 "Low Loss"
0	0	1	0	1	J1-J7 "Low Loss"
0	0	1	1	1	J1-J8 "Low Loss"
0	1	0	0	0	J1-J9 "Low Loss"
0	1	0	0	1	J1-J10 "Low Loss"
0	1	0	1	0	J1-J11 "Low Loss"
0	1	0	1	1	J1-J12 "Low Loss"
0	1	1	0	0	J1-J13 "Low Loss"

LOGIC TABLE - CONT					
5 BIT DECODER					
E1	E2	E3	E4	E5	FUNCTION
0	1	1	0	1	J1-J14 "Low Loss"
0	1	1	1	0	J1-J15 "Low Loss"
0	1	1	1	1	J1-J16 "Low Loss"
1	0	0	0	0	J1-J17 "Low Loss"
1	0	0	0	1	J1-J18 "Low Loss"
1	0	0	1	0	J1-J19 "Low Loss"
1	0	0	1	1	J1-J20 "Low Loss"
1	0	1	0	0	J1-J21 "Low Loss"
1	0	1	0	1	J1-J22 "Low Loss"
1	0	1	1	0	J1-J23 "Low Loss"
1	0	1	1	1	J1-J24 "Low Loss"
1	1	0	0	0	J1-J25 "Low Loss"


**ENVIRONMENTAL RATINGS:**

- TEMPERATURE: -55°C TO +95°C (OPERATING)  
-65°C TO +125°C (STORAGE)
- HUMIDITY: MIL-STD-202F, METHOD 103B COND. B
- SHOCK: MIL-STD-202F, METHOD 213B COND. B
- VIBRATION: MIL-STD-202F, METHOD 204D COND. B
- ALTITUDE: MIL-STD-202F, METHOD 105C COND. B
- TEMPERATURE CYCLE: MIL-STD-202F, METHOD 107

NOTE: THE ABOVE SPECIFICATIONS ARE SUBJECT TO CHANGE OR REVISION

ALL DIMENSIONS ARE IN INCHES  
TOLERANCES:  
X.XX ±0.010  
X.XXX ±0.005

REVISIONS				
ZONE	REV.	DESCRIPTION	DATE	APPROVED
	-	PRELIMINARY	2/8/18	

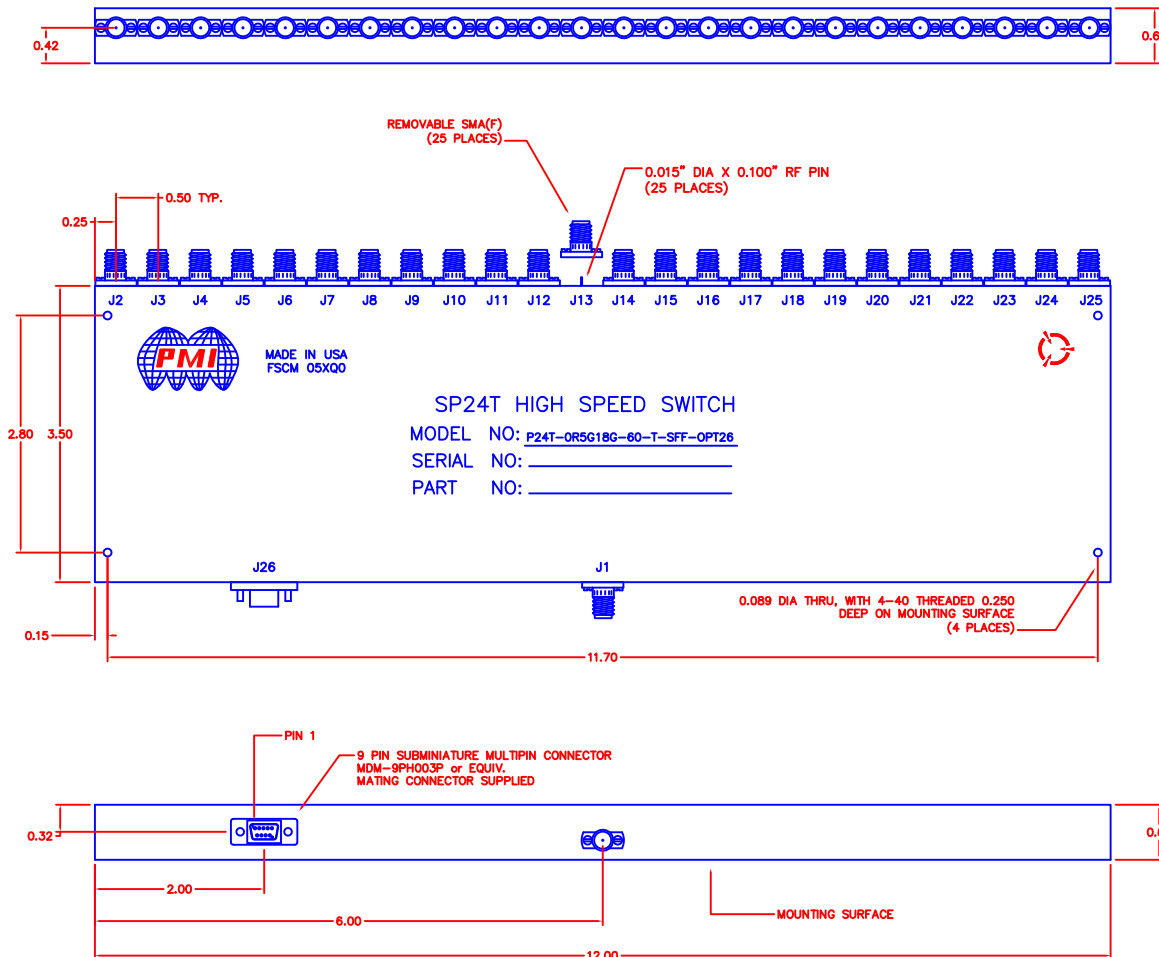

**PLANAR MONOLITHICS INDUSTRIES, INC.**  
7311-F GROVE ROAD  
FREDERICK, MARYLAND 21704 USA  
TEL: 301-662-5019 FAX: 301-662-1731  
WEBSITE: [www.pmi-rf.com](http://www.pmi-rf.com)  
E-MAIL: [sales@pmi-rf.com](mailto:sales@pmi-rf.com)  
ISO 9001:2008 CERTIFIED



APPROVALS		DATE	TITLE			
DRAWN <i>KM</i>		1/11/11	PRODUCT FEATURE			
REDRAWN <i>EW</i>		2/8/18	P24T-0R5G18G-60-T-SFF-OPT26			
ISSUED			SIZE A	FSCM NO. 05XQ0	DWG NO. PRELIMINARY	REV. -
SCALE N:S			SHEET 1 OF 1			