

DESCRIPTION

PMI MODEL NUMBER: P4T-500M6G-80-T-SFF IS A 500MHz TO 6GHz, SINGLE POLE, FOUR THROW, ABSORPTIVE SWITCH. THIS SWITCH OFFERS 80dB OF PORT TO PORT ISOLATION, AND A MAXIMUM INSERTION LOSS OF 3dB. IT HAS A SWITCHING SPEED OF 25ns AND IS INDEPENDENTLY TTL CONTROLLED. THE OPERATING POWER IS +20dBm CW AND THE TYPICAL VSWR IS 2:1 MAXIMUM.

SPECIFICATIONS

- FREQUENCY RANGE: 500MHz TO 6GHz
 - INSERTION LOSS: 3dB MAX
 - ISOLATION: 80dB MIN
 - VSWR: 2:1 MAX
 - SPEED: 50% TTL TO 10%/90% RF
25ns TYP
 - INPUT POWER: +20dBm CW
 - SURVIVAL POWER: +23dBm CW
 - CONTROL TTL: 4 LINE INDEPENDENT
LOGIC "0" = INSERTION LOSS
LOGIC "1" = ISOLATION
 - POWER SUPPLY: +12 VDC @ 100mA *
-12 VDC @ 125mA *
 - RF CONNECTORS: SMA FEMALE
 - CONTROL, POWER, AND GROUND: FEEDTHRU - Ø0.030 TYP
 - SIZE: (L) 2.0" X (W) 1.0" X (H) 0.4"
 - FINISH: GOLD PLATED
- * VOLTAGE REGULATION & REVERSE BIAS PROTECTION INCLUDED

ENVIRONMENTAL RATINGS


- TEMPERATURE: -40°C TO + 85°C (OPERATING)
-55°C TO +125°C (STORAGE)
- HUMIDITY: MIL-STD-202F, METHOD 103B COND. B
- SHOCK: MIL-STD-202F, METHOD 213B COND. B
- VIBRATION: MIL-STD-202F, METHOD 204D COND. B
- ALTITUDE: MIL-STD-202F, METHOD 105C COND. B
- TEMPERATURE CYCLE: MIL-STD-202F, METHOD 107D COND. A

NOTE: SPECIFICATIONS WILL VARY OVER OPERATING TEMPERATURE
NOTE: THE ABOVE SPECIFICATIONS ARE SUBJECT TO CHANGE OR REVISION

ALL DIMENSIONS ARE IN INCHES
TOLERANCES:
X.XX ±0.020
X.XXX ±0.010

REVISIONS				
ZONE	REV.	DESCRIPTION	DATE	APPROVED
	1	PRELIMINARY	6/17/14	

MECHANICAL OUTLINE

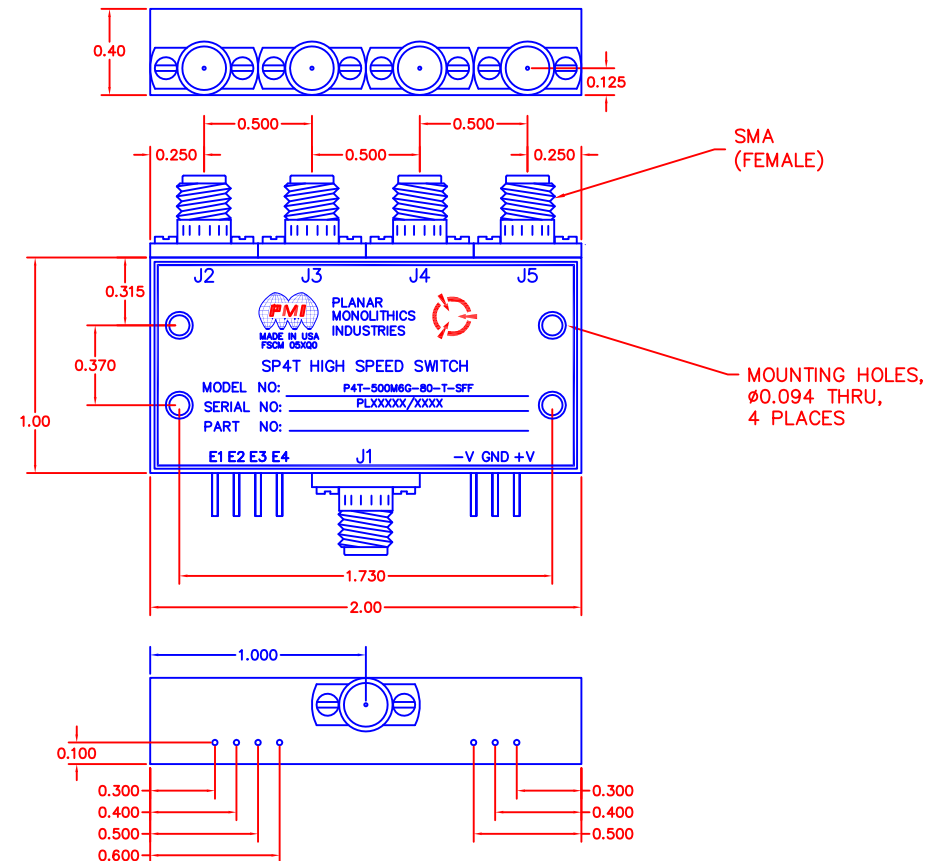

PMI CONFIDENTIAL AND PROPRIETARY

PLANAR MONOLITHICS INDUSTRIES, INC.

7311-F GROVE ROAD
FREDERICK, MARYLAND 21704 USA
TEL: 301-662-5019 FAX: 301-662-1731
WEBSITE: www.pmi-rf.com
E-MAIL: sales@pmi-rf.com
ISO 9001:2000 CERTIFIED



APPROVALS		DATE	TITLE			
DRAWN <i>DPD</i>		6/17/14	PRODUCT FEATURE P4T-500M6G-80-T-SFF			
CHECKED			SIZE	FSCM NO.	DWG NO.	REV.
			A	05XQ0	PRELIMINARY	1
ISSUED			SCALE	N: S		SHEET 1 OF 1