

DESCRIPTION

PMI MODEL LNA-26-3D5G6G-3R0-25 OPERATES AT FREQUENCY RANGE OF 3.5-6.0GHz.

SPECIFICATIONS

- FREQUENCY RANGE:.....3.5 TO 6.0 GHz
- OP1dB:+25dBm MIN
- OUTPUT IP3:.....+35dBm MIN
- MAX INPUT:+20dBm
- GAIN @25°C BASE PLATE TEMPERATURE:.....26dB ± 0.5dB, ± 2.0 OVER TEMP
- NOISE FIGURE:.....3.0dB MAX @ 25°C, 5.0dB OVER TEMP
- VSWR (INPUT/OUTPUT):.....2.0:1 MAX
- SPURIOUS:.....-60dBc MAX
- DC VOLTAGE:.....+12V TO +14V @ 550 mA MAX
- CONNECTORS IN/OUT:.....SMA FEMALE CONNECTORS
- SIZE:.....1.162"(L) X 0.750"(W) X 0.365"(H)
- FINISH:.....BLUE EPOXY PAINT

ENVIRONMENTAL RATINGS


- TEMPERATURE:.....-30°C TO +75°C (OPERATING)
-40°C TO +85°C (STORAGE)
- HUMIDITY:.....MIL-STD-810, METHOD 507, PROCEDURE II
- SHOCK:.....MIL-STD-810, METHOD 516 PROCEDURE 1
- ALTITUDE (OPERATING): MIL-STD-810, METHOD 500 PROCEDURE II
- ALTITUDE (STORAGE): MIL-STD-810, METHOD 500 PROCEDURE I
- VIBRATION.....MIL-STD-810, METHOD 514, PROCEDURE II
- EXPLOSIVE ATMOSPHERE: MIL-STD-810, METHOD 511.4 PROCEDURE I

NOTE: SPECIFICATIONS WILL VARY OVER OPERATING TEMPERATURE
NOTE: THE ABOVE SPECIFICATIONS ARE SUBJECT TO CHANGE OR REVISION

ALL DIMENSIONS ARE IN INCHES
TOLERANCES:
X.XX ±0.010
X.XXX ±0.005

REVISIONS				
ZONE	REV.	DESCRIPTION	DATE	APPROVED
	1	PRELIMINARY	8-8-18	

MECHANICAL OUTLINE

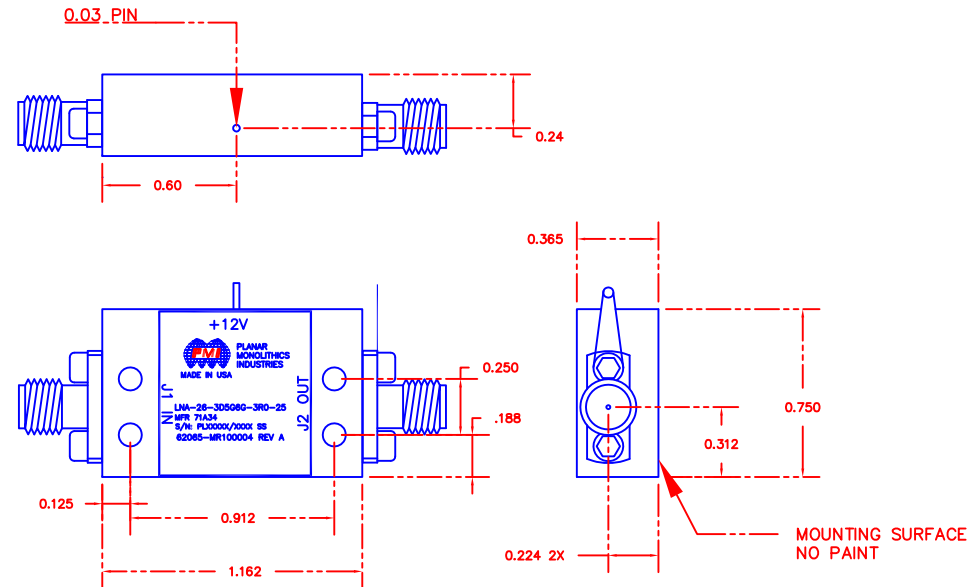

PMI CONFIDENTIAL AND PROPRIETARY

PLANAR MONOLITHICS INDUSTRIES, INC.

4921 ROBERT J. MATHEWS PKWY #1
EL DORADO HILLS, CA 95762
TEL: 916-542-1401 FAX: 916-265-2597
WEBSITE: www.pmi-rf.com
E-MAIL: sales@pmi-rf.com
ISO 9001 CERTIFIED



APPROVALS		DATE	TITLE			
DRAWN	JM	8-8-18	PRODUCT FEATURE LNA-26-3D5G6G-3R0-25			
CHECKED			SIZE	FSCM NO.	DWG NO.	REV.
ISSUED			A	71A34	PRELIMINARY	1
			SCALE	N: S		SHEET 1 OF 1