

DESCRIPTION

THE MODEL: P8T-0R5G18G-60-T-SFF-OPT50M4G-BR IS A HIGH SPEED, SINGLE POLE, EIGHT THROW, ABSORPTIVE SWITCH CAPABLE OF SWITCHING WITHIN 100ns. THE FREQUENCY RANGE IS 0.05 TO 4.0 GHz AND THIS SWITCH HAS OVER 60dB OF ISOLATION.

SPECIFICATIONS


- FREQUENCY RANGE: 0.05 TO 4.0 GHz
- ISOLATION 60dB MIN
- INSERTION LOSS 2.25dB MAX
- VSWR IN/OUT 2.0:1 MAX
- OPERATING INPUT POWER +30dBm CW
- SWITCHING SPEED 100 ns TYP
- DC VOLTAGE AND CURRENT +5VDC @ 400mA TYP
-5VDC @ 200mA TYP
- CONTROL SIGNAL EIGHT LINE TTL
 - E1 CONTROLS J1-J2
 - E2 CONTROLS J1-J3
 - E3 CONTROLS J1-J4
 - E4 CONTROLS J1-J5
 - E5 CONTROLS J1-J6
 - E6 CONTROLS J1-J7
 - E7 CONTROLS J1-J8
 - E8 CONTROLS J1-J9
 - "0" ISOLATION
 - "1" INSERTION LOSS
- CONNECTORS SMA (F)
- FINISH GOLD PLATED
- SIZE 4.0" X 1.5" X 0.4"

ENVIRONMENTAL RATINGS

- TEMPERATURE: -55°C TO +85°C (OPERATING)
-65°C TO +125°C (STORAGE)
- HUMIDITY: MIL-STD-202F, METHOD 103B COND. B
- SHOCK: MIL-STD-202F, METHOD 213B COND. B
- VIBRATION: MIL-STD-202F, METHOD 204D COND. B
- ALTITUDE: MIL-STD-202F, METHOD 105C COND. B
- TEMPERATURE CYCLE: MIL-STD-202F, METHOD 107D COND. A

NOTE: SPECIFICATIONS WILL VARY OVER OPERATING TEMPERATURE
NOTE: THE ABOVE SPECIFICATIONS ARE SUBJECT TO CHANGE OR REVISION

REVISIONS				
ZONE	REV.	DESCRIPTION	DATE	APPROVED
	A1	ORIGINAL RELEASE	07/12/17	

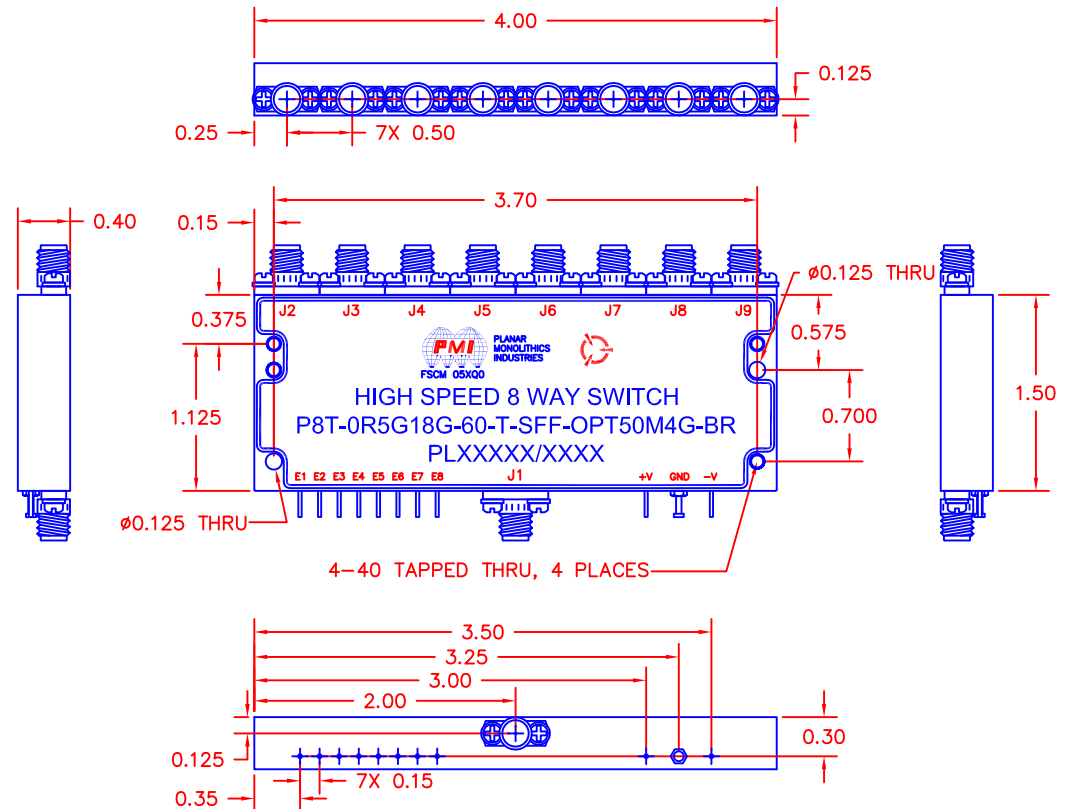

ALL DIMENSIONS ARE IN INCHES
TOLERANCES:
X.XX ±0.020
X.XXX ±0.010

PLANAR MONOLITHICS INDUSTRIES, INC.

7311-F GROVE ROAD
FREDERICK, MARYLAND 21704 USA
TEL: 301-662-5019 FAX: 301-662-1731
WEBSITE: www.pmi-rf.com
E-MAIL: sales@pmi-rf.com
ISO 9001 CERTIFIED



APPROVALS		DATE	TITLE			
DRAWN <i>sfk</i>		02/19/11	PRODUCT FEATURE			
REDRAWN <i>SPU</i>		08/01/17	P8T-0R5G18G-60-T-SFF-OPT50M4G-BR			
ISSUED	SIZE A	FSCM NO. 05XQ0	DWG NO. 27033040	REV. A1		
SCALE N:S			SHEET 1 OF 1			