

DESCRIPTION

PMI MODEL: SDLVA-6G18G-70 IS A SUCCESSIVE DETECTION LOG VIDEO AMPLIFIER OPERATING IN THE 6 GHz TO 18 GHz FREQUENCY BAND. IT FEATURES A BUILT IN VOLTAGE VARIABLE THRESHOLD DETECTOR CIRCUIT THAT IS SETUP TO MATCH THE VIDEO OUTPUT VOLTAGE TO WITHIN 5%. IN ADDITION, THIS MODEL HAS A TSS OF -70 dBm AND A DYNAMIC RANGE OF 70 dB, ALL IN A PACKAGE MEASURING ONLY 2.3" X 2.2" X 0.4"

SPECIFICATIONS

- FREQUENCY: ----- 6 GHz to 18.0 GHz
- FREQUENCY FLATNESS: ----- ± 2.0 dB MAX
- TSS: ----- -70 dBm TYP
- VSWR: ----- 2.0:1 MAX
- VIDEO COMPARATOR OUTPUT (V0): ----- 5 V INTO 1 M Ω , 2.5 V INTO 50 Ω (TYP)
- VIDEO COMPARATOR THRESHOLD LEVEL: ----- ADJUSTABLE
-60 dBm to 0 dBm (OPERATING RANGE)
THRESHOLD LEVEL =
V1 $\pm 5\%$ and ± 25 mV (HYSTERESIS)
- LOG RANGE: ----- -70 dBm to 0 dBm MIN
- LOG SLOPE: ----- 25 mV/dB ($\pm 5\%$) @ 50 Ω LOAD
- LOG LINEARITY: ----- ± 1.75 dB (-65 TO 0 dBm) MAX
- PULSE RANGE: ----- 100 ns to DC
- RISE TIME: ----- 30 ns MAX
- RECOVERY TIME: ----- 300 ns MAX
- POWER SUPPLY: ----- +12 to +15 VDC @ 400 mA
-12 to -15 VDC @ 200 mA
- CONNECTORS: ----- SMA FEMALE
- SIZE: ----- 2.30" X 2.20" X 0.40"
- FINISH: ----- GOLD PLATED

ENVIRONMENTAL RATINGS

- TEMPERATURE: ----- -40 $^{\circ}$ C TO +85 $^{\circ}$ C (OPERATING)
-54 $^{\circ}$ C TO +100 $^{\circ}$ C (STORAGE)
- HUMIDITY: ----- MIL-STD-202, METHOD 103B COND. B
- SHOCK: ----- MIL-STD-202, METHOD 213B COND. B
- VIBRATION: ----- MIL-STD-202, METHOD 204D COND. B
- ALTITUDE: ----- MIL-STD-202, METHOD 105C COND. B
- TEMPERATURE CYCLE: ----- MIL-STD-202, METHOD 107D COND. A


NOTE: SPECIFICATIONS WILL VARY OVER OPERATING TEMPERATURE
NOTE: THE ABOVE SPECIFICATIONS ARE SUBJECT TO CHANGE OR REVISION

PMI CONFIDENTIAL AND PROPRIETARY

ALL DIMENSIONS
ARE IN INCHES
TOLERANCES:
X.XX ± 0.020
X.XXX ± 0.010

REVISIONS				
ZONE	REV.	DESCRIPTION	DATE	APPROVED
	1	PRELIMINARY	12-22-16	

MECHANICAL OUTLINE

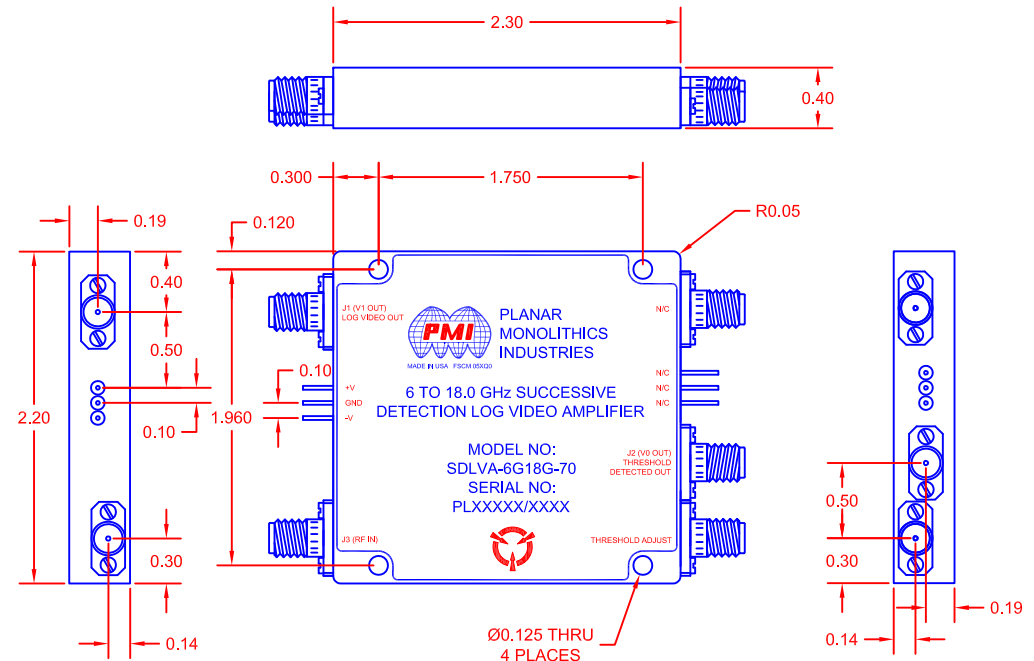


PLANAR MONOLITHICS INDUSTRIES, INC.
7311-F GROVE ROAD
FREDERICK, MARYLAND 21704 USA
TEL: (301)-662-5019, FAX: (301)-662-1731
WEB: www.pmi-rf.com, EMAIL: sales@pmi-rf.com
ISO 9001 CERTIFIED



APPROVALS		DATE	TITLE			
DRAWN <i>JOHN M</i>		12-22-16	PRODUCT FEATURE SDLVA-6G18G-70 6 - 18 GHz Successive Detection Log Video Amplifier			
CHECKED			SIZE	FSCM NO.	DWG NO.	REV.
ISSUED			A	71A34	PRELIMINARY	1
			SCALE	N:S	SHEET	1 OF 2

REVISIONS				
ZONE	REV.	DESCRIPTION	DATE	APPROVED
	1	PRELIMINARY	12-22-16	

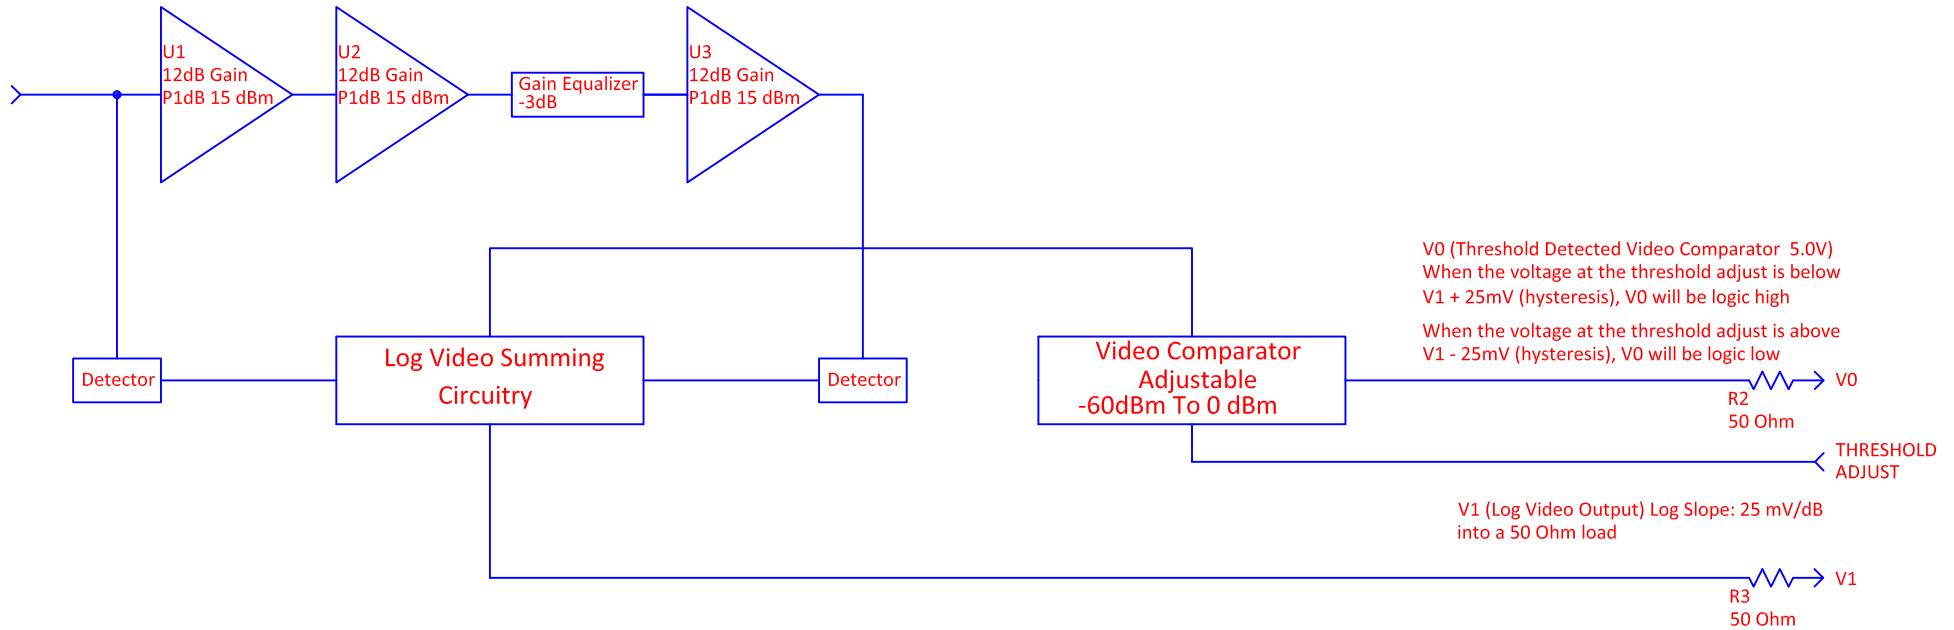

NOTE: SPECIFICATIONS WILL VARY OVER OPERATING TEMPERATURE
NOTE: THE ABOVE SPECIFICATIONS ARE SUBJECT TO CHANGE OR REVISION

PMI CONFIDENTIAL AND PROPRIETARY

PLANAR MONOLITHICS INDUSTRIES, INC.
7311-F GROVE ROAD
FREDERICK, MARYLAND 21704 USA
TEL: (301)-662-5019, FAX: (301)-662-1731
WEB: www.pmi-rf.com, EMAIL: sales@pmi-rf.com
ISO 9001 CERTIFIED



APPROVALS		DATE		TITLE			
DRAWN <i>JOHN M</i>		12-22-16		PRODUCT FEATURE SDLVA-6G18G-70			
CHECKED				6 - 18 GHz Successive Detection Log Video Amplifier			
ISSUED				SIZE	FSCM NO.	DWG NO.	REV.
				A	71A34	PRELIMINARY	1
				SCALE	N:S	SHEET	2 OF 2