

DESCRIPTION:

PLANAR MONOLITHICS INDUSTRIES MODEL NUMBER BPF-7400-2000-35-SFF-HY IS A BANDPASS FILTER. THE PASSBAND IS FROM 6400 TO 8400 MHz MINIMUM AND THE FILTER HAS THE FOLLOWING SPECIFICATIONS.

SPECIFICATIONS:

- PASSBAND FREQUENCY RANGE:..... 6400 TO 8400 MHz MINIMUM
- -3 dB BANDWIDTH:..... 2000 MHz MINIMUM
- -1 dB PASSBAND INSERTION LOSS:..... 5.5 dB MAXIMUM
- PASSBAND VSWR:..... 2.0:1 MAXIMUM OVER 90% OF PASSBAND
- REJECTION:..... -35 dBc MINIMUM 100 - 6000 MHz
-35 dBc MINIMUM 8800 - 12000 MHz



- CONNECTORS:..... SMA FEMALE (FIELD REPLACEABLE)
- SIZE:..... 1.42" X 0.80" X 0.40"
- FINISH:..... GOLD PLATED

ENVIRONMENTAL RATINGS:

- TEMPERATURE:..... -45°C TO +85°C (OPERATING)
-55°C TO +125°C (STORAGE)

NOTE: THE ABOVE SPECIFICATIONS ARE SUBJECT TO CHANGE OR REVISION. SPECIFICATIONS MAY VARY OVER TEMPERATURE

ZONE	REV.	DESCRIPTION	DATE	APPROVED
	A1	ORIGINAL RELEASE	8/6/2020	

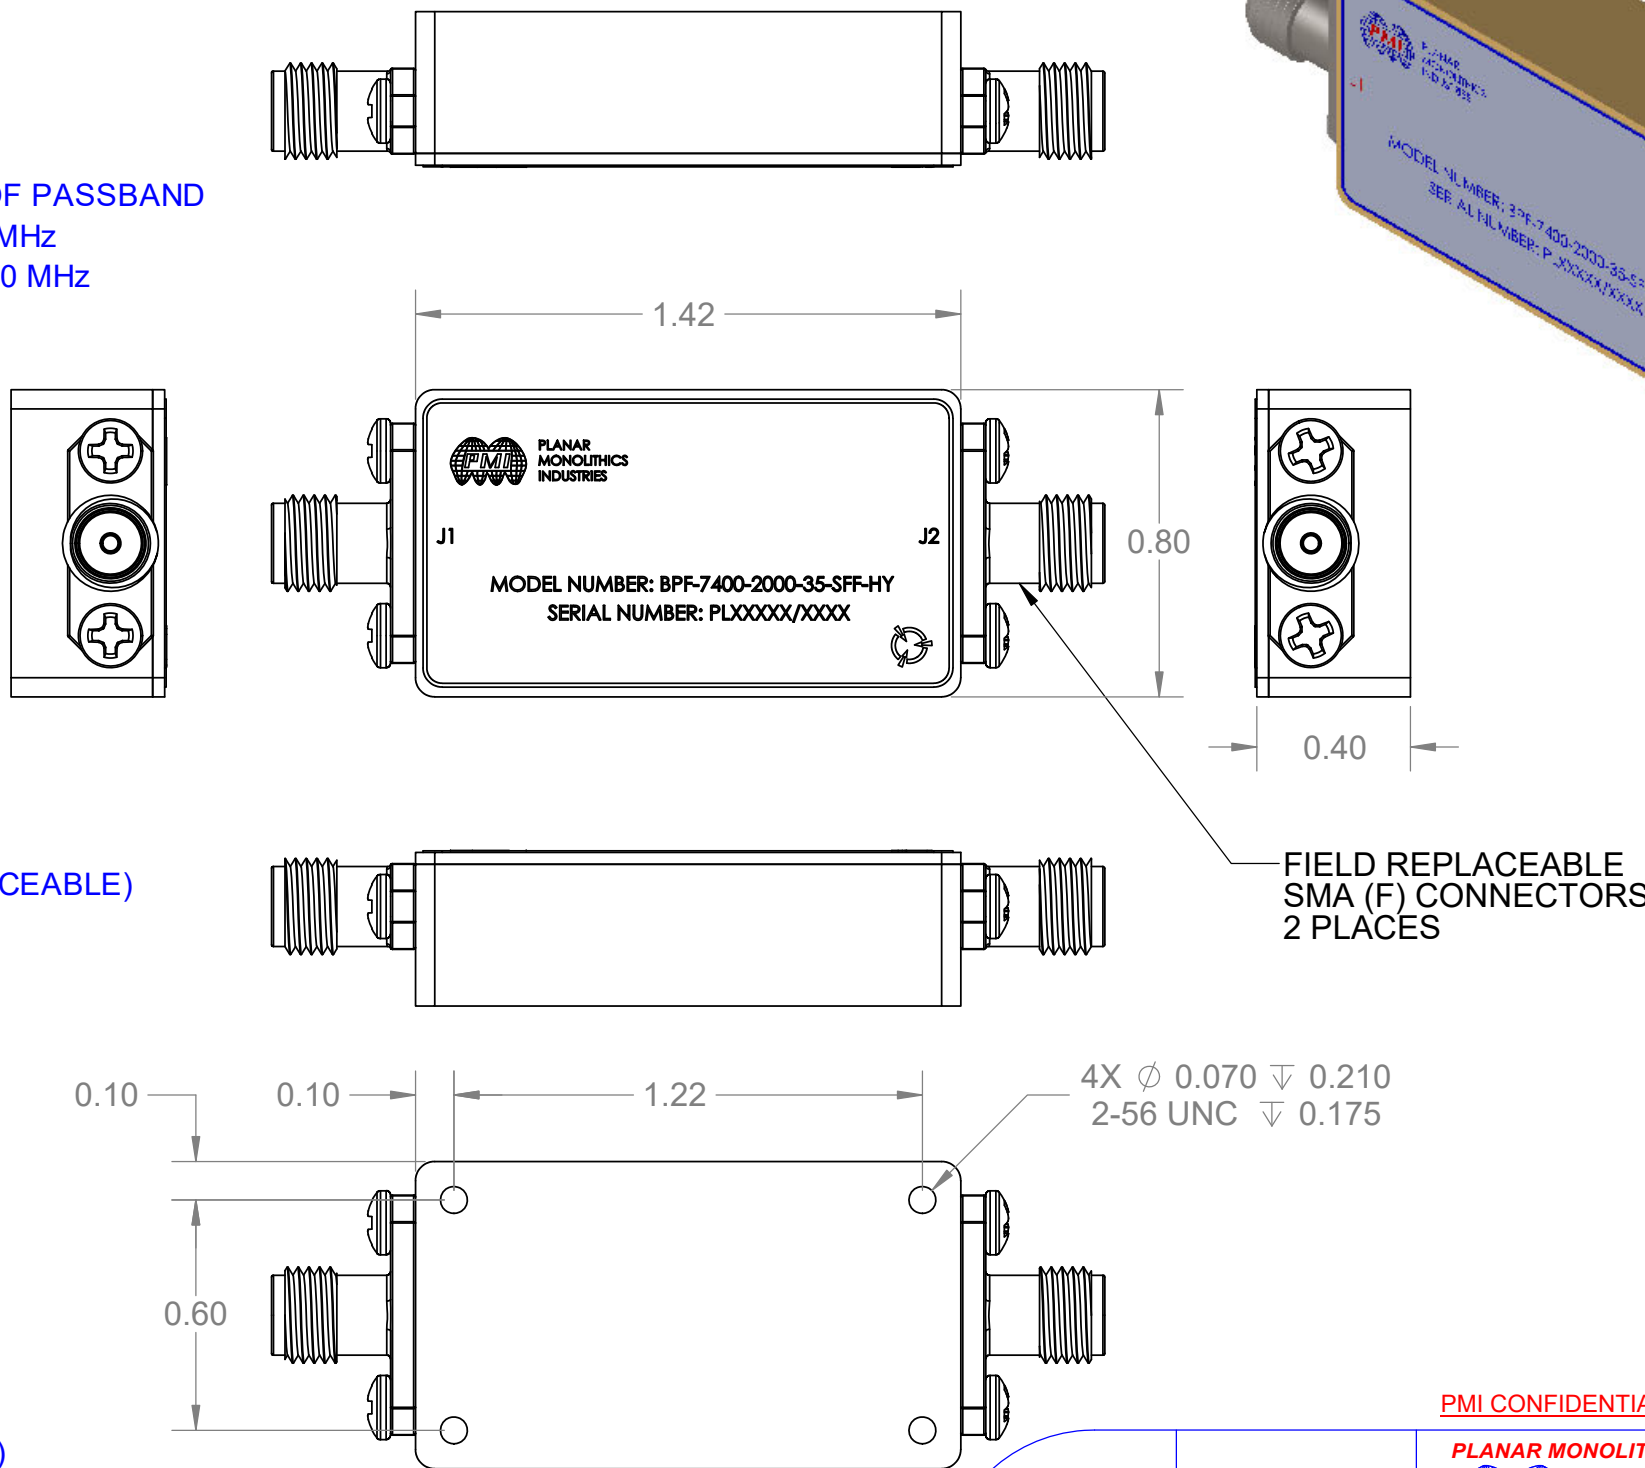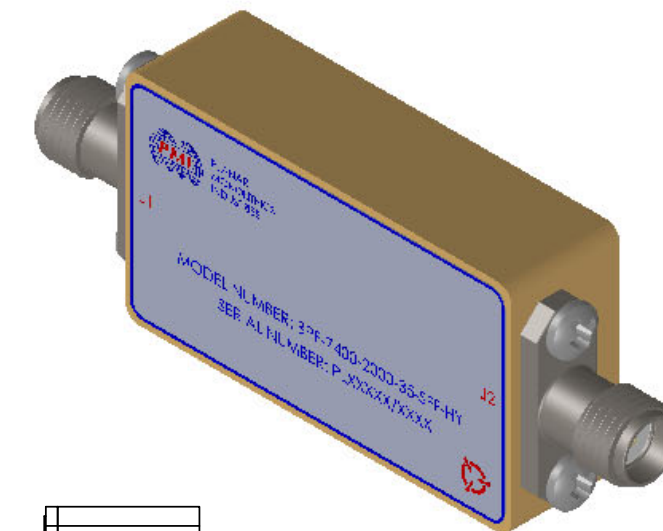

PMI CONFIDENTIAL AND PROPRIETARY

PLANAR MONOLITHICS INDUSTRIES, INC.
 7311-F GROVE ROAD
 FREDERICK, MARYLAND 21704 USA
 TEL: (301)-862-5019, FAX: (301)-662-1731
 WEB: www.pmi-rf.com, EMAIL: sales@pmi-rf.com
 ISO 9001 CERTIFIED

APPROVALS		DATE	TITLE		
DRAWN	D. DURBIN	8/6/2020	OUTLINE DRAWING		
REISSUED			BPF-7400-2000-35-SFF-HY		
ISSUED			SIZE	FSCM NO.	DWG NO.
			B	05XQ0	27039440
			SCALE	SHEET 1 OF 1	
			2:1		

UNLESS OTHERWISE SPECIFIED
 DIMENSIONS ARE IN INCHES
 TOLERANCES ARE:
 FRACTIONS DECIMALS ANGLES
 ± .XX ± 0.02 ±
 .XXX ± 0.01