

REVISIONS				
ZONE	REV.	DESCRIPTION	DATE	APPROVED
	1	ORIGINAL RELEASE	12/17/15	

DESCRIPTION

PMI MODEL P3T-10M1G-60-T-SFF IS AN ABSORPTIVE, HIGH SPEED, SINGLE POLE THREE THROW SWITCH CAPABLE OF SWITCHING WITHIN 200 ns MAXIMUM. THE FREQUENCY RANGE IS 0.010 GHz TO 1.0 GHz. THIS SWITCH HAS > 60 dB ISOLATION.

SPECIFICATIONS

- FREQUENCY RANGE: 0.010 GHz TO 1.0 GHz
- IMPEDANCE: 50 Ω
- INPUT POWER: +30dBm MAX (SURVIVAL)
+20dBm MAX (OPERATING)
- VSWR: 1.5:1 TYP
- INSERTION LOSS: 1.4dB MAX
- ISOLATION: 60dB MIN
- SWITCHING SPEED: 200ns MAX
- DC VOLTAGE: +5VDC, 150mA TYP.
-15VDC, 100mA TYP.
- CONTROL: SOLDER PIN
TTL COMPATIBLE - SEE LOGIC TABLE
- CONNECTORS IN/OUT: SMA (F)
- SIZE: (L) 1.5" X (W) 1.5" X (H) 0.4"
- FINISH: BLUE EPOXY POLIMIDE COATING IAW MIL-C-22750, TYPE I OVER EPOXY POLIMIDE PRIMER IAW MIL-P-23377, TYPE I, CLASS 1 OR 3.

LOGIC TABLE			
E1	E2	E3	FUNCTION
0	1	1	J1-J2 "LOW LOSS"
1	0	1	J1-J3 "LOW LOSS"
1	1	0	J1-J4 "LOW LOSS"


ENVIRONMENTAL RATINGS

- TEMPERATURE: -55°C TO + 85°C (OPERATING)
-65°C TO +125°C (STORAGE)
- HUMIDITY: MIL-STD-202F, METHOD 103B COND. B
- SHOCK: MIL-STD-202F, METHOD 213B COND. B
- VIBRATION: MIL-STD-202F, METHOD 204D COND. B
- ALTITUDE: MIL-STD-202F, METHOD 105C COND. B
- TEMPERATURE CYCLE: MIL-STD-202F, METHOD 107D COND. A

NOTE: SPECIFICATIONS WILL VARY OVER OPERATING TEMPERATURE
NOTE: THE ABOVE SPECIFICATIONS ARE SUBJECT TO CHANGE OR REVISION

ALL DIMENSIONS ARE IN INCHES
TOLERANCES:
X.XX \pm 0.020
X.XXX \pm 0.010

MECHANICAL OUTLINE

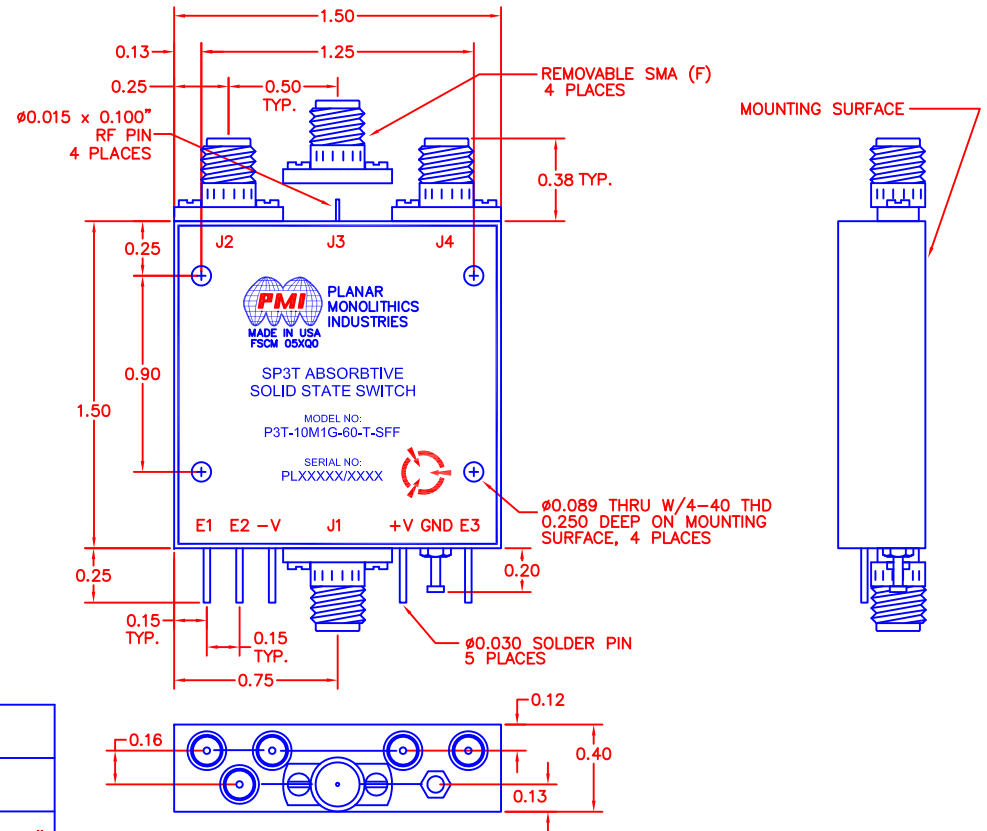

PMI CONFIDENTIAL AND PROPRIETARY

PLANAR MONOLITHICS INDUSTRIES, INC.
7311-F GROVE ROAD
FREDERICK, MARYLAND 21704 USA
TEL: 301-662-5019 FAX: 301-662-1731
WEBSITE: www.pmi-rf.com
E-MAIL: sales@pmi-rf.com
ISO 9001 CERTIFIED



APPROVALS		DATE	TITLE			
DRAWN <i>B. Thomas</i>		12/17/15	PRODUCT FEATURE P3T-10M1G-60-T-SFF			
CHECKED			SIZE A	FSCM NO. 05XQ0	DWG NO. 27026521	REV. 1
ISSUED			SCALE N:S	SHEET 1 OF 1		