

DESCRIPTION

PMI MODEL LM-10M2D5G-100CW-1KWP-TNCFM IS A RF LIMITER THAT OPERATES IN THE 10MHz TO 2.5GHz FREQUENCY RANGE. THIS LIMITER CAN HANDLE 100W CW AND 1KW PEAK (1% DUTY CYCLE, 1USEC MAXIMUM PULSE WIDTH) INPUT POWER AND PROVIDES A MAXIMUM LEAKAGE OF 14dBm MAXIMUM AT 10W CW INPUT. THIS MODEL HAS A LOW INSERTION LOSS OF 0.5dB AND A RECOVER TIME OF 2USEC TYPICAL.


REVISIONS				
ZONE	REV.	DESCRIPTION	DATE	APPROVED
	-	PRELIMINARY	11/6/18	

SPECIFICATIONS

- FREQUENCY RANGE:.....10 MHz TO 2.5GHz
- INSERTION LOSS:.....0.5dB TYPICAL
- INPUT/OUTPUT VSWR:.....1.3:1 MAXIMUM (AT -10dBm INPUT)
- IMPEDANCE:.....50 OHMS
- INPUT POWER:.....100 WATTS CW MAXIMUM (NOTES 1, 2)
1KW PEAK (1% DUTY CYCLE, 1USEC MAXIMUM PULSE WIDTH)
(NOTES 1, 2, 3)
- MAXIMUM FLAT LEAKAGE:.....14dBm MAXIMUM AT 10W CW
- P1dB:.....0dBm MINIMUM
- RECOVERY TIME:.....2usec TYPICAL
- CONNECTORS IN/OUT:.....TNC FEMALE/TNC MALE
- FINISH:.....GOLD PLATED

- NOTES:
 1. POWER RATING AT 25°C: DERATED LINEARLY TO ZERO @ 150°C
 2. HIGH POWER TEST DURATION: FULL RATED POWER FOR 10 SECONDS
 3. HIGH POWER PEAK CONDITIONS: 1KW PEAK (1% DUTY CYCLE, 1USEC MAXIMUM PULSE WIDTH)
 4. EXTERNAL DC BLOCKS ARE REQUIRED FOR PROPER FUNCTION.

MECHANICAL OUTLINE

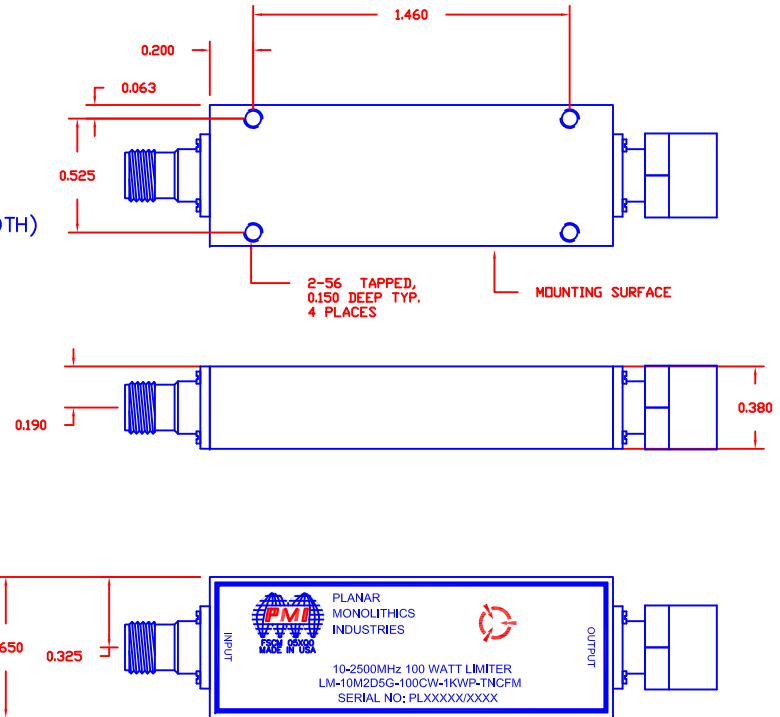

ENVIRONMENTAL RATINGS

- TEMPERATURE:.....-55°C TO +85° (OPERATING)
-60°C TO +100°C (STORAGE)
- STABILIZATION BAKE:.....MIL-STD-883, METHOD 1008, TEST COND. B
- ALTITUDE:.....50,000 ft (OPERATING)
- THERMAL CYCLE:.....MIL-STD-883, METHOD 1010, TEST COND. B
- CONSTANT ACCELERATION: MIL-STD-883, METHOD 2001, A (Y1 AXIS)
- EXTERNAL VISUAL:.....MIL-STD-883, METHOD 2009

NOTE: SPECIFICATIONS WILL VARY OVER OPERATING TEMPERATURE
NOTE: THE ABOVE SPECIFICATIONS ARE SUBJECT TO CHANGE OR REVISION

ALL DIMENSIONS ARE IN INCHES
TOLERANCES:
X.XX ±0.020
X.XXX ±0.010

PMI CONFIDENTIAL AND PROPRIETARY

PLANAR MONOLITHICS INDUSTRIES, INC.

7311-F GROVE ROAD
FREDERICK, MARYLAND 21704 USA
TEL: 301-662-5019 FAX: 301-662-1731
WEBSITE: www.pmi-rf.com
E-MAIL: sales@pmi-rf.com
ISO 9001 CERTIFIED



APPROVALS		DATE	TITLE		
DRAWN	<i>VR</i>	01/27/15	PRODUCT FEATURE		
REDRAWN	<i>EW</i>	11/6/18	LM-10M2D5G-100CW-1KWP-TNCFM		
ISSUED			SIZE	FSCM NO.	DWG NO.
			A	05XQ0	PRELIMINARY
			SCALE	N: S	SHEET 1 OF 1