## **DESCRIPTION:**

PFC model number 7CL16G-D3-CD-SFF is a Combline filter with SMA female connectors in and out. All filters will be machined and silver plated to provide the highest possible Q.

REVISIONS											
ZONE	REV.	DESCRIPTION	DATE	APPROVED							
	-	ORIGINAL RELEASE	11/28/01								

## **SPECIFICATIONS:**

• CENTER FREQUENCY: 16.00 GHz


• 3dB BANDWIDTH: 300 MHz


• VSWR IN THE PASS BAND: · · · 1.5:1 MAX.

• INSERTION LOSS (PASSBAND) · · <= -4 dB MAX.

• REJECTION FROM DC TO 16.12 GHz: -40 dB


REJECTION FROM 16.72 TO 40 GHz: -40 dB

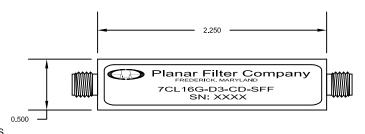



• CONNECTORS: SMA FEMALE CONNECTORS

• WEIGHT · · · · · · · · 1 OZ. TYP.

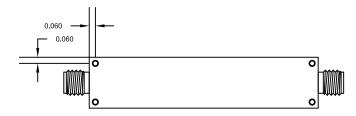

## **ENVIRONMENTAL RATINGS:**

SALT FOG: .

• TEMPERATURE: -55°C TO +85°C (OPERATING)

-65°C TO +125°C (STORAGE)

• FUNGUS: . . . MIL-STD-810C, METHOD 508.2

• TEMPERATURE CYCLE: MIL-STD-202F, METHOD 107

NOTE: THE ABOVE SPECIFICATIONS ARE SUBJECT TO CHANGE OR REVISION

MIL-STD-202F, METHOD 107D COND. A

ALL DIMENSIONS ARE IN INCHES TOLERANCES:

X.XX ±0.010

X.XXX ±0.005

PART NO.	Planar Filter Company 7311G Grove Road, Fredrick, Maryland									
APPROVALS	DATE	OUTLINE DRAWING								
DRAWN RAB	11/28/01									
CHECKED	7CL16G-D3-CD-SFF									
ISSUED		SIZE	FSCM NO.		DWG NO.					REV.
		A 1QJWO		155–1030					-	
İ		SCALE	N/A			-	SHEET	1	OF	1