

DESCRIPTION


PMI MODEL NO. LPF-18-19-21R5-SMF IS A LOW PASS FILTER WITH A CUT OFF FREQUENCY OF 18.0 GHz. IT HAS AN AVERAGE POWER HANDLING OF 1 WATT MINIMUM AND A MAXIMUM VSWR OF 1.7. THIS MODEL IS OUTFITTED WITH A SMA MALE CONNECTOR ON THE INPUT AND A SMA FEMALE CONNECTOR ON THE OUTPUT.

REVISIONS				
ZONE	REV.	DESCRIPTION	DATE	APPROVED
	-	PRELIMINARY	7/16/2019	

MECHANICAL OUTLINE

SPECIFICATIONS

- CUT-OFF FREQUENCY: ----- 18.0 GHz
- REJECTION: ----- 3 dB MIN @ 19 ± 0.3 GHz
30 dB MIN @ 21.5 ± 0.3 GHz
- AVERAGE POWER HANDLING: ----- 1 WATT MIN
- PEAK POWER HANDLING: ----- 10 WATTS MIN
- VSWR: ----- 1.7 MAX
- OPERATING CONDITION: ----- NATURAL CONVECTION @ 30°C
- CONNECTORS IN/OUT: ----- SMA MALE/SMA FEMALE
- FINISH: ----- PAINTED BLUE

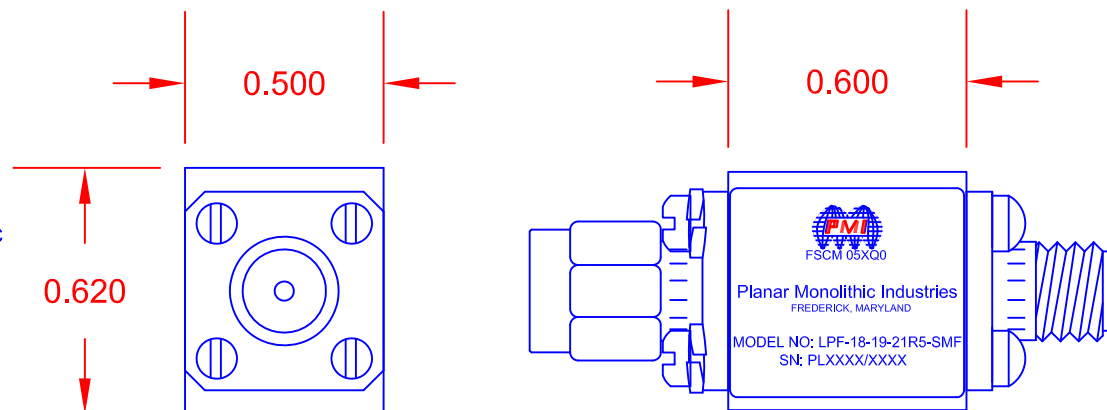

ENVIRONMENTAL RATINGS

- TEMPERATURE: ----- -55 °C TO +85 °C (OPERATING)
-65 °C TO +125 °C (STORAGE)
- HUMIDITY: ----- MIL-STD-202, METHOD 103B COND. B
- SHOCK: ----- MIL-STD-202, METHOD 213B COND. B
- VIBRATION: ----- MIL-STD-202, METHOD 204D COND. B
- ALTITUDE: ----- MIL-STD-202, METHOD 105C COND. B
- TEMPERATURE CYCLE: ----- MIL-STD-202, METHOD 107D COND. A

ALL DIMENSIONS
ARE IN INCHES [mm]
TOLERANCES:
X.XX ± 0.020
X.XXX ± 0.010

NOTE: SPECIFICATIONS WILL VARY OVER OPERATING TEMPERATURE

NOTE: THE ABOVE SPECIFICATIONS ARE SUBJECT TO CHANGE OR REVISION

PMI CONFIDENTIAL AND PROPRIETARY

PLANAR MONOLITHICS INDUSTRIES, INC.

7311-F GROVE ROAD

FREDERICK, MARYLAND 21704 USA

TEL: (301)-662-5019, FAX: (301)-662-1731

WEB: www.pmi-rf.com, EMAIL: sales@pmi-rf.com

ISO 9001 CERTIFIED



		TITLE PRODUCT FEATURE LPF-18-19-21R5-SMF				
APPROVALS	DATE					
DRAWN <i>EW</i>	7/16/19					
REDRAWN		SIZE A	FSCM NO. 05XQ0	DWG NO. PRELIMINARY	REV -	
ISSUED		SCALE N:S		SHEET 1 OF 1		