
#### DESCRIPTION


PMI MODEL: PEC-22-24G40G-4R0-24-292FF IS A LOW NOISE AMPLIFIER DESIGNED FOR MILITARY AND INDUSTRIAL APPLICATIONS. THIS AMPLIFIER IS SUPPLIED IN OUR PE2 HOUSING THAT CAN BE USED AS AN SMA CONNECTORIZED OR SURFACE MOUNTED COMPONENT. OTHER PACKAGES AND CONNECTOR TYPES ARE AVAILABLE. DATA IS AVAILABLE UPON REQUEST.

REVISIONS				
ZONE	REV.	DESCRIPTION	DATE	APPROVED
	A1	ORIGINAL PMI DESIGN RELEASE	02/28/17	

# PE2 HOUSING WITH CARRIER

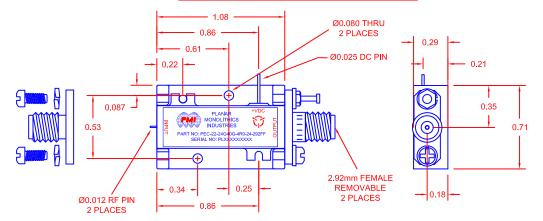

## PE2 HOUSING WITHOUT CARRIER (SURFACE MOUNT)

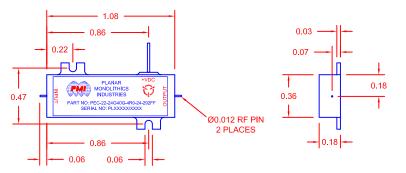

# PLANAR MONOLITHICS INDUSTRIES, INC.

7311-F GROVE ROAD FREDERICK, MARYLAND 21704 USA TEL: (301)-662-5019, FAX: (301)-662-1731 WEB: www.pmi-rf.com, EMAIL: sales@pmi-rf.com ISO 9001 CERTIFIED



PRODUCT FEATURE PEC-22-24G40G-4R0-24-292FF 24.0 to 40.0 GHz Low Noise Amplifier

SIZE FSCM NO. 27031131 Α 05XQ0 **A1** SCALE N:S SHEET 1 OF 1

#### **SPECIFICATIONS**

- FREQUENCY RANGE: ----- 24.0 TO 40.0 GHz
- GAIN: ----- 22 dB MINIMUM
- GAIN FLATNESS: ----- ±1,5 dB TYPICAL
- NOISE FIGURE: ------ 6.0 dB MAXIMUM
- OP1dB: ----- +24 dBm MINIMUM
- VSWR (INPUT/OUTPUT): ----- 2.5:1 MAXIMUM
- DC VOLTAGE SUPPLY: ----- +8 VDC
- DC CURRENT DRAW: ----- 500 mA MAXIMUM
- CONNECTORS: ----- 2.92mm FEMALE (X2)
- FINISH: ----- GOLD PLATED

### **FEATURES**

- INTERNAL VOLTAGE REGULATION
- UNCONDITIONAL STABILITY

### **AVAILABLE OPTIONS**

- VARIOUS PACKAGE TYPES
- VARIOUS CONNECTOR TYPES
- TEMPERATURE COMPENSATION
- HERMETIC SEALING
- GAIN AND PHASE MATCHING
- MIL-STD-883 SCREENING AVAILABLE

## **ENVIRONMENTAL RATINGS**

- TEMPERATURE: ----- -55 °C TO +75 °C (OPERATING)
  - -65 °C TO +125 °C (STORAGE)
- HUMIDITY: ----- MIL-STD-202, METHOD 103B COND. B
- SHOCK: ----- MIL-STD-202, METHOD 213B COND. B
- ALTITUDE: ----- MIL-STD-202, METHOD 105C COND. B
- TEMPERATURE CYCLE: ----- MIL-STD-202, METHOD 107D COND. A

ALL DIMENSIONS ARE IN INCHES TOLERANCES: X.XXX

CHECKED

SSUED

NOTE: SPECIFICATIONS WILL VARY OVER OPERATING TEMPERATURE NOTE: THE ABOVE SPECIFICATIONS ARE SUBJECT TO CHANGE OR REVISION

PMI CONFIDENTIAL AND PROPRIETARY