DESCRIPTION:

PFC model number CL16D54-300-CD-SFF is a Combline filter with SMA female connectors in and out. All filters will be machined and silver plated to provide the highest possible Q.

REVISIONS											
	ZONE	REV.	DESCRIPTION	DATE	APPROVED						
		_	ORIGINAL RELEASE	6/20/00							

SPECIFICATIONS:

• CENTER FREQUENCY: 16.54 GHz

• 3dB BANDWIDTH: 300 MHz


• VSWR IN THE PASS BAND: 1.5:1 MAX.

• INSERTION LOSS (PASSBAND) <= -4 dB MAX.

• REJECTION FROM DC TO 16.24 GHz: -40 dB

• REJECTION FROM 16.84 TO 40 GHz: -40 dB






• CONNECTORS: SMA FEMALE CONNECTORS

• SIZE 2.025" (L) x 0.40" (W) x 0.50" (H)

• WEIGHT 1 OZ. TYP.

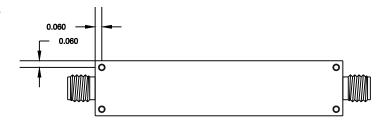

ENVIRONMENTAL RATINGS:

• TEMPERATURE: -55°C TO +85°C (OPERATING)

-65°C TO +125°C (STORAGE)

• HUMIDITY: MIL-STD-202F, METHOD 103B COND. B

• SHOCK: MIL-STD-202F, METHOD 213B COND. B

• VIBRATION: MIL-STD-202F, METHOD 204D COND. B

ALTITUDE: MIL-STD-202F, METHOD 105C COND. B

• SALT FOG: MIL-STD-202F, METHOD 107D COND. A

• FUNGUS: MIL-STD-810C, METHOD 508.2

• TEMPERATURE CYCLE: MIL-STD-202F, METHOD 107

ALL DIMENSIONS ARE IN INCHES TOLERANCES: XXX ±0.010 XXXX ±0.005

PF60-24	PF60-244				Planar Filter Company 7311G Grove Road, Fredrick, Maryland							
APPROVALS	DATE	TITLE			1044, 1		<u> y</u>					
S. PALACIO	6/20/00	OUTLINE DRAWING CL16D54-300-CD-SFF										
CHECKED												
ISSUED		SIZE	FSCM NO.		DWG NO.					REV.		
		Α	1Q.	JWO		155-0	311			_		
		SCALE	N/A				SHEET	1 (DF.	1		

NOTE: THE ABOVE SPECIFICATIONS ARE SUBJECT TO CHANGE OR REVISION