

## DESCRIPTION

PMI MODEL PTB-60-120-5R0-10-220VAC-SFF IS A PORTABLE AMPLIFIER THAT OPERATES OVER THE 1.0 TO 20.0 GHz FREQUENCY RANGE. THIS MODEL PROVIDES 60 dB OF TYPICAL GAIN WITH AN OP1dB OF +10 dBm MINIMUM. THIS AMPLIFIER FEATURES AN ON/OFF SWITCH THAT IS LOCATED ON THE FRONT PANEL. THIS UNIT OPERATES ON 220 TO 230 VAC AND IS SUPPLIED WITH A 6 FOOT STANDARD EU 2-PRONG STYLE POWER CORD.

## SPECIFICATIONS

- FREQUENCY RANGE: \_\_\_\_\_ 1.0 TO 20.0 GHz
- GAIN: \_\_\_\_\_ +60 dB TYP
- GAIN FLATNESS: \_\_\_\_\_ ±3.0 dB TYP
- NOISE FIGURE: \_\_\_\_\_ 5.0 dB MAX
- OP1dB: \_\_\_\_\_ +10 dBm MIN
- VSWR (IN/OUT): \_\_\_\_\_ 2.0:1 MAX
- CONNECTORS (IN/OUT): \_\_\_\_\_ SMA FEMALE
- AC VOLTAGE SUPPLY: \_\_\_\_\_ 220 to 230 VAC  
\*SUPPLIED WITH A 6 FOOT STANDARD EU 2-PRONG STYLE POWER CORD
- SIZE \_\_\_\_\_ (L) 4.92" X (W) 4.92" X (H) 2.10"
- FINISH \_\_\_\_\_ BLUE POWDER COATED


## ENVIRONMENTAL RATINGS

- **TEMPERATURE:** \_\_\_\_\_ -40°C TO +85°C (OPERATING)  
\_\_\_\_\_ -40°C TO +100°C (NON-OPERATING)
- **HUMIDITY:** \_\_\_\_\_ MIL-STD-202F, METHOD 103B COND. B
- **SHOCK:** \_\_\_\_\_ MIL-STD-202F, METHOD 213B COND. B
- **VIBRATION:** \_\_\_\_\_ MIL-STD-202F, METHOD 204D COND. B
- **ALTITUDE:** \_\_\_\_\_ MIL-STD-202F, METHOD 105C COND. B
- **TEMPERATURE CYCLE:** \_\_\_\_\_ MIL-STD-202F, METHOD 107D COND. A

NOTE: SPECIFICATIONS WILL VARY OVER OPERATING TEMPERATURE  
NOTE: THE ABOVE SPECIFICATIONS ARE SUBJECT TO CHANGE OR REVISION

NOTES:  
1) DIMENSIONS ARE IN INCHES  
2) TOLERANCES: X.XX ±0.020  
X.XXX ±0.010

REVISIONS				
ZONE	REV.	DESCRIPTION	DATE	APPROVED
	1	ORIGINAL RELEASE	11/13/15	
	A1	ECN # 17-0031	02/25/17	

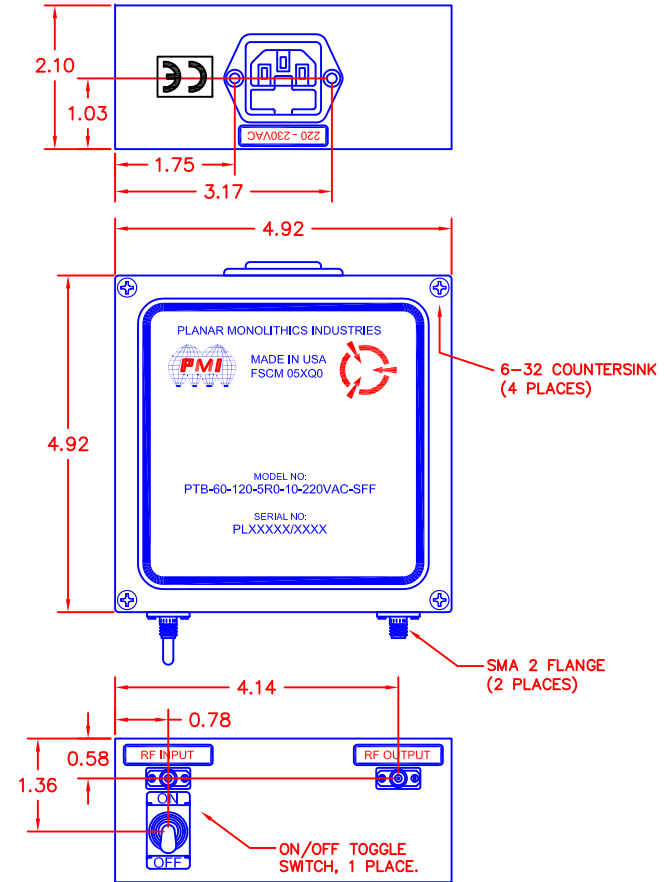

PMI CONFIDENTIAL AND PROPRIETARY

## PLANAR MONOLITHICS INDUSTRIES, INC.

7311-F GROVE ROAD  
FREDERICK, MARYLAND 21704 USA  
TEL: 301-662-5019 FAX: 301-662-1731  
WEBSITE: [www.pmi-rf.com](http://www.pmi-rf.com)  
E-MAIL: [sales@pmi-rf.com](mailto:sales@pmi-rf.com)  
ISO 9001 CERTIFIED



APPROVALS		DATE	TITLE			
DRAWN <i>SAB</i>		11/13/15	PRODUCT FEATURE			
REDRAWN			PTB-60-120-5R0-10-220VAC-SFF			
ISSUED			SIZE	FSCM NO.	DWG NO.	REV.
			A	05XQ0	27028022	A1
			SCALE	N: S		SHEET 1 OF 1