DESCRIPTION

LOW NOISE AMPLIFIER DESIGNED FOR MILITARY AND INDUSTRIAL APPLICATIONS. THIS AMPLIFIER IS SUPPLIED IN OUR STANDARD PE2 HOUSING THAT CAN BE USED AS AN SMA CONNECTORIZED OR A SURFACE MOUNT COMPONENT. OTHER PACKAGES AND CONNECTOR TYPES ARE AVAILABLE. THIS MODEL PROVIDES THE FOLLOWING PERFORMANCE. DATA IS AVAILABLE UPON REQUEST.

SPECIFICATIONS

- FREQUENCY RANGE: 0.25 to 8.0 GHz
- GAIN FLATNESS: ±1.25dB MAXIMUM
- NOISE FIGURE:
 4.5 dB TYPICAL
- OP1dB:
 +15 dBm MINIMUM
- IMPEDANCE: 50 OHMS

EXCLUDING CONNECTORS

• FINISH — GOLD PLATED

FEATURES

- INTERNAL VOLTAGE REGULATION
- UNCONDITIONAL STABILITY

AVAILABLE OPTIONS

- VARIOUS PACKAGE TYPES
- VARIOUS CONNECTOR TYPES
- TEMPERATURE COMPENSATION
- GAIN AND PHASE MATCHING
- MIL-STD-883 SCREENING AVAILABLE

ENVIRONMENTAL RATINGS

- TEMPERATURE: -54°C TO + 85°C (OPERATING)
- -65°C TO +125°C (STORAGE)
- HUMIDITY: _____ MIL-STD-202F, METHOD 103B COND. B
- SHOCK: _____ MIL-STD-202F, METHOD 213B COND. B
- ALTITUDE: _____ MIL-STD-202F, METHOD 105C COND. B
- TEMPERATURE CYCLE:—— MIL-STD-202F. METHOD 107D COND. A

NOTE: SPECIFICATIONS WILL VARY OVER OPERATING TEMPERATURE NOTE: THE ABOVE SPECIFICATIONS ARE SUBJECT TO CHANGE OR REVISION ALL DIMENSIONS ARE IN INCHES

TOLERANCES:


X.XX ±0.020

X.XXX ±0.010


REVISIONS										
ZONE	REV.	DESCRIPTION	DATE	APPROVED						
	_	PRELIMINARY	6/10/15	KM						

MECHANICAL OUTLINE

PE2 HOUSING WITH CARRIER

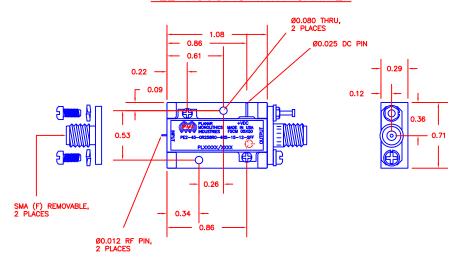

PE2 HOUSING WITHOUT CARRIER (SURFACE MOUNT)

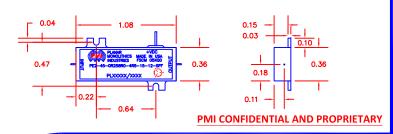

PLANAR MONOLITHICS INDUSTRIES, INC.

7311-F GROVE ROAD FREDERICK, MARYLAND 21704 USA TEL: 301-662-5019 FAX: 301-662-1731 WEBSITE: www.pmi-rf.com E-MAIL: sales@pmi-rf.com

ISO 9001 CERTIFIED



	TITLE	TITLE								
APPROVALS DATE			PRODUCT FEATURE							
DRAWN 6/10/15			PE2-45-0R258R0-4R5-15-12-SFF							
CHECKED		SIZE	FSCM NO.		DWG NO.					REV.
1001150		Α	A 05XQ0		D PRELIMINARY				_	
ISSUED		SCALE	N:S				SHEET	1	OF	1