

Description:

PMI Model No. PEC2-2G18G-21DBM-LM-SFF-OPT28 is a 2.0 to 8.0 GHz limiting amplifier that provides a limited output power level of +10dBm Minimum input power range of -45 to +10dBm CW. This model has output power level versus frequency compensation such that the limited output power has a flat frequency response. Supplied in a small housing measuring only 2.98" X 0.78" X 0.26"

This model provides the following performance.

Specifications:

- Frequency Range:
- Gain:
- Input Power:
- Saturated Output Power:
- VSWR Input/Output:
- Maximum RF Input Power:
- DC Voltage Supply:
- DC Current Draw:
- Connectors:
- Operating Temperature:
- Finish:
- 2.0 to 8.0 GHz
- 60 dB minimum
- 45 to +10dBm CW
- +10.0 dBm Min.
- 2.0:1 Max.
- +17 dBm CW
- +15 VDC *
- 700 mA Max.
- SMA(F)
- 20 to +70 Deg. C
- Gold Plated


* (Including Reverse Polarity Protection and over voltage protection up to +/-25VDC)

Environmental Ratings:

- Temperature:
- Humidity:
- Shock:
- Altitude:
- Temperature Cycle:
- EMI/EMC:
- 20 to +70 Deg. C (Operating)
- 30 to +70 Deg. C (Storage)
- MIL-STD-202F, METHOD 103B COND B.
- MIL-STD-202F, METHOD 213B COND B.
- MIL-STD-202F, METHOD 105C COND B.
- MIL-STD-202F, METHOD 107D COND A
- Designed to meet MIL-STD-461E

Note: The above specifications are subject to change or revision.

REVISIONS				
ZONE	REV.	DESCRIPTION	DATE	APPROVED
	-	PRELIMINARY	7/14/16	

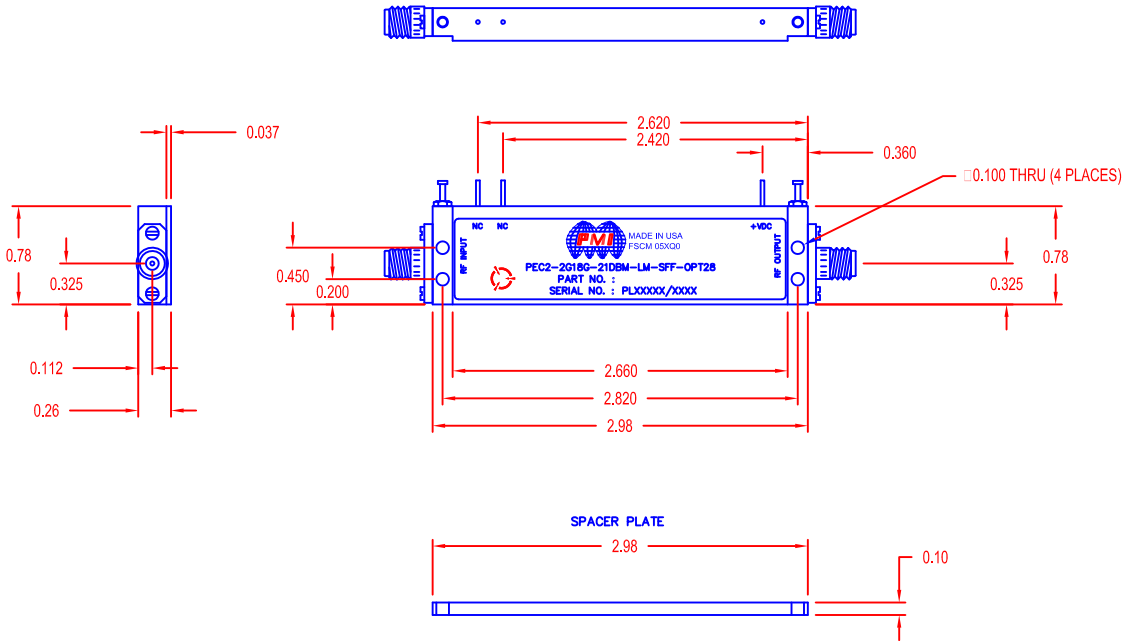

ALL DIMENSIONS ARE IN INCHES
TOLERANCES:
X.XX ±0.020
X.XXX ±0.010

PMI CONFIDENTIAL AND PROPRIETARY				
PART NO.		PLANAR MONOLITHICS INDUSTRIES, INC. 7311-F GROVE ROAD FREDERICK, MARYLAND 21704 USA TEL: 301-462-5019 FAX: 301-462-4731 WEBSITE: WWW.PMI-LLC.COM E-MAIL: SALES@PMI-LLC.COM ISO 9001 CERTIFIED		
APPROVALS		DATE		
DRAWN		7/14/16		
CHECKED				
ISSUED				
SIZE		FROM NO.		REV.
B		05XQ0		-
SCALE		N/S		SHEET 1 OF 1