

DESCRIPTION

THE MODEL PMSNN-1DR-2G18G-022T-STD IS A HIGH SPEED, SINGLE POLE, SINGLE THROW, REFLECTIVE SWITCH WITH AN OPERATING FREQUENCY RANGE OF 2.0 TO 18.0 GHz. THIS SWITCH OFFERS 70 dB ISOLATION WITH A LOW INSERTION LOSS OF 2.2 dB WITH A RISE & FALL TIME OF 20 ns MAXIMUM. THE PACKAGE MEASURES 0.82" x 0.625" x 0.22".

SPECIFICATIONS:

- FREQUENCY RANGE: 2.0 TO 18.0 GHz
- INSERTION LOSS: 2.2 dB MAXIMUM
- ISOLATION: 70 dB MINIMUM
- VSWR (ON/OFF): 2.0:1 MAXIMUM
- SWITCHING SPEED: 20 ns MAXIMUM
(10 RF TO 90% RF & 90% RF TO 10% RF)
- OPERATING POWER: +15dBm MAXIMUM
- CONTROL: TTL LOGIC "0" = INSERTION LOSS
TTL LOGIC "1" = ISOLATION
- POWER SUPPLY: +5V & -15 VDC
- CONNECTORS:
 - RF: SMA FEMALE
 - CONTROL: SOLDER PIN
- SIZE: (L) 0.82" X (W) 0.625" X (H) 0.22"
- FINISH: BLUE EPOXY POLIMIDE COATING IAW MIL-C-22750, TYPE I OVER EPOXY POLIMIDE PRIMER IAW MIL-P-23377, TYPE I, CLASS 1 OR 3.
- SEALING: EPOXY SEALED


ENVIRONMENTAL RATINGS:

- TEMPERATURE: -55°C TO +85°C (OPERATING)
-65°C TO +125°C (STORAGE)
- HUMIDITY: MIL-STD-202F, METHOD 103B COND. B
- SHOCK: MIL-STD-202F, METHOD 213B COND. B
- VIBRATION: MIL-STD-202F, METHOD 204D COND. B
- ALTITUDE: MIL-STD-202F, METHOD 105C COND. B
- TEMPERATURE CYCLE: MIL-STD-202F, METHOD 107D COND. A

NOTE: SPECIFICATIONS WILL VARY OVER OPERATING TEMPERATURE
NOTE: THE ABOVE SPECIFICATIONS ARE SUBJECT TO CHANGE OR REVISION

ALL DIMENSIONS ARE IN INCHES
TOLERANCES:
X.XX ±0.020
X.XXX ±0.010

REVISIONS				
ZONE	REV.	DESCRIPTION	DATE	APPROVED
	-	PRELIMINARY (-QF)	5/5/15	JCM

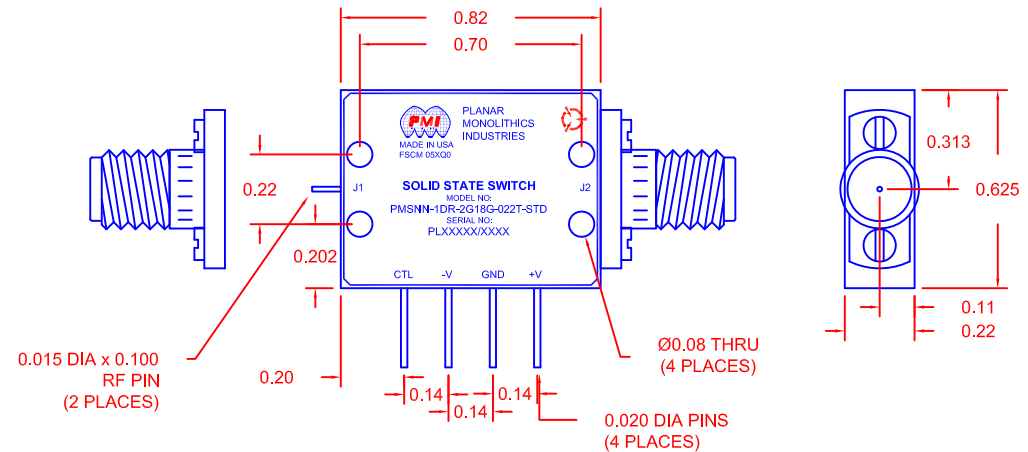

PMI CONFIDENTIAL AND PROPRIETARY

PLANAR MONOLITHICS INDUSTRIES, INC.

7311-F GROVE ROAD
FREDERICK, MARYLAND 21704 USA
TEL: 301-662-5019 FAX: 301-662-1731
WEBSITE: www.pmi-rf.com
E-MAIL: sales@pmi-rf.com
ISO 9001 CERTIFIED



APPROVALS		DATE	TITLE		
DRAWN <i>K. MASON</i>		5/5/15	PRODUCT FEATURE		
CHECKED			PMSNN-1DR-2G18G-022T-STD		
ISSUED			SIZE	FSCM NO.	DWG NO.
			A	05XQ0	PRELIMINARY
			SCALE	N:S	SHEET 1 OF 1