

DESCRIPTION

PMI MODEL P2T-057-60-T-2W-SFF IS AN ABSORPTIVE, SINGLE POLE TWO THROW SWITCH THAT OPERATES OVER THE 0.5 TO 7 GHz FREQUENCY RANGE. THIS UNIT FEATURES LOW INSERTION LOSS WITH 2 WATT PEAK POWER HANDLING.

SPECIFICATIONS

- FREQUENCY:----- 0.5 TO 7 GHz
- INSERTION LOSS:----- 1.8 dB MAX
- ISOLATION:----- 60 dB MIN
- VSWR (On/Off):----- 2.0:1 MAX
- INPUT POWER (SURVIVAL):----- 0.5 W CW, 2 W PEAK, 1%DC, 100 ns MAX
- SWITCHING SPEED:----- 100 ns MAX
- LOGIC CONTROL:----- +5V TTL
- DC SUPPLY:----- +5V TO +15V @ 60 mA MAX
-5V TO -15V @ 50 mA MAX
- CONNECTORS:----- SMA (F)
- FINISH:----- GOLD PLATED

TTL LOGIC CONTROL TABLE

CTL1	CTL2	FUNCTION
0	1	J0 TO J1 ON, J0 TO J2 OFF
1	0	J0 TO J1 OFF, J0 TO J2 ON

ENVIRONMENTAL RATINGS

- TEMPERATURE:----- -40 °C TO +85 °C (OPERATING)
-55 °C TO +125 °C (STORAGE)
- HUMIDITY:----- MIL-STD-202, METHOD 103B COND. B
- SHOCK:----- MIL-STD-202, METHOD 213B COND. B
- VIBRATION:----- MIL-STD-202, METHOD 204D COND. B
- ALTITUDE:----- MIL-STD-202, METHOD 105C COND. B
- TEMPERATURE CYCLE:----- MIL-STD-202, METHOD 107D COND. A

NOTE: SPECIFICATIONS WILL VARY OVER OPERATING TEMPERATURE


NOTE: THE ABOVE SPECIFICATIONS ARE SUBJECT TO CHANGE OR REVISION

ALL DIMENSIONS ARE IN INCHES
TOLERANCES:
X.XX ±0.020
X.XXX ±0.010

PMI CONFIDENTIAL AND PROPRIETARY

REVISIONS				
ZONE	REV.	DESCRIPTION	DATE	APPROVED
	1	PRELIMINARY	9/8/21	

MECHANICAL OUTLINE

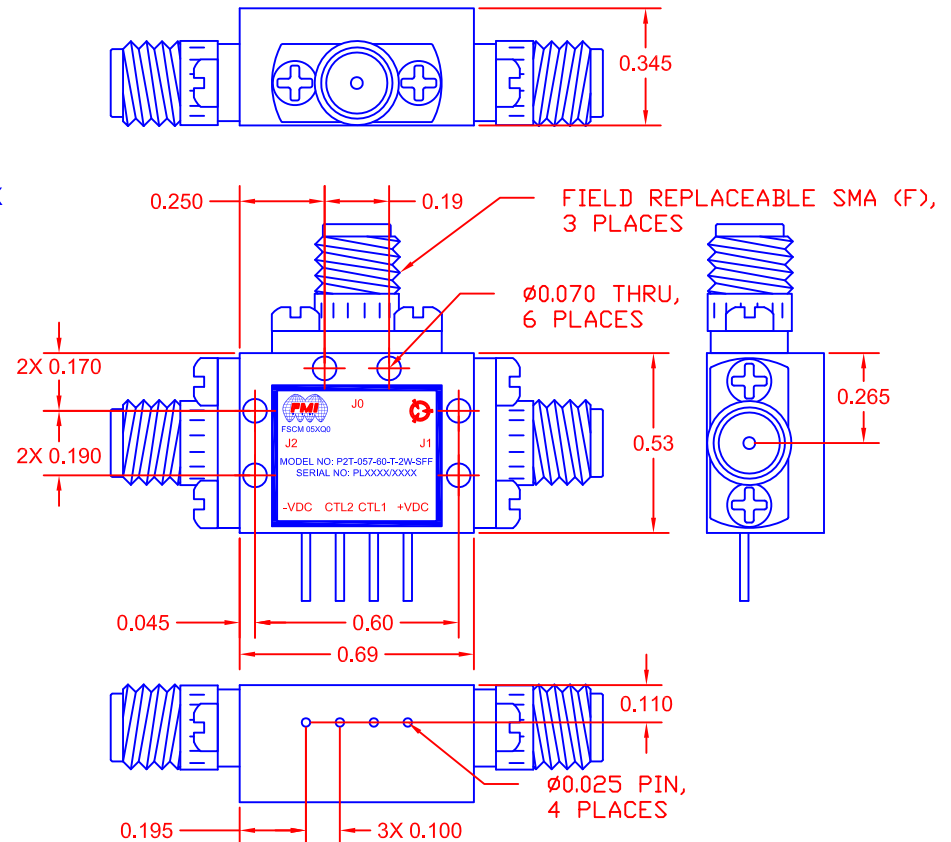

PLANAR MONOLITHICS INDUSTRIES, INC.
7311-F GROVE ROAD
FREDERICK, MARYLAND 21704 USA
TEL: (301)-662-5019, FAX: (301)-662-1731
WEB: www.pmi-rf.com, EMAIL: sales@pmi-rf.com
ISO 9001 CERTIFIED



APPROVALS		DATE	TITLE		
DRAWN <i>DPD</i>		9/8/21	PRODUCT FEATURE P2T-057-60-T-2W-SFF		
CHECKED			SIZE A	FSCM NO. 05XQ0	DWG NO. PRELIMINARY
ISSUED			SCALE N:S		SHEET 1 OF 1