

DESCRIPTION

THE SDLVA-2020 SERIES OF TRULY DC-COUPLED SUCCESSIVE DETECTION LOG VIDEO AMPLIFIERS (SDLVA'S) ARE AVAILABLE IN EXTENDED 70/75dB DYNAMIC RANGE OVER THE RANGE OF 2.0-18.0 GHz BANDWIDTH, WITH TRUE DC COUPLING. UNITS EMPLOY PLANAR DIODE DETECTORS AND INTEGRATED VIDEO CIRCUITRY FOR HIGH SPEED PERFORMANCE AND OUTSTANDING RELIABILITY. THE DLVA'S ARE OF SUPERIOR CONSTRUCTION USING STATE-OF-THE-ART MIC/MMIC TECHNOLOGY. THE SIZE IS 3.00" X 3.50" X 0.50".

FEATURES

- TRULY DC COUPLED
- WIDE BANDWIDTHS
- FAST RISE TIMES
- SHORT RECOVERY TIMES
- SUPERIOR ACCURACY
- EXTENDED DYNAMIC RANGE CAPABILITY
- MINIATURE SIZE
- 7.2oz WEIGHT

SPECIFICATIONS

- FREQUENCY RANGE: 6.0 TO 18.0 GHz
- FREQUENCY FLATNESS: ± 2.0 dB Typ (2.0-18.0GHz)
- TSS: -68dBm Min (2.0-18.0GHz)
- VSWR: 3.0:1, (2.0-18.0GHz, @ -20dBm)
- LOGGING RANGE: -70dBm TO +10dBm
- LOG LINEARITY: ± 1.75 dB Max (-70dBm TO +10dBm)
- LOG SLOPE: 20mV/dB ($\pm 10\%$ TOLERANCE)
- LOG TEMPERATURE STABILITY: ± 1.75 dB (0°C TO 60°C)
- RISE TIME (10% TO 90%): 30ns Max
- RECOVERY TIME: 500ns Max (-70dBm TO +10dBm)
- OUTPUT POWER: +10dBm ± 2.5 dB Typ
- OUTPUT VIDEO LOAD: 100 OHMS $\pm 10\%$ OR AS DESIRED
- POWER SUPPLY: +15V @ 600 mA Max
-15V @ 200 mA Max
- SIZE: 3.00" (L) x 3.50" (W) x 0.50" (H)
- FINISH: PAINTED BLUE / MOUNTING SIDE FREE OF PAINT (GOLD PLATED)


ENVIRONMENTAL RATINGS:

- TEMPERATURE: -54°C TO +85°C (OPERATING)
-65°C TO +100°C (STORAGE)
- HUMIDITY: MIL-STD-202F, METHOD 103B COND. B
- SHOCK: MIL-STD-202F, METHOD 213B COND. B
- VIBRATION: MIL-STD-202F, METHOD 204D COND. B
- ALTITUDE: MIL-STD-202F, METHOD 105C COND. B
- TEMPERATURE CYCLE: MIL-STD-202F, METHOD 107D COND. A

NOTE: SPECIFICATIONS WILL VARY OVER OPERATING TEMPERATURE
NOTE: THE ABOVE SPECIFICATIONS ARE SUBJECT TO CHANGE OR REVISION

ALL DIMENSIONS ARE IN INCHES
TOLERANCES:
X.XX ± 0.020
X.XXX ± 0.010

REVISIONS				
ZONE	REV.	DESCRIPTION	DATE	APPROVED
	-	PRELIMINARY	9/26/17	
	1	ECN # 22-0092	8/1/22	

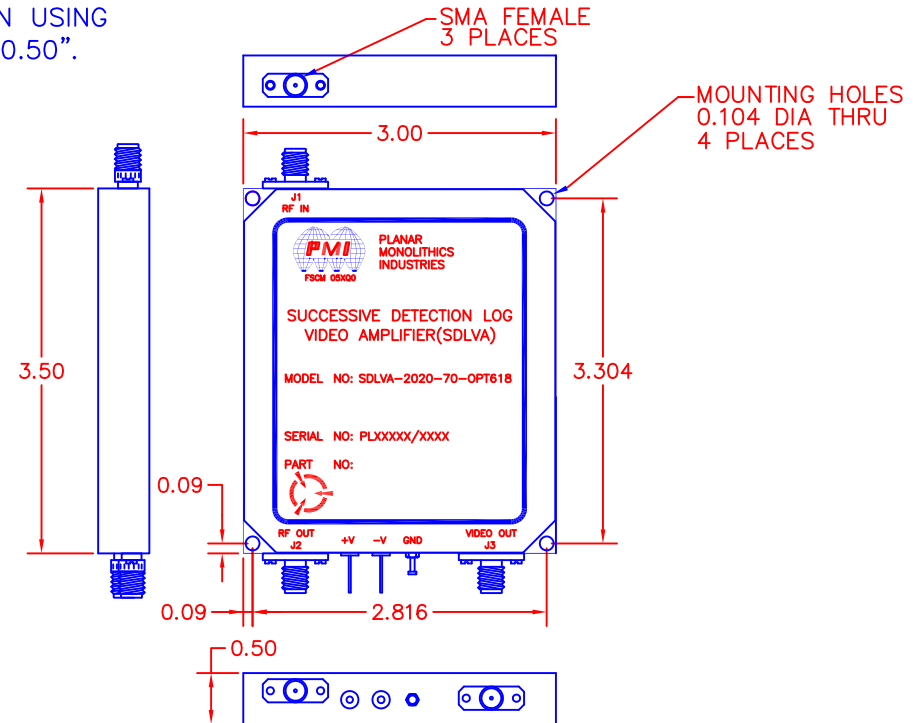

PMI CONFIDENTIAL AND PROPRIETARY

PLANAR MONOLITHICS INDUSTRIES, INC.


7311-F GROVE ROAD
FREDERICK, MARYLAND 21704 USA
TEL: 301-662-5019 FAX: 301-662-1731
WEBSITE: www.pmi-rf.com
E-MAIL: sales@pmi-rf.com
ISO 9001 CERTIFIED



APPROVALS		DATE	TITLE			REV.
DRAWN <i>JS</i>		11/12/14	PRODUCT FEATURE			1
CHECKED <i>EW</i>		9/26/17	SDLVA-2020-70-OPT618			
ISSUED			SUCCESSIVE DETECTION LOG VIDEO AMPLIFIER			
SIZE	FSCM NO.	OWG NO.	PRELIMINARY			
A	05XQ0					
SCALE N:S			SHEET 1 OF 2			

DESCRIPTION

THE SDLVA-2020 SERIES OF TRULY DC-COUPLED SUCCESSIVE DETECTION LOG VIDEO AMPLIFIERS (SDLVA'S) ARE AVAILABLE IN EXTENDED 70/75dB DYNAMIC RANGE OVER THE RANGE OF 2.0-18.0 GHz BANDWIDTH, WITH TRUE DC COUPLING. UNITS EMPLOY PLANAR DIODE DETECTORS AND INTEGRATED VIDEO CIRCUITRY FOR HIGH SPEED PERFORMANCE AND OUTSTANDING RELIABILITY. THE DLVA'S ARE OF SUPERIOR CONSTRUCTION USING STATE-OF-THE-ART MIC/MMIC TECHNOLOGY. THE SIZE IS 3.00" X 3.50" X 0.50".

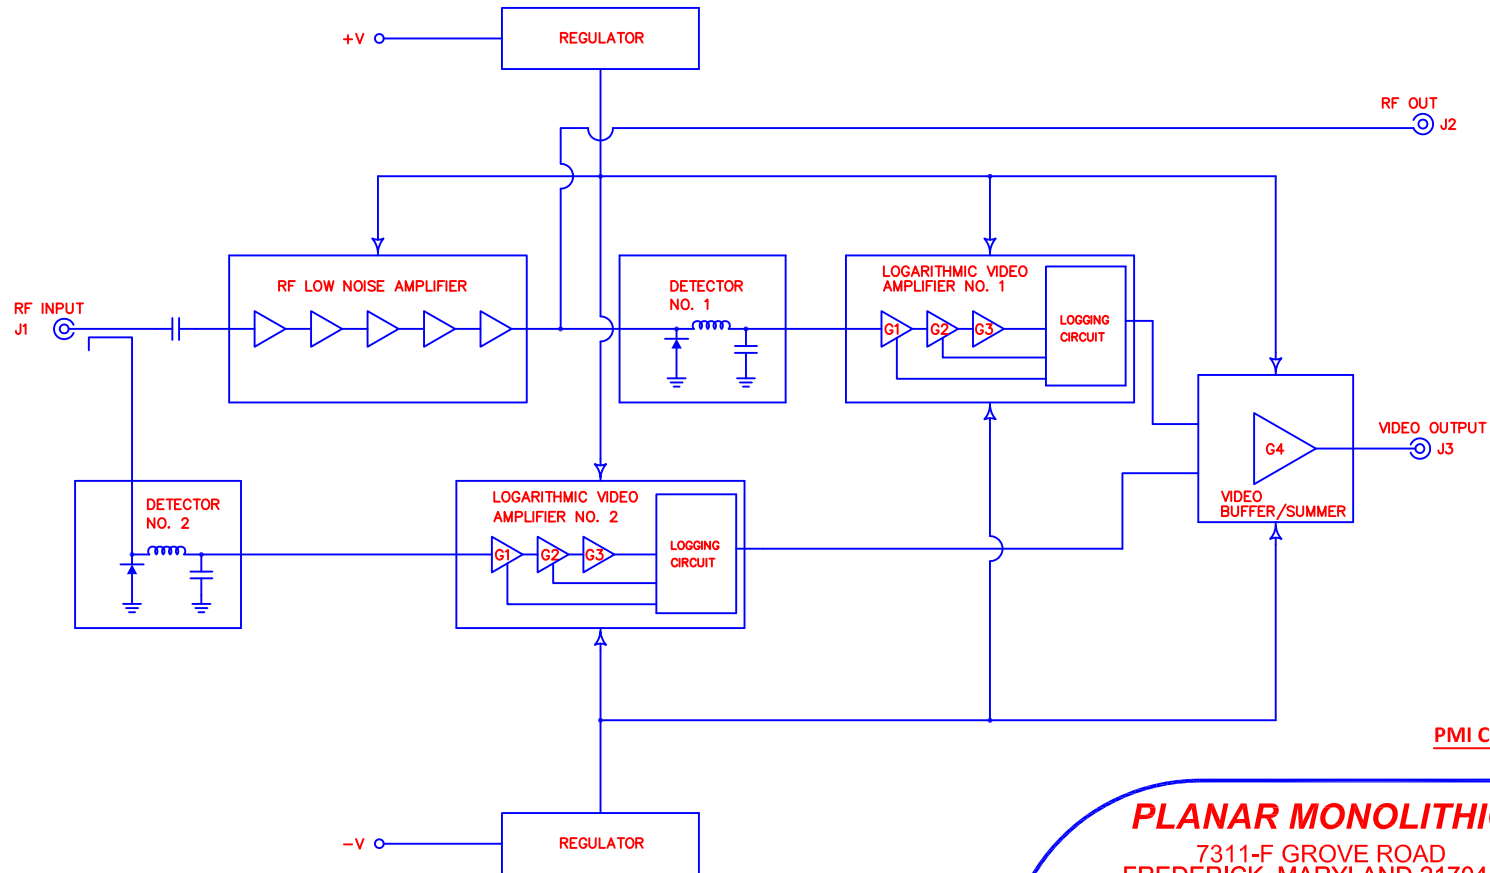

PMI CONFIDENTIAL AND PROPRIETARY

PLANAR MONOLITHICS INDUSTRIES, INC.
 7311-F GROVE ROAD
 FREDERICK, MARYLAND 21704 USA
 TEL: 301-662-5019 FAX: 301-662-1731
 WEBSITE: www.pmi-rf.com
 E-MAIL: sales@pmi-rf.com
 ISO 9001 CERTIFIED



ALL DIMENSIONS ARE IN INCHES
 TOLERANCES:
 X.XX ±0.020
 X.XXX ±0.010

APPROVALS		DATE	TITLE			
DRAWN <i>JS</i>		11/12/14	PRODUCT FEATURE			
REDRAWN <i>BW</i>		9/26/17	SDLVA-2020-70-OPT618			
ISSUED			SUCCESSIVE DETECTION LOG VIDEO AMPLIFIER			
SIZE	FSCM NO.	DWG NO.	REV.			
A	05XQ0		1	PRELIMINARY		
SCALE N:S			SHEET 2 OF 2			