



REVISIONS				
ZONE	REV.	DESCRIPTION	DATE	APPROVED
	A		03/21/00	

DESCRIPTION:

AMC MODEL SWN-1170-6DR-OPT618 IS A HIGH SPEED NON-REFLECTIVE SINGLE POLE SIX THROW SWITCH MODULE WITH LOW INSERTION LOSS, HIGH ISOLATION AND WITH INTEGRAL TTL DRIVER, DESIGNED FOR 6 GHz TO 18 GHz OPERATION.

SPECIFICATIONS:

- FREQUENCY: 6 GHz TO 18 GHz
- INSERTION LOSS: 4.25dB
- ISOLATION: 6 GHz TO 18 GHz: 70dB
- VSWR: 2.0:1
- SPEED: RISE: 10ns TYPICAL, 15ns MAXIMUM
FALL: 10ns TYPICAL, 15ns MAXIMUM
DELAY ON: 75ns TYPICAL, 100ns MAXIMUM
DELAY OFF: 75ns TYPICAL, 100ns MAXIMUM
- POWER INPUT: (CW)+20dBm
- SURVIVAL POWER: 1 WATT CW, 10 WATTS PEAK 1 usec
- CONTROL: TTL LOGIC "0"=ON "1"=OFF
- TEMPERATURE: SCREENED AT -65°C
- POWER SUPPLY: +5V @ 300 mA MAXIMUM
-5V @ 100mA MAXIMUM
- WEIGHT: 1.6 OUNCES

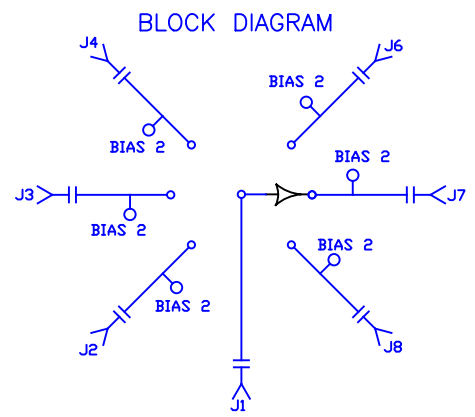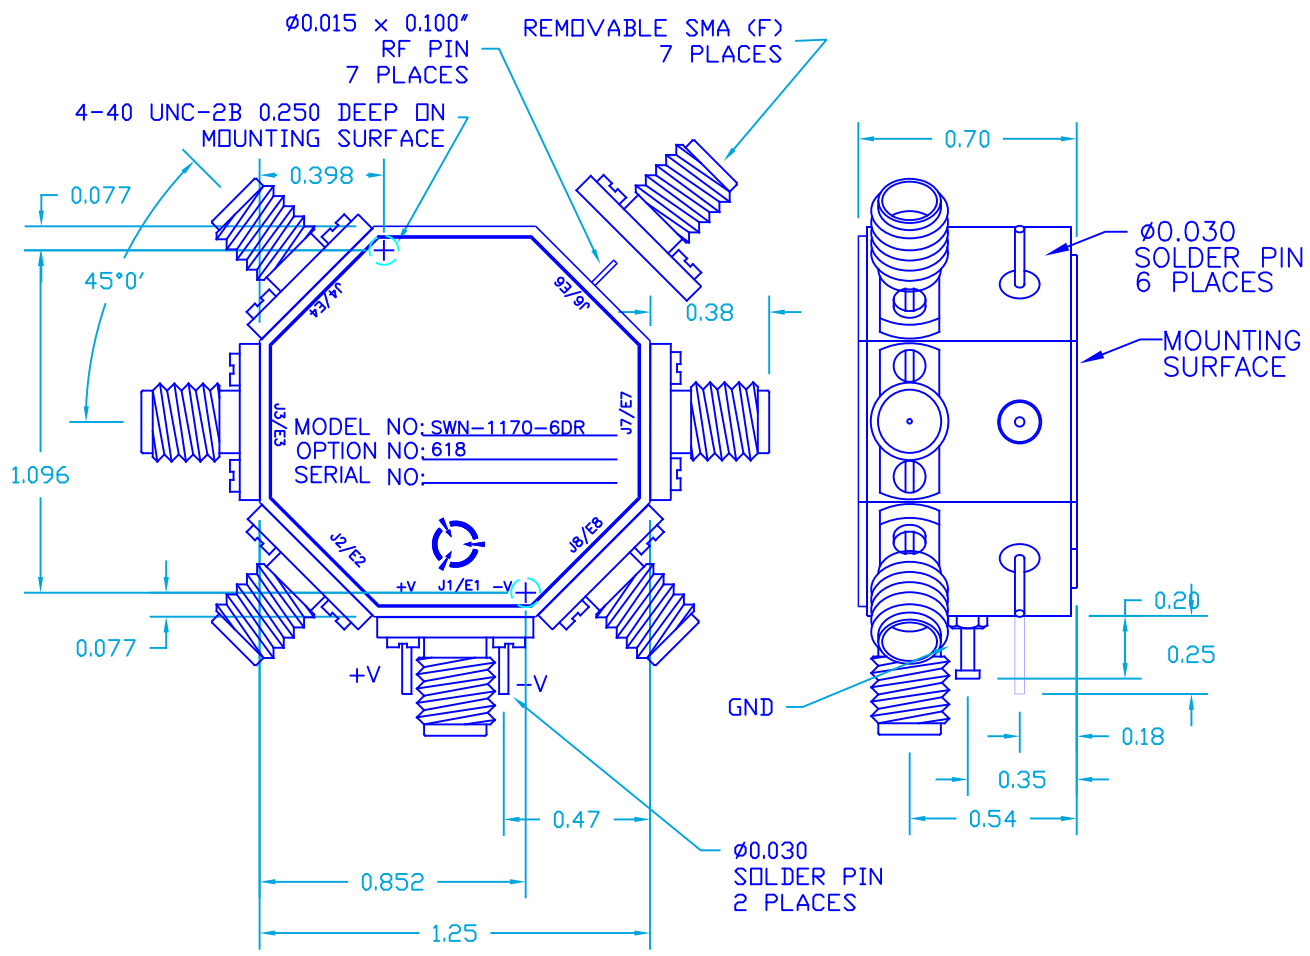

CONFIDENTIAL AND PROPRIETARY

ENVIRONMENTAL RATINGS:

- TEMPERATURE: -65°C TO +85°C (OPERATING)
-65°C TO +125°C (STORAGE)
- HUMIDITY: MIL-STD-202F, METHOD 103B COND. B
- SHOCK: MIL-STD-202F, METHOD 213B COND. B
- VIBRATION: MIL-STD-202F, METHOD 204D COND. B
- ALTITUDE: MIL-STD-202F, METHOD 105C COND. B
- TEMPERATURE CYCLE: MIL-STD-202F, METHOD 107D COND. A

ALL DIMENSIONS ARE IN INCHES
TOLERANCES:
X.XX ±0.020
X.XXX ±0.010

NOTE: THE ABOVE SPECIFICATIONS ARE SUBJECT TO CHANGE OR REVISION

CONTRACT NO.		PLANAR MONOLITHICS INDUSTRIES, INC FREDERICK, MARYLAND			
APPROVALS	DATE	TITLE			
DRAWN <i>JPH</i>	03/21/00	PRODUCT FEATURE SWN-1170-6DR-OPT618			
CHECKED		SIZE	FSCM NO.	DWG NO.	REV.
ISSUED		A	05XQ0		A
		SCALE	N/S	SHEET	1 of 1