





**Summary Data
For
EWDM-2G6G-65-70MV-1**

13	SW Linear Gain	+7 dB MIN, 15 dB MAX	14.0/12.0 db	PMI QA3
14	SW Frequency Flatness:	±1.2 dB MAX	+/- 1.0 db	
15	SW 1 dB Compression Point:	+3 dBm MIN	3.53 dBm	
16	SW Second Harmonic:	-9 dBc MIN	-35 dBc	
17	SW Third Harmonic:	-12 dBc MIN	-37 dBc	
18	VIDEO OUT TSS:	-71 dBm MAX	-71 dBm	
19	VIDEO OUT Dynamic Range:	-65 to 0 dBm	-65 to 0 dBm	
20	VIDEO OUT Log Slope Fixed:	70 ± 3mV/dB	70.3 mV/dB	
21	VIDEO OUT Log Linearity:	±0.75 dB MAX @ 4 GHZ	.27/- .4	
22	VIDEO OUT Log Accuracy:	±1.25 dB MAX	.89/-1.0 db	
23	VIDEO OUT Absolute Log Accuracy:	±1.5 dB MAX	1.25/-1.25 db	
24	VIDEO OUT DC Offset:	0 ±70 mV (RF Input Terminated & DC Power On)	5 mv	
25	VIDEO OUT Rise Time (10% to 90%):	25 ns TYP 28 ns MAX	24.0 ns	
26	VIDEO OUT Fall Time (90% to 10%):	300 ns MAX	150 ns	
27	VIDEO OUT Settling Time:	50 ns With in ±70 mV of final value, MAX	40ns	
28	VIDEO OUT Recovery Time:	0.5 us MAX to within 1 dB of baseline	.45 us	



**Summary Data
For
EWDM-2G6G-65-70MV-1**

29	VIDEO OUT Video Frequency Flatness:	± 1.0 dB MAX	.85 db	PMI QA3
30	VIDEO OUT CW Immunity:	A. CW Immune Power TSS to -40 dBm Baseline Shift: 200 mV MAX	96 mV	
		B. Pulse Peak Amplitude Loss; 2 dB MAX	1 dB	
		CW Immunity Time at CW = -40 dBm, ≤ 4 ms	2.6 ms	
		CW Recovery Time at CW = -40 dBm, ≤ 50 us	40 us	
31	VIDEO OUT Pulse Response, input Signal:	100 ns to 300 us	100 ns to 300 us	
32	VIDEO OUT load Impedance:	$75 \pm 1 \Omega$	75 Ω	
33	VIDEO OUT Video Output driver capability	150 ft. RG11 into 75 ohm load	PASS	
34	Pulse density capability:	10% duty cycle 100ns; 70% duty cycle 300us at peak power -10 dBm with 1 dB variable for pulse amplitude and baseline	PASS	
35	VIDEO OUT Noise Level (Vp-p):	150 mV TYP	100 mv	



Summary Data
For
EWDM-2G6G-65-70MV-1

36	Droop of the Output Video Pulse @ 300us & - 65 dBm	70mV (1 dB) MAX	40mv	PMI QA3
37	VIDEO OUT Propagation Delay:	50 ns MAX Excluding cable	40 ns	
38	Power Supply	+15 V @ 1000 mA MAX -15 V @ 500 mA MAX	+15 V @ 630 mA -15 V @ 140 mA	
39	Power Supply Ripple From DC to 10 MHz	100 mV MAX	PASS	

QA/QC Approval:

K. Luter

Date:


6-14-24

PL35781 Recovery

W 100ps P 300ps

DSO-X 3034A, MW52394003: Tue Jun 11 09:54:37 2024

1 2 800V/ 3 1.902V 500.0V/ Auto f E 2.42V

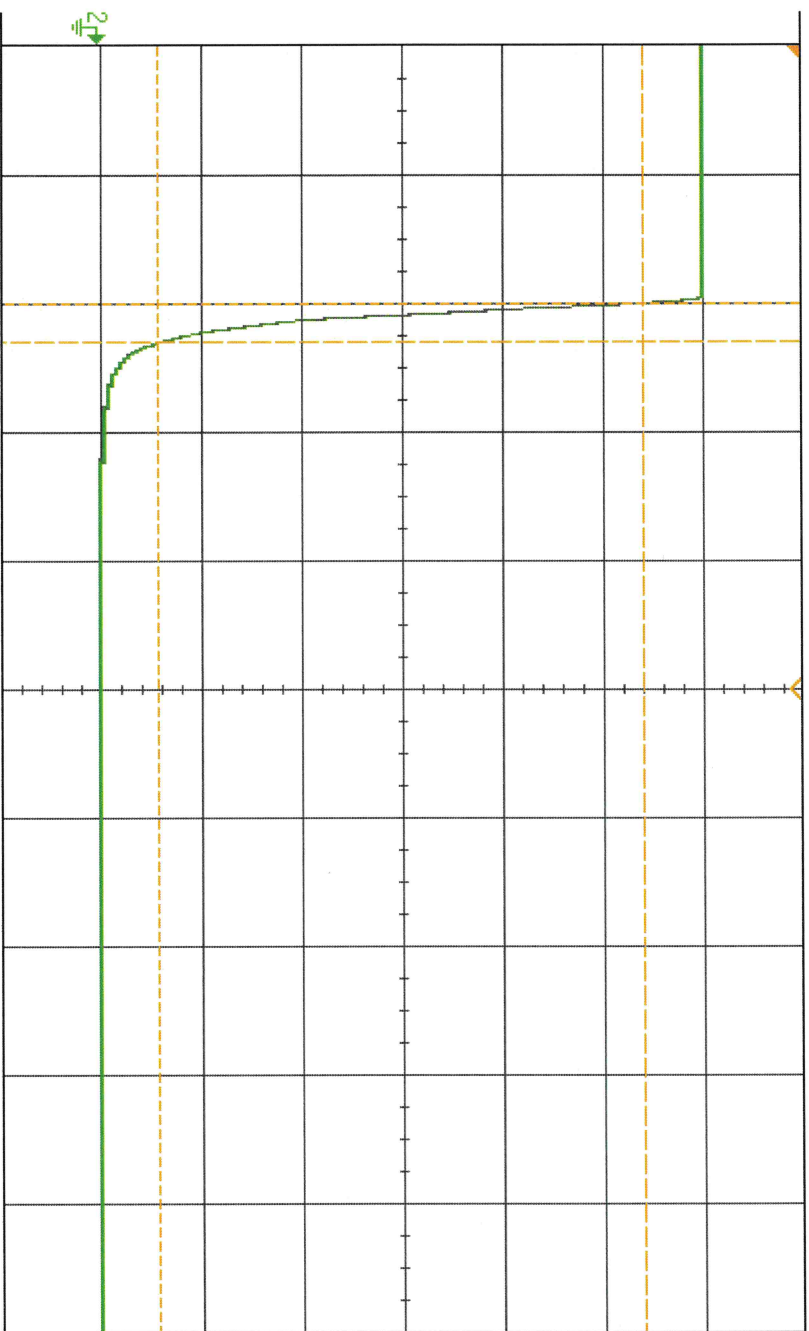

Measurement Menu

- Source 2
- Type: Fall
- Add Measurement
- Settings
- Clear Meas
- Statistics

KEYSIGHT TECHNOLOGIES	
Acquisition	
Averaging: 256	
4.00GSa/s	
Channels	
DC	1.00:1
DC	1.00:1
DC	1.00:1
Measurements	
AC RMS - FS(2):	1.9307V
Rise(2):	No edges
Fall(2):	150.0ns

PL35781 Recovery

W 10ps P 50ps

