Summary Data
For
EWDM-2G6G-65-70MV-1

Customer: [redacted]
SO No: [redacted]
Model No: EWDM-2G6G-65-70MV-1
Serial No: PL42355/2431

Tested By: Joshua Monley
Temperature: 0°C TO +85°C
Date 7/29/2024
Drawing No: 27637945 **Rev:** A1

TEST ITEM NO	PARAMETERS	SPECIFIED VALUE	TEST RESULTS	QA QC
1	Frequency Range:	2 to 6 GHz	**2 to 6 GHz**	PMI QA3
2	VSWR:	2.0:1 MAX @ 50 Ω	**1.19:1 @ 50 Ω (RF IN)** **1.22:1 @ 50 Ω (BIT IN)** **1.16:1 @ 50 Ω (RF OUT)** **1.54:1 @ 50 Ω (SW OUT)**	
3	Noise Figure:	6 dB MAX	**4.4 dB**	
4	Input Power:	(1) 1 W CW, Max. (2) 100 W Peak @ PW = 1 us & Duty Cycle = 1%, Max.	**PASS**	
5	TTL Control	See Logic Table	**PASS**	
6	SP3T Switch Isolation	60 dB MIN (All Ports)	**> 60 dB**	
7	SP3T Switching Speed:	100 ns MAX	**50 ns**	
8	RF OUT Linear Gain	+33 dB MIN, 39 dB MAX	**+37.548 dB MAX** **+34.917 dB MIN**	
9	RF OUT Frequency Flatness:	±2.0 dB MAX	**±1.3 dB**	
10	RF OUT 1 dB Compression Point:	+3 dBm MIN	**+10.85 dBm**	
11	RF OUT Second Harmonic:	-9 dBc MIN	**-25 dBc**	
12	RF OUT Third Harmonic:	-12 dBc MIN	**-43 dBc**	

7311-F Grove Road Frederick, MD 21704 USA
Phone: (301)662-5019 Fax: (301)662-1731
Website: www.pmi-rf.com Email: sales@pmi-rf.com

Summary Data
For
EWDM-2G6G-65-70MV-1

13	SW Linear Gain	+7 dB MIN, 15 dB MAX	**+13.967 dB MAX +11.682 dB MIN**	PMI QA3
14	SW Frequency Flatness:	±1.2 dB MAX	**±1.1 dB**	
15	SW 1 dB Compression Point:	+3 dBm MIN	**+7.35 dBm**	
16	SW Second Harmonic:	-9 dBc MIN	**-19 dBc**	
17	SW Third Harmonic:	-12 dBc MIN	**-33 dBc**	
18	VIDEO OUT TSS:	-71 dBm MAX	**-71 dBm**	
19	VIDEO OUT Dynamic Range:	-65 to 0 dBm	**-65 to 0 dBm**	
20	VIDEO OUT Log Slope Fixed:	70 ± 3mV/dB	**68.8 mV/dB**	
21	VIDEO OUT Log Linearity:	±0.75 dB MAX @ 4 GHZ	**±0.35 dB**	
22	VIDEO OUT Log Accuracy:	±1.25 dB MAX	**±1.03 dB**	
23	VIDEO OUT Absolute Log Accuracy:	±1.5 dB MAX	**±1.42 dB**	
24	VIDEO OUT DC Offset:	0 ±70 mV (RF Input Terminated & DC Power On)	**-25 mV**	
25	VIDEO OUT Rise Time (10% to 90%):	25 ns TYP 28 ns MAX	**27.3 ns**	
26	VIDEO OUT Fall Time (90% to 10%):	300 ns MAX	**135.9 ns**	
27	VIDEO OUT Settling Time:	50 ns With in ±70 mV of final value, MAX	**< 50 ns**	
28	VIDEO OUT Recovery Time:	0.5 us MAX to within 1 dB of baseline	**0.426 us**	

7311-F Grove Road Frederick, MD 21704 USA
Phone: (301)662-5019 Fax: (301)662-1731
Website: www.pmi-rf.com Email: sales@pmi-rf.com

Summary Data
For
EWDM-2G6G-65-70MV-1

29	VIDEO OUT Video Frequency Flatness:	±1.0 dB MAX	**±0.94 dB**	PMI QA3
30	VIDEO OUT CW Immunity:	A. CW Immune Power TSS to -40 dBm Baseline Shift: 200 mV MAX	**< 200 mV**	
		B. Pulse Peak Amplitude Loss; 2 dB MAX	**< 2 dB**	
		CW Immunity Time at CW = -40 dBm, ≤ 4 ms	**1.54 ms**	
		CW Recovery Time at CW = -40 dBm, ≤ 50 us	**< 50 us**	
31	VIDEO OUT Pulse Response, input Signal:	100 ns to 300 us	**100 ns to 300 us**	
32	VIDEO OUT load Impedance:	75 ±1 Ω	**75 Ω**	
33	VIDEO OUT Video Output driver capability	150 ft. RG11 into 75 ohm load	**PASS**	
34	Pulse density capability:	10% duty cycle 100ns; 70% duty cycle 300us at peak power -10 dBm with 1 dB variable for pulse amplitude and baseline	**PASS**	
35	VIDEO OUT Noise Level (Vp-p):	150 mV TYP	**< 150 mV**	

7311-F Grove Road Frederick, MD 21704 USA
Phone: (301)662-5019 Fax: (301)662-1731
Website: www.pmi-rf.com Email: sales@pmi-rf.com

Summary Data
For
EWDM-2G6G-65-70MV-1

36	Droop of the Output Video Pulse @ 300us & -65 dBm	70mV (1 dB) MAX	**< 70 mV**	PMI QA3
37	VIDEO OUT Propagation Delay:	50 ns MAX Excluding cable	**40 ns**	
38	Power Supply	+15 V @ 1000 mA MAX -15 V @ 500 mA MAX	**+15 V @ 626 mA** **-15 V @ 134 mA**	
39	Power Supply Ripple From DC to 10 MHz	100 mV MAX	**PASS**	

QA/QC Approval: K. Mtn **Date:** 7.30.24

7311-F Grove Road Frederick, MD 21704 USA
Phone: (301)662-5019 Fax: (301)662-1731
Website: www.pmi-rf.com Email: sales@pmi-rf.com

Summary Data
For
EWDM-2G6G-65-70MV-1

Model: EWDM-2G6G-65-70MV-1
Serial No: PL42355
Date:07/29/2024
Tested By: F. Cortes
Test Temp: +25°C
Input Port: RF Port

DC Offset: -25 mV

Frequency			-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0	RF Input Power (dBm)
2 GHz	INTERCEPT (mV)	4813	327	682	1033	1380	1745	2069	2395	2717	3058	3420	3793	4144	4493	4801	Measured Value (mV)
	SLOPE (mV/dB)	68.9	-11	0	7	9	30	10	-8	-31	-34	-16	13	19	24	-12	ERROR (mV)
	MAX LIN ERROR	0.49	-0.16	0.00	0.10	0.14	0.44	0.14	-0.12	-0.44	-0.49	-0.23	0.18	0.28	0.35	-0.18	LINEARITY ERROR (dB)
	MAX ACC ERROR	0.79	0.55	0.60	0.59	0.53	0.73	0.34	-0.02	-0.44	-0.59	-0.44	-0.13	-0.14	-0.17	-0.79	LOG ACCURACY (dB)
3 GHz	INTERCEPT (mV)	4902	341	697	1052	1398	1763	2091	2443	2806	3136	3500	3866	4198	4556	4897	Measured Value (mV)
	SLOPE (mV/dB)	70.1	-6	0	4	0	15	-8	-6	6	-14	-1	15	-4	4	-5	ERROR (mV)
	MAX LIN ERROR	0.21	-0.08	0.00	0.06	0.00	0.21	-0.11	-0.09	0.09	-0.20	-0.01	0.21	-0.05	0.06	-0.08	LINEARITY ERROR (dB)
	MAX ACC ERROR	0.98	0.75	0.81	0.86	0.79	0.98	0.65	0.66	0.82	0.52	0.70	0.91	0.63	0.73	0.58	LOG ACCURACY (dB)
4 GHz	INTERCEPT (mV)	4873	275	628	971	1324	1691	2026	2393	2774	3113	3465	3816	4155	4500	4879	Measured Value (mV)
	SLOPE (mV/dB)	70.8	4	3	-8	-9	4	-15	-2	25	10	8	5	-10	-19	6	Error (mV)
	MAX LIN ERROR	0.36	0.05	0.04	-0.12	-0.13	0.05	-0.21	-0.03	0.35	0.14	0.11	0.07	-0.14	-0.27	0.09	LINEARITY ERROR (dB)
	MAX ACC ERROR	0.37	-0.19	-0.17	-0.29	-0.26	-0.04	-0.28	-0.05	0.37	0.19	0.20	0.20	0.02	-0.07	0.32	LOG ACCURACY (dB)
5 GHz	INTERCEPT (mV)	4857	262	613	956	1310	1674	2016	2383	2760	3100	3449	3796	4137	4483	4866	Measured Value (mV)
	SLOPE (mV/dB)	70.8	4	1	-10	-9	1	-11	2	26	12	7	0	-12	-20	9	ERROR (mV)
	MAX LIN ERROR	0.36	0.05	0.02	-0.14	-0.13	0.01	-0.15	0.03	0.36	0.17	0.10	0.01	-0.18	-0.28	0.13	LINEARITY ERROR (dB)
	MAX ACC ERROR	0.5	-0.38	-0.38	-0.50	-0.46	-0.28	-0.42	-0.19	0.17	0.01	-0.03	-0.09	-0.24	-0.31	0.14	LOG ACCURACY (dB)
6 GHz	INTERCEPT (mV)	4835	236	589	927	1283	1644	1987	2350	2728	3073	3416	3763	4117	4467	4854	Measured Value (mV)
	SLOPE (mV/dB)	70.9	9	7	-9	-8	-1	-12	-4	20	10	-1	-8	-9	-13	19	Error (mV)
	MAX LIN ERROR	0.28	0.12	0.10	-0.13	-0.11	-0.01	-0.17	-0.05	0.28	0.15	-0.01	-0.12	-0.12	-0.19	0.27	LINEARITY ERROR (dB)
	MAX ACC ERROR	0.91	-0.75	-0.72	-0.91	-0.85	-0.71	-0.83	-0.66	-0.29	-0.38	-0.50	-0.56	-0.52	-0.54	-0.03	LOG ACCURACY (dB)
	AVG. SLOPE: 70.3 mV/dB		0.75	0.77	0.89	0.82	0.85	0.74	0.66	0.63	0.55	0.60	0.73	0.58	0.63	0.68	Flatness dB: ±0.89 dB

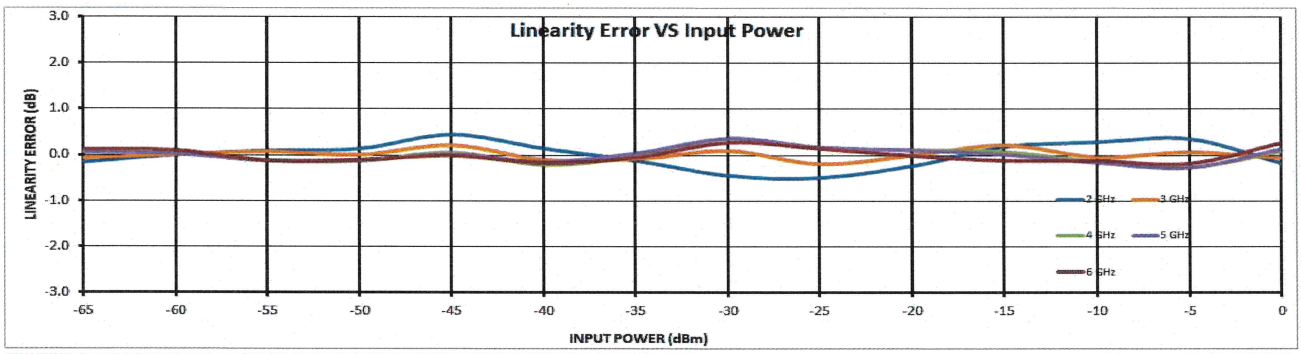

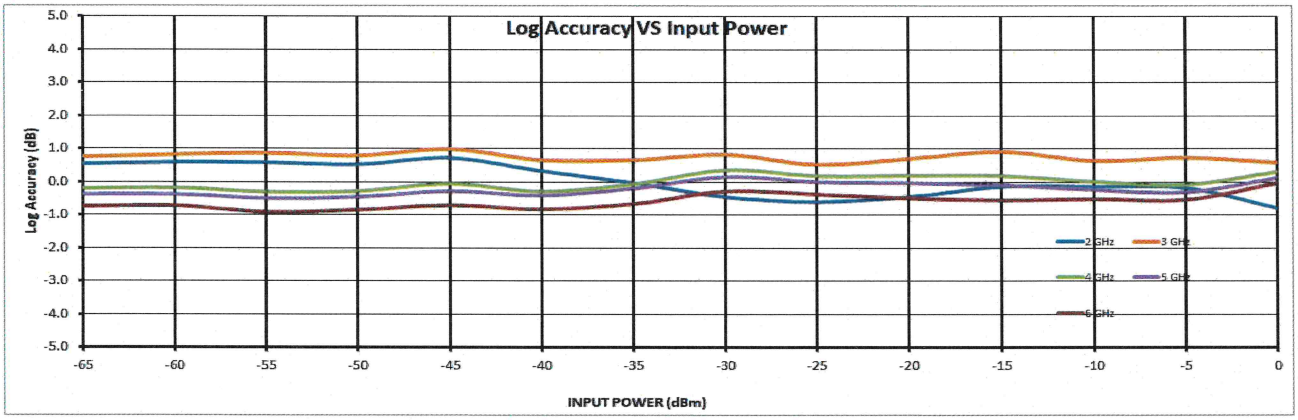

7311-F Grove Road Frederick, MD 21704 USA
Phone: (301)662-5019 Fax: (301)662-1731
Website: www.pmi-rf.com Email: sales@pmi-rf.com

Summary Data
For
EWDM-2G6G-65-70MV-1

Model: EWDM-2G6G-65-70MV-1
Serial No: PL42355
Date:: 07/29/2024
Tested By: F. Cortes
Test Temp: +25°C
Input Port: BIT Port

DC Offset: -22 mV

Frequency			-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0	RF Input Power (dBm)
2 GHz	INTERCEPT (mV)	4813	329	684	1035	1381	1746	2071	2398	2719	3061	3422	3795	4146	4490	4797	Measured Value (mV)
	SLOPE (mV/dB)	68.8	-12	-1	6	8	29	10	-7	-30	-32	-15	14	21	21	-16	ERROR (mV)
	MAX LIN ERROR	0.46	-0.17	-0.01	0.09	0.12	0.43	0.15	-0.10	-0.43	-0.46	-0.21	0.21	0.31	0.31	-0.23	LINEARITY ERROR (dB)
	MAX ACC ERROR	0.80	0.63	0.69	0.68	0.60	0.80	0.42	0.08	-0.36	-0.49	-0.35	-0.04	-0.05	-0.15	-0.78	LOG ACCURACY (dB)
3 GHz	INTERCEPT (mV)	4898	336	694	1047	1393	1758	2088	2439	2802	3133	3496	3862	4195	4551	4892	Measured Value (mV)
	SLOPE (mV/dB)	70.1	-6	1	4	-1	14	-7	-6	6	-13	-1	15	-2	3	-6	ERROR (mV)
	MAX LIN ERROR	0.21	-0.09	0.02	0.05	-0.01	0.20	-0.10	-0.09	0.09	-0.19	-0.01	0.21	-0.04	0.04	-0.09	LINEARITY ERROR (dB)
	MAX ACC ERROR	0.97	0.73	0.83	0.85	0.77	0.97	0.67	0.66	0.83	0.54	0.70	0.91	0.65	0.72	0.57	LOG ACCURACY (dB)
4 GHz	INTERCEPT (mV)	4875	274	626	970	1324	1690	2025	2393	2774	3113	3466	3817	4156	4501	4881	Measured Value (mV)
	SLOPE (mV/dB)	70.8	4	2	-8	-8	3	-16	-2	25	10	8	5	-10	-19	6	Error (mV)
	MAX LIN ERROR	0.36	0.06	0.03	-0.12	-0.12	0.05	-0.22	-0.03	0.35	0.13	0.12	0.07	-0.14	-0.27	0.09	LINEARITY ERROR (dB)
	MAX ACC ERROR	0.43	-0.15	-0.14	-0.24	-0.21	0.00	-0.23	0.01	0.43	0.25	0.27	0.27	0.09	0.00	0.41	LOG ACCURACY (dB)
5 GHz	INTERCEPT (mV)	4848	253	605	945	1302	1665	2008	2374	2750	3094	3441	3788	4129	4473	4855	Measured Value (mV)
	SLOPE (mV/dB)	70.7	4	2	-12	-9	1	-10	2	24	15	8	1	-11	-21	7	ERROR (mV)
	MAX LIN ERROR	0.35	0.05	0.03	-0.17	-0.12	0.01	-0.14	0.03	0.35	0.21	0.11	0.02	-0.16	-0.30	0.10	LINEARITY ERROR (dB)
	MAX ACC ERROR	0.6	-0.45	-0.44	-0.60	-0.52	-0.35	-0.47	-0.26	0.09	-0.02	-0.08	-0.14	-0.29	-0.39	0.04	LOG ACCURACY (dB)
6 GHz	INTERCEPT (mV)	4825	233	579	915	1274	1632	1978	2339	2717	3066	3406	3753	4111	4458	4844	Measured Value (mV)
	SLOPE (mV/dB)	70.9	15	6	-12	-7	-4	-12	-6	18	13	-2	-9	-5	-13	19	Error (mV)
	MAX LIN ERROR	0.26	0.21	0.09	-0.17	-0.11	-0.05	-0.17	-0.08	0.25	0.18	-0.02	-0.13	-0.08	-0.18	0.26	LINEARITY ERROR (dB)
	MAX ACC ERROR	1.03	-0.73	-0.81	-1.03	-0.92	-0.82	-0.90	-0.76	-0.38	-0.42	-0.58	-0.64	-0.55	-0.61	-0.12	LOG ACCURACY (dB)
	AVG. SLOPE: 70.3 mV/dB		0.73	0.82	0.94	0.85	0.90	0.78	0.71	0.60	0.51	0.64	0.78	0.60	0.66	0.68	Flatness dB: ±0.94 dB

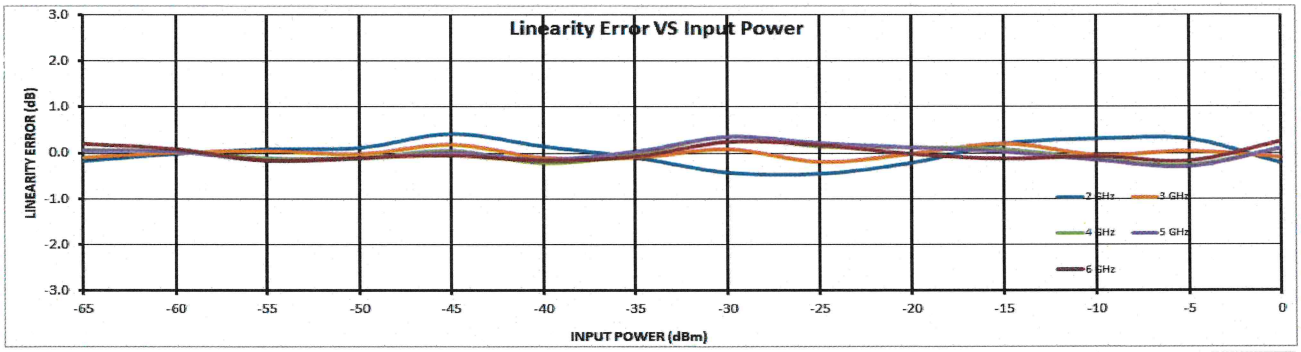

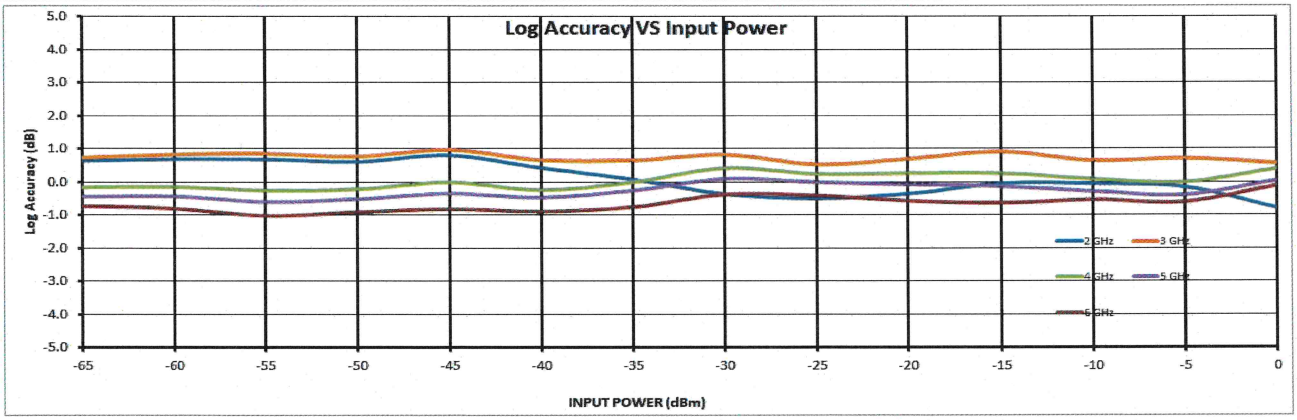

7311-F Grove Road Frederick, MD 21704 USA
Phone: (301)662-5019 Fax: (301)662-1731
Website: www.pmi-rf.com Email: sales@pmi-rf.com

Summary Data
For
EWDM-2G6G-65-70MV-1

Model: EWDM-2G6G-65-70MV-1
Serial No: PL42355
Date:: 7/17/2024
Tested By: F. Cortes
Test Temp: 0°C
Input Port: RF Port

DC Offset: -23 mV

Frequency			-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0	RF Input Power (dBm)
2 GHz	INTERCEPT (mV)	4889	350	701	1059	1411	1779	2106	2434	2760	3107	3474	3851	4203	4567	4891	Measured Value (mV)
	SLOPE (mV/dB)	69.8	-3	-1	8	11	30	8	-12	-35	-37	-19	9	12	27	2	ERROR (mV)
	MAX LIN ERROR	0.53	-0.05	-0.02	0.11	0.16	0.43	0.12	-0.18	-0.51	-0.53	-0.27	0.13	0.17	0.39	0.03	LINEARITY ERROR (dB)
	MAX ACC ERROR	0.71	0.45	0.40	0.44	0.40	0.58	0.19	-0.19	-0.60	-0.71	-0.54	-0.23	-0.27	-0.14	-0.58	LOG ACCURACY (dB)
3 GHz	INTERCEPT (mV)	4970	371	719	1079	1430	1799	2131	2484	2851	3184	3551	3922	4255	4617	4975	Measured Value (mV)
	SLOPE (mV/dB)	70.8	2	-3	3	0	15	-7	-8	5	-16	-3	14	-7	1	5	ERROR (mV)
	MAX LIN ERROR	0.23	0.04	-0.05	0.04	0.00	0.21	-0.10	-0.12	0.07	-0.23	-0.04	0.20	-0.10	0.02	0.07	LINEARITY ERROR (dB)
	MAX ACC ERROR	0.86	0.75	0.65	0.72	0.67	0.86	0.54	0.51	0.69	0.38	0.55	0.77	0.46	0.56	0.61	LOG ACCURACY (dB)
4 GHz	INTERCEPT (mV)	4936	298	651	999	1356	1729	2066	2435	2817	3160	3516	3871	4210	4558	4945	Measured Value (mV)
	SLOPE (mV/dB)	71.4	4	0	-9	-9	7	-13	-2	23	9	8	6	-12	-21	9	Error (mV)
	MAX LIN ERROR	0.33	0.06	0.00	-0.13	-0.13	0.09	-0.19	-0.02	0.33	0.13	0.11	0.08	-0.17	-0.30	0.12	LINEARITY ERROR (dB)
	MAX ACC ERROR	0.41	-0.28	-0.31	-0.41	-0.38	-0.12	-0.37	-0.18	0.21	0.04	0.05	0.05	-0.17	-0.27	0.19	LOG ACCURACY (dB)
5 GHz	INTERCEPT (mV)	4920	286	636	980	1339	1712	2053	2424	2802	3145	3498	3849	4192	4542	4935	Measured Value (mV)
	SLOPE (mV/dB)	71.4	7	0	-13	-11	5	-11	3	24	10	6	0	-14	-21	15	ERROR (mV)
	MAX LIN ERROR	0.34	0.10	0.01	-0.18	-0.15	0.07	-0.15	0.04	0.34	0.14	0.08	0.00	-0.20	-0.30	0.20	LINEARITY ERROR (dB)
	MAX ACC ERROR	0.67	-0.45	-0.52	-0.67	-0.62	-0.36	-0.56	-0.33	-0.01	-0.17	-0.20	-0.25	-0.42	-0.49	0.04	LOG ACCURACY (dB)
6 GHz	INTERCEPT (mV)	4900	265	614	956	1313	1685	2028	2393	2772	3120	3488	3818	4173	4527	4925	Measured Value (mV)
	SLOPE (mV/dB)	71.5	14	5	-11	-11	3	-11	-4	18	8	-1	-9	-11	-15	25	Error (mV)
	MAX LIN ERROR	0.36	0.19	0.07	-0.15	-0.16	0.05	-0.16	-0.05	0.25	0.11	-0.02	-0.12	-0.16	-0.21	0.36	LINEARITY ERROR (dB)
	MAX ACC ERROR	1.01	-0.75	-0.83	-1.01	-0.98	-0.74	-0.91	-0.77	-0.43	-0.53	-0.62	-0.69	-0.69	-0.70	-0.10	LOG ACCURACY (dB)
	AVG. SLOPE: 71 mV/dB		0.75	0.74	0.87	0.82	0.80	0.73	0.64	0.64	0.54	0.58	0.73	0.58	0.63	0.59	Flatness dB: ±0.87 dB

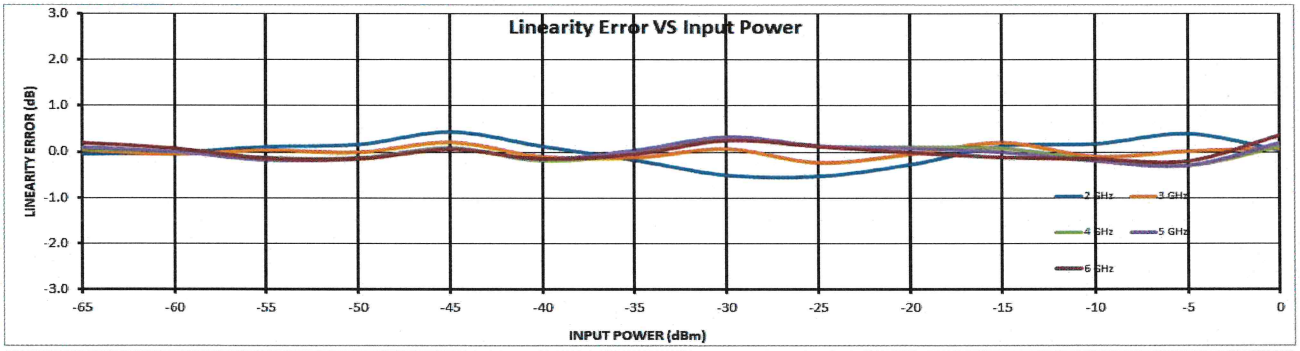

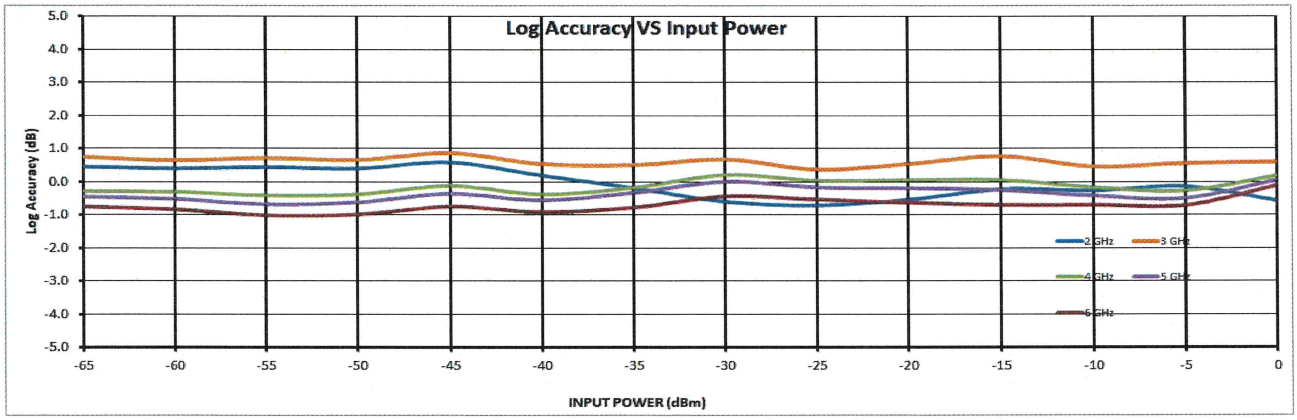

7311-F Grove Road Frederick, MD 21704 USA
Phone: (301)662-5019 Fax: (301)662-1731
Website: www.pmi-rf.com Email: sales@pmi-rf.com

Summary Data
For
EWDM-2G6G-65-70MV-1

Model: EWDM-2G6G-65-70MV-1
Serial No: PL42355
Date:: 7/17/2024
Tested By: F. Cortes
Test Temp: +85°C
Input Port: RF Port

DC Offset: -26 mV

Frequency			-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0	RF Input Power (dBm)
2 GHz	INTERCEPT (mV)	4579	212	562	901	1246	1596	1927	2253	2571	2897	3235	3594	3940	4245	4537	Measured Value (mV)
	SLOPE (mV/dB)	66.8	-26	-10	-5	7	23	20	12	-4	-12	-8	17	29	0	-42	ERROR (mV)
	MAX LIN ERROR	0.63	-0.38	-0.14	-0.07	0.10	0.34	0.29	0.18	-0.06	-0.18	-0.12	0.25	0.43	0.00	-0.63	LINEARITY ERROR (dB)
	MAX ACC ERROR	1.42	0.47	0.57	0.52	0.56	0.66	0.49	0.25	-0.11	-0.35	-0.42	-0.18	-0.13	-0.68	-1.42	LOG ACCURACY (dB)
3 GHz	INTERCEPT (mV)	4681	232	594	930	1273	1625	1959	2307	2660	2977	3320	3673	4007	4341	4643	Measured Value (mV)
	SLOPE (mV/dB)	68.1	-22	0	-5	-2	9	3	10	23	-1	1	14	7	1	-38	ERROR (mV)
	MAX LIN ERROR	0.55	-0.32	-0.01	-0.07	-0.04	0.13	0.04	0.15	0.33	-0.01	0.02	0.21	0.11	0.01	-0.55	LINEARITY ERROR (dB)
	MAX ACC ERROR	1.19	0.76	1.04	0.95	0.95	1.09	0.96	1.04	1.19	0.82	0.82	0.98	0.85	0.72	0.13	LOG ACCURACY (dB)
4 GHz	INTERCEPT (mV)	4653	159	483	829	1179	1524	1871	2229	2614	2946	3276	3614	3955	4290	4639	Measured Value (mV)
	SLOPE (mV/dB)	69.3	11	-12	-12	-9	-10	-10	2	40	26	9	1	-5	-16	-14	Error (mV)
	MAX LIN ERROR	0.58	0.16	-0.17	-0.18	-0.13	-0.15	-0.14	0.02	0.58	0.37	0.13	0.01	-0.07	-0.24	-0.20	LINEARITY ERROR (dB)
	MAX ACC ERROR	0.58	-0.31	-0.58	-0.53	-0.42	-0.39	-0.32	-0.10	0.52	0.37	0.18	0.11	0.09	-0.02	0.07	LOG ACCURACY (dB)
5 GHz	INTERCEPT (mV)	4638	154	480	825	1175	1519	1871	2229	2604	2935	3262	3597	3942	4275	4626	Measured Value (mV)
	SLOPE (mV/dB)	69.1	7	-13	-13	-8	-10	-3	9	39	24	6	-4	-5	-17	-12	ERROR (mV)
	MAX LIN ERROR	0.56	0.10	-0.18	-0.19	-0.12	-0.14	-0.05	0.13	0.56	0.35	0.09	-0.06	-0.07	-0.25	-0.17	LINEARITY ERROR (dB)
	MAX ACC ERROR	0.62	-0.38	-0.62	-0.59	-0.48	-0.46	-0.32	-0.10	0.37	0.21	-0.02	-0.13	-0.10	-0.24	-0.12	LOG ACCURACY (dB)
6 GHz	INTERCEPT (mV)	4610	128	433	788	1135	1473	1830	2182	2562	2902	3222	3558	3915	4251	4612	Measured Value (mV)
	SLOPE (mV/dB)	69.3	25	-17	-8	-8	-17	-6	-1	32	25	-1	-12	-2	-12	2	Error (mV)
	MAX LIN ERROR	0.46	0.36	-0.24	-0.12	-0.12	-0.24	-0.09	-0.02	0.46	0.37	-0.02	-0.17	-0.02	-0.18	0.03	LINEARITY ERROR (dB)
	MAX ACC ERROR	1.31	-0.76	-1.31	-1.13	-1.06	-1.13	-0.92	-0.78	-0.24	-0.28	-0.61	-0.70	-0.49	-0.59	-0.32	LOG ACCURACY (dB)
	AVG. SLOPE: 68.5 mV/dB		0.76	1.17	1.04	1.01	1.11	0.94	0.91	0.72	0.58	0.72	0.84	0.67	0.70	0.77	Flatness dB: ±1.17 dB

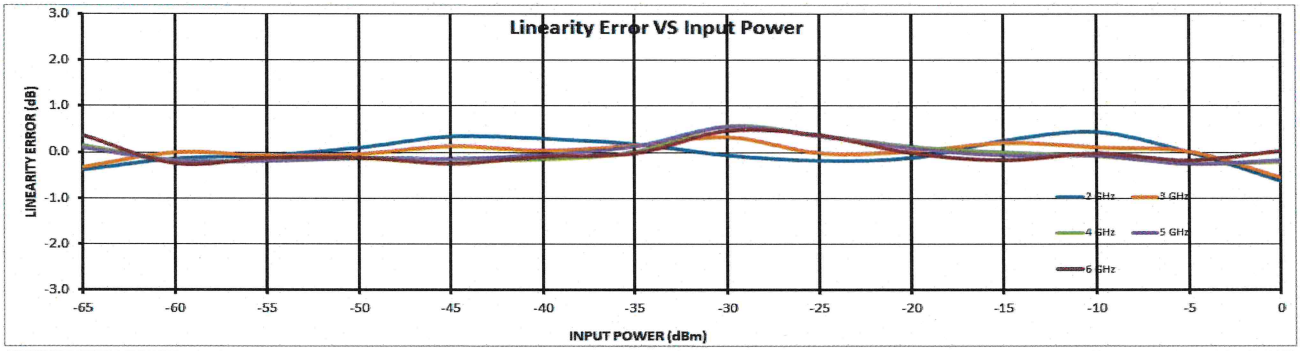

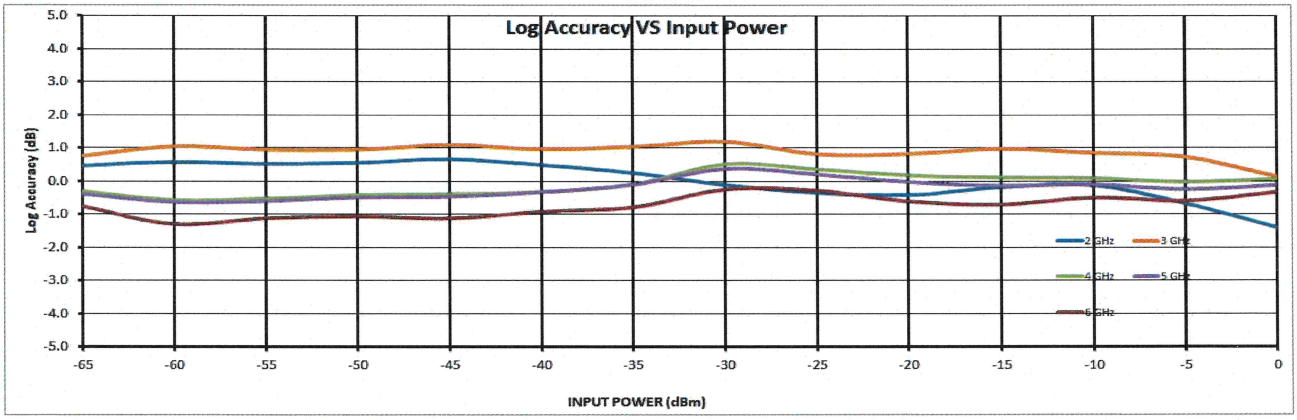

7311-F Grove Road Frederick, MD 21704 USA
Phone: (301)662-5019 Fax: (301)662-1731
Website: www.pmi-rf.com Email: sales@pmi-rf.com

Summary Data
For
EWDM-2G6G-65-70MV-1

Rise Time

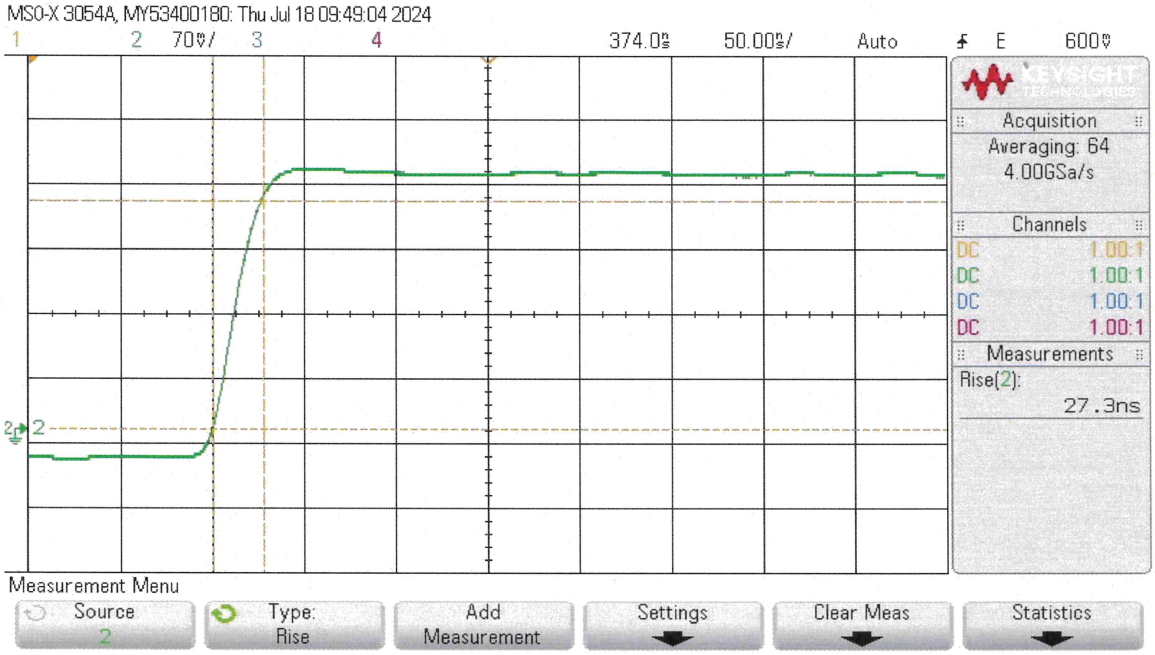

Fall and Recovery Time

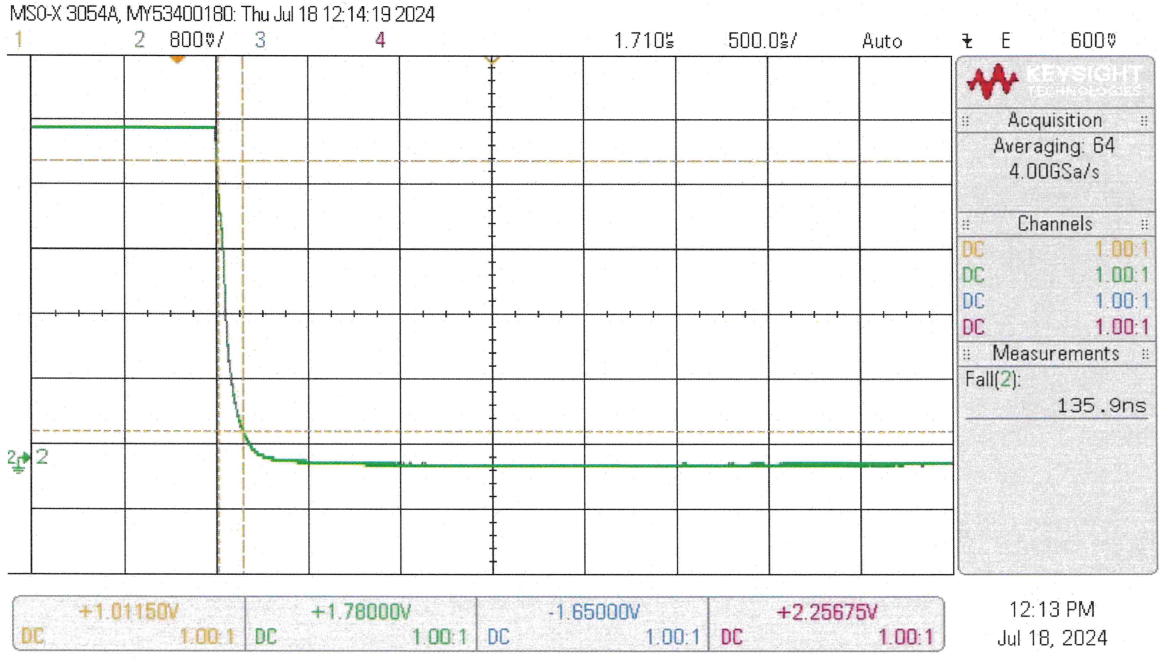

7311-F Grove Road Frederick, MD 21704 USA
Phone: (301)662-5019 Fax: (301)662-1731
Website: www.pmi-rf.com Email: sales@pmi-rf.com

Settling Time

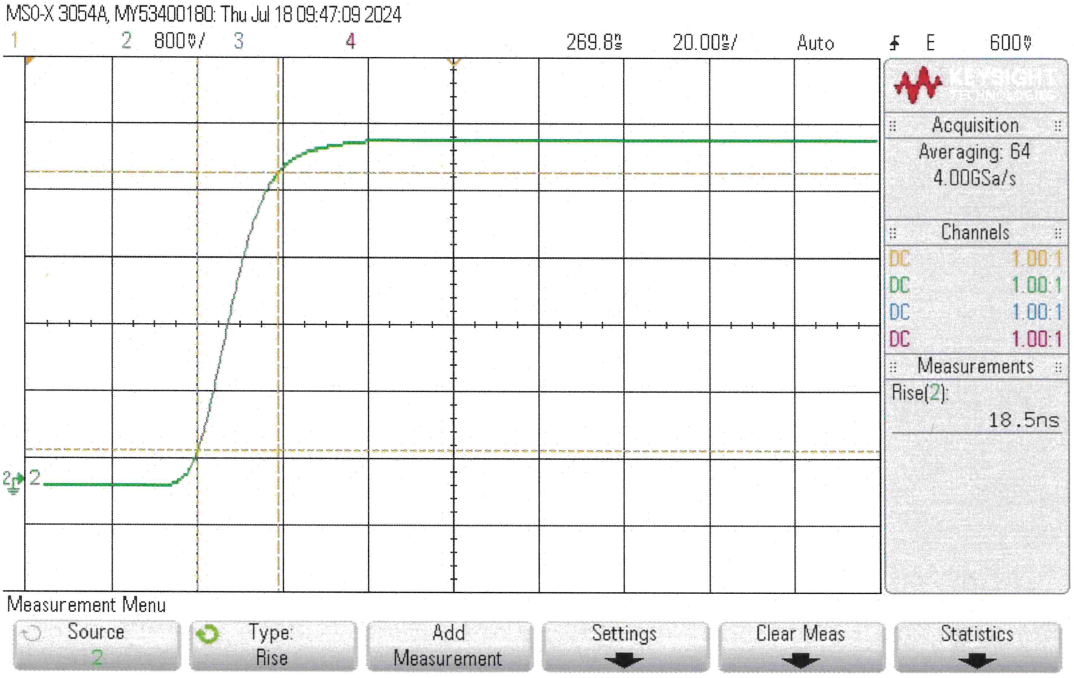

7311-F Grove Road Frederick, MD 21704 USA
Phone: (301)662-5019 Fax: (301)662-1731
Website: www.pmi-rf.com Email: sales@pmi-rf.com