



Tested By: Joshua Monley

Temperature: 0°C TO +85°C

Date 7/29/2024

Drawing No: 27637945

Rev: A1

TEST ITEM NO	PARAMETERS	SPECIFIED VALUE	TEST RESULTS	QA QC
1	Frequency Range:	2 to 6 GHz	2 to 6 GHz	PMI QA3
2	VSWR:	2.0:1 MAX @ 50 Ω	1.43:1 @ 50 Ω (RF IN) 1.34:1 @ 50 Ω (BIT IN) 1.23:1 @ 50 Ω (RF OUT) 1.42:1 @ 50 Ω (SW OUT)	
3	Noise Figure:	6 dB MAX	4.3 dB	
4	Input Power:	(1) 1 W CW, Max. (2) 100 W Peak @ PW = 1 us & Duty Cycle = 1%, Max.	PASS	
5	TTL Control	See Logic Table	PASS	
6	SP3T Switch Isolation	60 dB MIN (All Ports)	> 60 dB	
7	SP3T Switching Speed:	100 ns MAX	50 ns	
8	RF OUT Linear Gain	+33 dB MIN, 39 dB MAX	+37.3 dB MAX +35.2 dB MIN	
9	RF OUT Frequency Flatness:	±2.0 dB MAX	±1.1 dB	
10	RF OUT 1 dB Compression Point:	+3 dBm MIN	+10.61 dBm	
11	RF OUT Second Harmonic:	-9 dBc MIN	-43 dBc	
12	RF OUT Third Harmonic:	-12 dBc MIN	-53 dBc	

7311-F Grove Road Frederick, MD 21704 USA

Phone: (301)662-5019 Fax: (301)662-1731

Website: www.pmi-rf.com Email: sales@pmi-rf.com



**Summary Data
For
EWDM-2G6G-65-70MV-1**

13	SW Linear Gain	+7 dB MIN, 15 dB MAX	+13.34 dB MAX +11.23 dB MIN	PMI QA3
14	SW Frequency Flatness:	±1.2 dB MAX	±1.1 dB	
15	SW 1 dB Compression Point:	+3 dBm MIN	+7.37 dBm	
16	SW Second Harmonic:	-9 dBc MIN	-27 dBc	
17	SW Third Harmonic:	-12 dBc MIN	-47 dBc	
18	VIDEO OUT TSS:	-71 dBm MAX	-71 dBm	
19	VIDEO OUT Dynamic Range:	-65 to 0 dBm	-65 to 0 dBm	
20	VIDEO OUT Log Slope Fixed:	70 ± 3mV/dB	70.9 mV/dB	
21	VIDEO OUT Log Linearity:	±0.75 dB MAX @ 4 GHZ	±0.35 dB	
22	VIDEO OUT Log Accuracy:	±1.25 dB MAX	±1.07 dB	
23	VIDEO OUT Absolute Log Accuracy:	±1.5 dB MAX	±1.31 dB	
24	VIDEO OUT DC Offset:	0 ±70 mV (RF Input Terminated & DC Power On)	-35 mV	
25	VIDEO OUT Rise Time (10% to 90%):	25 ns TYP 28 ns MAX	26 ns	
26	VIDEO OUT Fall Time (90% to 10%):	300 ns MAX	135 ns	
27	VIDEO OUT Settling Time:	50 ns With in ±70 mV of final value, MAX	< 50 ns	
28	VIDEO OUT Recovery Time:	0.5 us MAX to within 1 dB of baseline	0.45 us	



**Summary Data
For
EWDM-2G6G-65-70MV-1**

29	VIDEO OUT Video Frequency Flatness:	± 1.0 dB MAX	± 0.85 dB	PMI QA3
30	VIDEO OUT CW Immunity:	A. CW Immune Power TSS to -40 dBm Baseline Shift: 200 mV MAX	< 200 mV	
		B. Pulse Peak Amplitude Loss; 2 dB MAX	< 2 dB	
		CW Immunity Time at CW = -40 dBm, ≤ 4 ms	1.4 ms	
		CW Recovery Time at CW = -40 dBm, ≤ 50 us	< 50 us	
31	VIDEO OUT Pulse Response, input Signal:	100 ns to 300 us	100 ns to 300 us	
32	VIDEO OUT load Impedance:	$75 \pm 1 \Omega$	75 Ω	
33	VIDEO OUT Video Output driver capability	150 ft. RG11 into 75 ohm load	PASS	
34	Pulse density capability:	10% duty cycle 100ns; 70% duty cycle 300us at peak power -10 dBm with 1 dB variable for pulse amplitude and baseline	PASS	
35	VIDEO OUT Noise Level (Vp-p):	150 mV TYP	< 150 mV	



Summary Data
For
EWDM-2G6G-65-70MV-1

36	Droop of the Output Video Pulse @ 300us & - 65 dBm	70mV (1 dB) MAX	< 70 mV	PMI QA3
37	VIDEO OUT Propagation Delay:	50 ns MAX Excluding cable	40 ns	
38	Power Supply	+15 V @ 1000 mA MAX -15 V @ 500 mA MAX	+15 V @ 630 mA -15 V @ 134 mA	
39	Power Supply Ripple From DC to 10 MHz	100 mV MAX	PASS	

QA/QC Approval:

K. Ntutu

Date:

7.30.24



Summary Data For EWDM-2G6G-65-70MV-1

Model: EWDM-2G6G-65-70MV-1
Serial No: PL42362
Date:: 07/29/2024
Tested By: F. Cortes
Test Temp: +25°C
Input Port: RF Port



DC Offset: -34 mV

Frequency

2 GHz	INTERCEPT (mV)	4818
	SLOPE (mV/dB)	69.3
	MAX LIN ERROR	0.61
	MAX ACC ERROR	0.63

3 GHz	INTERCEPT (mV)	4897
	SLOPE (mV/dB)	70.4
	MAX LIN ERROR	0.25
	MAX ACC ERROR	0.92

4 GHz	INTERCEPT (mV)	4861
	SLOPE (mV/dB)	70.5
	MAX LIN ERROR	0.31
	MAX ACC ERROR	0.5

5 GHz	INTERCEPT (mV)	4847
	SLOPE (mV/dB)	70.5
	MAX LIN ERROR	0.35
	MAX ACC ERROR	0.4

6 GHz	INTERCEPT (mV)	4824
	SLOPE (mV/dB)	70.8
	MAX LIN ERROR	0.68
	MAX ACC ERROR	0.94

-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
309	653	1007	1358	1728	2065	2395	2703	3054	3415	3769	4146	4496	4816
-3	-6	1	6	29	20	3	-36	-31	-17	-9	21	24	-2
-0.05	-0.09	0.02	0.08	0.42	0.28	0.04	-0.51	-0.45	-0.24	-0.14	0.30	0.35	-0.03
0.44	0.33	0.37	0.36	0.63	0.42	0.11	-0.51	-0.51	-0.38	-0.34	0.02	0.00	-0.45

-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
322	669	1026	1377	1749	2091	2439	2783	3127	3488	3832	4193	4550	4903
-2	-7	-1	-2	18	8	4	-4	-11	-2	-10	-1	4	6
-0.03	-0.09	-0.02	-0.03	0.25	0.11	0.06	-0.05	-0.16	-0.03	-0.14	-0.01	0.06	0.08
0.63	0.56	0.64	0.63	0.92	0.79	0.74	0.63	0.53	0.66	0.55	0.69	0.77	0.79

-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
277	623	974	1329	1700	2045	2401	2752	3097	3450	3783	4146	4497	4883
1	-6	-7	-5	13	6	9	7	0	0	-20	-9	-11	22
0.02	-0.08	-0.10	-0.07	0.19	0.08	0.13	0.10	-0.01	0.00	-0.28	-0.13	-0.16	0.31
-0.01	-0.09	-0.10	-0.05	0.23	0.13	0.20	0.19	0.10	0.12	-0.14	0.02	0.01	0.50

-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
268	614	962	1321	1690	2038	2393	2736	3081	3431	3765	4134	4492	4869
1	-6	-9	-3	14	10	12	3	-4	-7	-25	-8	-2	22
0.02	-0.07	-0.13	-0.04	0.20	0.14	0.18	0.04	-0.06	-0.09	-0.35	-0.12	-0.03	0.32
-0.14	-0.22	-0.27	-0.16	0.08	0.04	0.08	-0.04	-0.13	-0.15	-0.40	-0.15	-0.06	0.30

-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
234	575	919	1281	1646	1997	2352	2695	3047	3390	3727	4107	4474	4865
14	1	-10	-2	9	6	7	-4	-6	-17	-34	-9	4	41
0.19	0.01	-0.14	-0.02	0.13	0.09	0.10	-0.06	-0.09	-0.24	-0.49	-0.12	0.06	0.58
-0.63	-0.78	-0.88	-0.73	-0.54	-0.55	-0.50	-0.62	-0.61	-0.73	-0.94	-0.53	-0.31	0.25

AVG. SLOPE: 70.3 mV/dB

-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
0.63	0.67	0.76	0.68	0.73	0.67	0.62	0.63	0.57	0.70	0.75	0.61	0.54	0.62

RF Input Power (dBm)

Measured Value (mV)	
ERROR (mV)	
LINEARITY ERROR (dB)	
LOG ACCURACY (dB)	



Measured Value (mV)	
ERROR (mV)	
LINEARITY ERROR (dB)	
LOG ACCURACY (dB)	

Measured Value (mV)	
Error (mV)	
LINEARITY ERROR (dB)	
LOG ACCURACY (dB)	

Measured Value (mV)	
ERROR (mV)	
LINEARITY ERROR (dB)	
LOG ACCURACY (dB)	

Measured Value (mV)	
Error (mV)	
LINEARITY ERROR (dB)	
LOG ACCURACY (dB)	

Flatness dB: ±0.76 dB

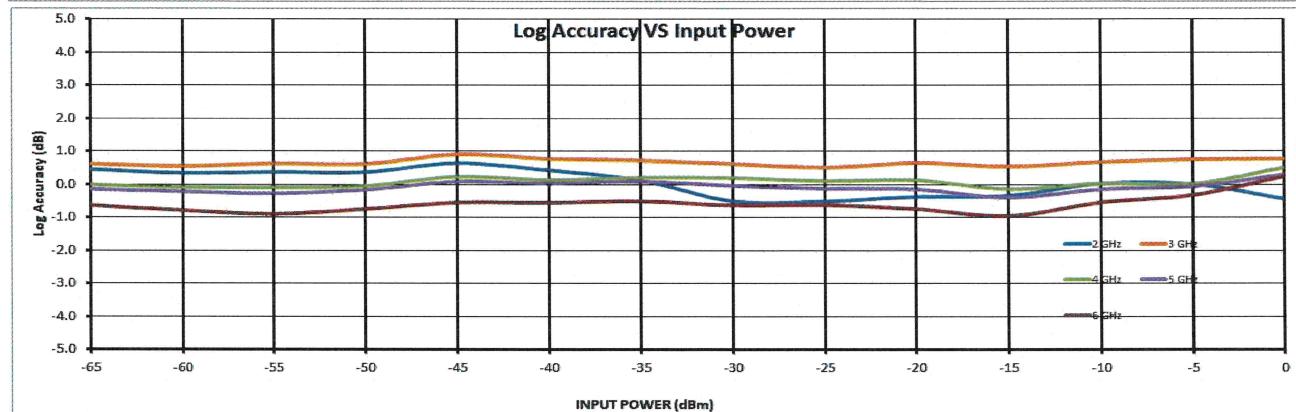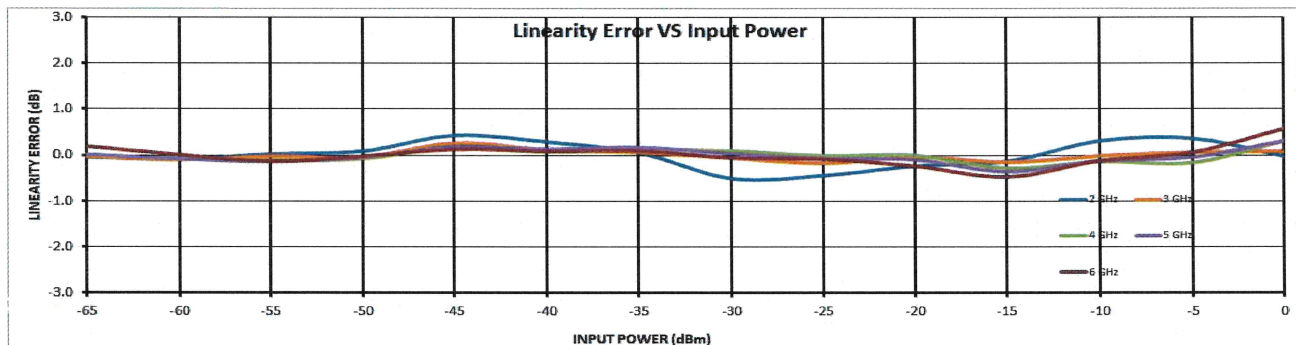



Summary Data For EWDM-2G6G-65-70MV-1

Model: EWDM-2G6G-65-70MV-1
Serial No: PL42362
Date: 07/29/2024
Tested By: F. Cortes
Test Temp: +25°C
Input Port: BIT Port

DC Offset: -35 mV



Frequency

2 GHz	INTERCEPT (mV)	4818
	SLOPE (mV/dB)	69.5
	MAX LIN ERROR	0.51
	MAX ACC ERROR	0.62

3 GHz	INTERCEPT (mV)	4888
	SLOPE (mV/dB)	70.4
	MAX LIN ERROR	0.23
	MAX ACC ERROR	0.94

4 GHz	INTERCEPT (mV)	4852
	SLOPE (mV/dB)	70.6
	MAX LIN ERROR	0.35
	MAX ACC ERROR	0.53

5 GHz	INTERCEPT (mV)	4831
	SLOPE (mV/dB)	70.5
	MAX LIN ERROR	0.39
	MAX ACC ERROR	0.5

6 GHz	INTERCEPT (mV)	4808
	SLOPE (mV/dB)	70.9
	MAX LIN ERROR	0.65
	MAX ACC ERROR	1.07

-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
295	643	997	1349	1715	2053	2384	2696	3048	3410	3763	4141	4504	4813
-3	-3	3	8	25	17	0	-36	-31	-17	-12	19	34	-5
-0.05	-0.04	0.05	0.11	0.38	0.24	0.00	-0.51	-0.45	-0.24	-0.17	0.27	0.49	-0.06
0.44	0.38	0.41	0.42	0.62	0.42	0.12	-0.45	-0.45	-0.30	-0.29	0.08	0.24	-0.37

311	661	1018	1368	1738	2080	2429	2774	3118	3479	3821	4183	4542	4895
-3	-5	0	-2	16	7	4	-3	-11	-2	-12	-2	5	7
-0.04	-0.07	0.00	-0.02	0.23	0.09	0.05	-0.04	-0.16	-0.03	-0.17	-0.02	0.08	0.09
0.67	0.64	0.71	0.69	0.94	0.80	0.76	0.66	0.55	0.68	0.54	0.68	0.78	0.80

262	611	961	1318	1687	2031	2389	2740	3087	3439	3770	4135	4488	4876
0	-4	-7	-3	13	4	9	7	1	0	-22	-10	-10	24
0.00	-0.06	-0.10	-0.04	0.18	0.05	0.12	0.10	0.01	0.00	-0.32	-0.15	-0.15	0.35
-0.03	-0.07	-0.10	-0.02	0.22	0.11	0.19	0.18	0.11	0.11	-0.19	0.00	0.01	0.53

250	598	944	1304	1670	2020	2374	2719	3066	3415	3748	4115	4474	4859
2	-3	-9	-2	12	9	11	3	-3	-8	-26	-11	-5	28
0.03	-0.04	-0.13	-0.03	0.17	0.13	0.15	0.04	-0.04	-0.09	-0.36	-0.16	-0.07	0.39
-0.20	-0.25	-0.34	-0.22	-0.02	-0.05	-0.02	-0.12	-0.19	-0.23	-0.50	-0.29	-0.18	0.29

217	555	898	1263	1623	1977	2331	2677	3031	3371	3708	4090	4457	4854
17	1	-10	0	6	5	5	-4	-4	-19	-36	-9	4	46
0.25	0.01	-0.15	0.00	0.08	0.07	0.06	-0.06	-0.06	-0.27	-0.51	-0.13	0.05	0.65
-0.67	-0.87	-0.99	-0.81	-0.69	-0.66	-0.63	-0.72	-0.69	-0.86	-1.07	-0.64	-0.43	0.21

AVG. SLOPE: 70.4 mV/dB

0.67	0.75	0.85	0.75	0.82	0.73	0.70	0.69	0.62	0.77	0.80	0.66	0.60	0.58
------	------	------	------	------	------	------	------	------	------	------	------	------	------

RF Input Power (dBm)

Measured Value (mV)	
ERROR (mV)	
LINEARITY ERROR (dB)	
LOG ACCURACY (dB)	



Measured Value (mV)	
ERROR (mV)	
LINEARITY ERROR (dB)	
LOG ACCURACY (dB)	

Measured Value (mV)	
ERROR (mV)	
LINEARITY ERROR (dB)	
LOG ACCURACY (dB)	

Measured Value (mV)	
ERROR (mV)	
LINEARITY ERROR (dB)	
LOG ACCURACY (dB)	

Measured Value (mV)	
ERROR (mV)	
LINEARITY ERROR (dB)	
LOG ACCURACY (dB)	

Flatness dB: ±0.85 dB

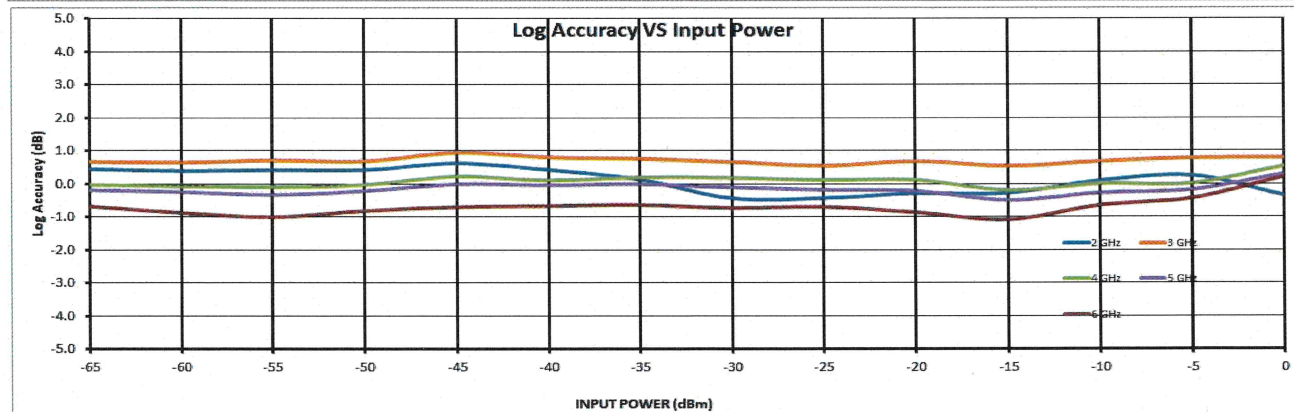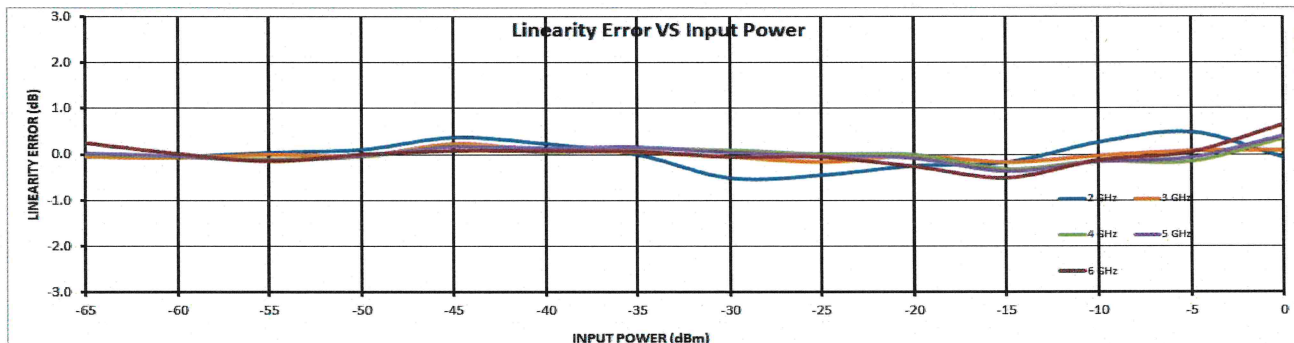



Summary Data For EWDM-2G6G-65-70MV-1

Model: EWDM-2G6G-65-70MV-1
Serial No: PL42362
Date: 07/29/2024
Tested By: J. Monley
Test Temp: 0°C
Input Port: RF Port

DC Offset: -14 mV



Frequency

2 GHz	INTERCEPT (mV)	4842
	SLOPE (mV/dB)	69.8
	MAX LIN ERROR	0.45
	MAX ACC ERROR	0.57

-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
300	655	1009	1363	1734	2067	2401	2718	3070	3427	3781	4158	4520	4847
-8	-2	3	9	31	15	0	-31	-28	-20	-15	14	27	5
-0.12	-0.03	0.05	0.12	0.44	0.22	0.01	-0.45	-0.40	-0.29	-0.21	0.19	0.38	0.07
0.18	0.21	0.23	0.25	0.50	0.22	-0.05	-0.56	-0.57	-0.51	-0.49	-0.15	-0.02	-0.39

RF Input Power (dBm)

Measured Value (mV)
ERROR (mV)
LINEARITY ERROR (dB)
LOG ACCURACY (dB)

3 GHz	INTERCEPT (mV)	4922
	SLOPE (mV/dB)	70.7
	MAX LIN ERROR	0.22
	MAX ACC ERROR	0.81

321	677	1033	1385	1756	2096	2450	2803	3146	3508	3852	4211	4568	4931
-5	-3	0	-2	16	2	3	2	-8	0	-9	-4	-1	9
-0.07	-0.04	0.00	-0.02	0.22	0.03	0.04	0.03	-0.12	0.00	-0.13	-0.06	-0.01	0.13
0.48	0.53	0.57	0.56	0.81	0.63	0.65	0.65	0.51	0.64	0.51	0.60	0.66	0.80

Measured Value (mV)
ERROR (mV)
LINEARITY ERROR (dB)
LOG ACCURACY (dB)

4 GHz	INTERCEPT (mV)	4886
	SLOPE (mV/dB)	70.7
	MAX LIN ERROR	0.32
	MAX ACC ERROR	0.49

287	639	989	1347	1717	2062	2425	2779	3120	3474	3805	4165	4518	4909
-3	-5	-8	-4	13	4	13	14	1	2	-21	-14	-15	23
-0.05	-0.07	-0.12	-0.06	0.18	0.06	0.19	0.20	0.02	0.03	-0.29	-0.20	-0.21	0.32
0.00	-0.01	-0.05	0.02	0.26	0.15	0.29	0.31	0.14	0.16	-0.15	-0.05	-0.05	0.49

Measured Value (mV)
Error (mV)
LINEARITY ERROR (dB)
LOG ACCURACY (dB)

5 GHz	INTERCEPT (mV)	4879
	SLOPE (mV/dB)	70.8
	MAX LIN ERROR	0.36
	MAX ACC ERROR	0.43

278	630	979	1339	1707	2052	2415	2767	3107	3460	3793	4160	4517	4905
-1	-3	-8	-2	12	4	13	11	-3	-4	-25	-11	-8	26
-0.02	-0.04	-0.11	-0.03	0.18	0.05	0.18	0.15	-0.04	-0.05	-0.35	-0.16	-0.12	0.36
-0.13	-0.14	-0.20	-0.09	0.12	0.01	0.15	0.14	-0.04	-0.04	-0.32	-0.12	-0.07	0.43

Measured Value (mV)
ERROR (mV)
LINEARITY ERROR (dB)
LOG ACCURACY (dB)

6 GHz	INTERCEPT (mV)	4854
	SLOPE (mV/dB)	71
	MAX LIN ERROR	0.61
	MAX ACC ERROR	0.86



253	600	943	1305	1668	2014	2380	2729	3076	3425	3755	4130	4499	4897
11	3	-9	-1	7	-2	9	3	-4	-10	-35	-15	0	43
0.15	0.04	-0.12	-0.02	0.10	-0.03	0.13	0.05	-0.06	-0.14	-0.49	-0.21	0.00	0.61
-0.48	-0.57	-0.71	-0.58	-0.43	-0.53	-0.34	-0.40	-0.48	-0.54	-0.86	-0.55	-0.32	0.32

Measured Value (mV)
Error (mV)
LINEARITY ERROR (dB)
LOG ACCURACY (dB)

AVG. SLOPE: 70.6 mV/dB

0.48	0.55	0.64	0.57	0.62	0.58	0.50	0.60	0.54	0.59	0.69	0.57	0.49	0.60
------	------	------	------	------	------	------	------	------	------	------	------	------	------

Flatness dB: ±0.69 dB

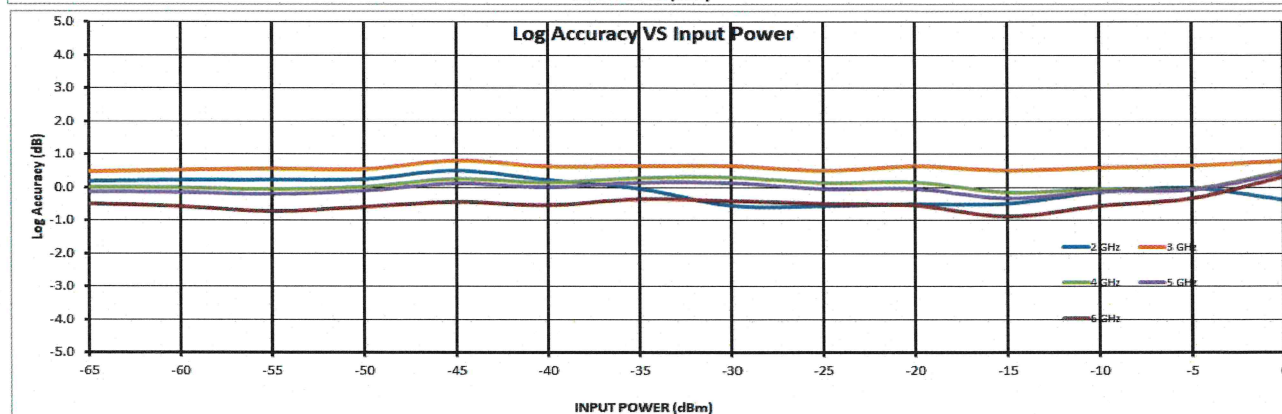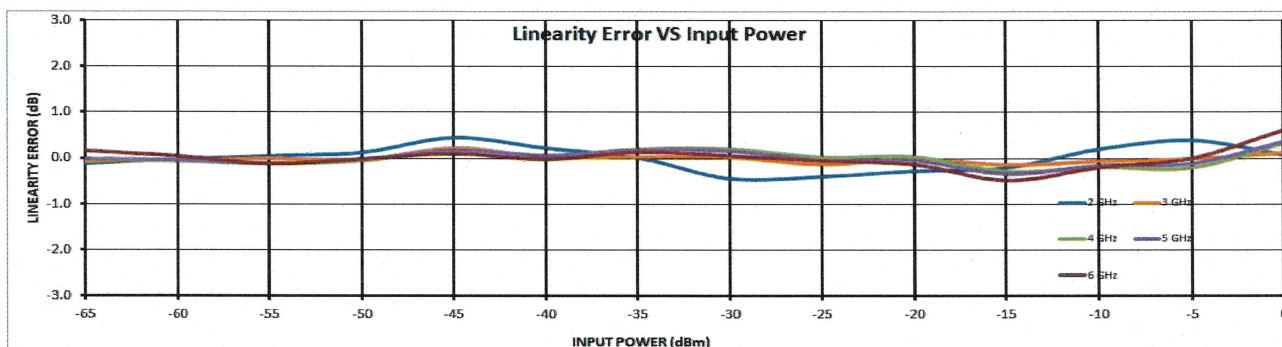



Summary Data For EWDM-2G6G-65-70MV-1

Model: EWDM-2G6G-65-70MV-1
Serial No: PL42362
Date: 07/29/2024
Tested By: J. Monley
Test Temp: +85°C
Input Port: RF Port

DC Offset: -8 mV



Frequency

2 GHz	INTERCEPT (mV)	4617
	SLOPE (mV/dB)	67.8
	MAX LIN ERROR	0.52
	MAX ACC ERROR	1.24

3 GHz	INTERCEPT (mV)	4717
	SLOPE (mV/dB)	68.9
	MAX LIN ERROR	0.54
	MAX ACC ERROR	1.27

4 GHz	INTERCEPT (mV)	4687
	SLOPE (mV/dB)	69.8
	MAX LIN ERROR	0.63
	MAX ACC ERROR	0.71

5 GHz	INTERCEPT (mV)	4682
	SLOPE (mV/dB)	69.4
	MAX LIN ERROR	0.52
	MAX ACC ERROR	0.64

6 GHz	INTERCEPT (mV)	4655
	SLOPE (mV/dB)	70
	MAX LIN ERROR	0.54
	MAX ACC ERROR	1.31

-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
181	527	881	1235	1581	1929	2259	2588	2939	3268	3603	3944	4267	4582
-28	-21	-8	9	16	25	15	5	17	7	3	5	-11	-35
-0.41	-0.31	-0.09	0.13	0.23	0.36	0.23	0.08	0.25	0.10	0.04	0.07	-0.16	-0.52
0.15	0.15	0.27	0.39	0.39	0.42	0.19	-0.06	0.01	-0.23	-0.39	-0.46	-0.79	-1.24

-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
210	574	919	1271	1623	1971	2317	2680	3020	3353	3679	4030	4361	4680
-28	-9	-8	-1	7	10	12	30	26	14	-5	2	-12	-37
-0.41	-0.12	-0.12	-0.01	0.10	0.15	0.17	0.44	0.37	0.20	-0.07	0.02	-0.17	-0.54
0.57	0.83	0.82	0.91	0.99	1.02	1.02	1.27	1.19	1.00	0.71	0.78	0.57	0.18

-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
154	477	839	1194	1537	1899	2259	2633	2987	3310	3626	3978	4320	4665
1	-25	-11	-5	-11	2	14	39	44	18	-15	-11	-18	-22
0.02	-0.35	-0.16	-0.07	-0.16	0.03	0.19	0.56	0.63	0.26	-0.21	-0.16	-0.26	-0.31
-0.24	-0.57	-0.34	-0.21	-0.25	-0.02	0.19	0.59	0.71	0.38	-0.06	0.03	-0.02	-0.04

-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
163	493	855	1210	1553	1911	2267	2634	2982	3304	3623	3979	4318	4665
-6	-23	-8	-1	-5	8	15	35	36	11	-17	-9	-17	-17
-0.09	-0.34	-0.12	-0.01	-0.07	0.09	0.22	0.50	0.52	0.15	-0.25	-0.12	-0.24	-0.24
-0.11	-0.34	-0.11	0.02	-0.02	0.16	0.30	0.61	0.64	0.29	-0.10	0.05	-0.05	-0.04

-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
131	426	798	1150	1485	1849	2208	2578	2942	3260	3578	3940	4299	4661
28	-27	-8	-4	-19	-5	4	24	38	6	-25	-14	-5	6
0.40	-0.39	-0.08	-0.05	-0.27	-0.07	0.06	0.34	0.54	0.08	-0.37	-0.20	-0.08	0.09
-0.57	-1.31	-0.93	-0.84	-1.00	-0.74	-0.55	-0.20	0.06	-0.35	-0.75	-0.52	-0.33	-0.10

AVG. SLOPE: 69.2 mV/dB

-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
0.57	1.07	0.87	0.87	1.00	0.88	0.79	0.74	0.59	0.67	0.73	0.65	0.68	0.71

RF Input Power (dBm)

Measured Value (mV)	
ERROR (mV)	
LINEARITY ERROR (dB)	
LOG ACCURACY (dB)	



Measured Value (mV)	
ERROR (mV)	
LINEARITY ERROR (dB)	
LOG ACCURACY (dB)	

Measured Value (mV)	
ERROR (mV)	
LINEARITY ERROR (dB)	
LOG ACCURACY (dB)	

Measured Value (mV)	
ERROR (mV)	
LINEARITY ERROR (dB)	
LOG ACCURACY (dB)	

Measured Value (mV)	
ERROR (mV)	
LINEARITY ERROR (dB)	
LOG ACCURACY (dB)	


Flatness dB: ±1.07 dB

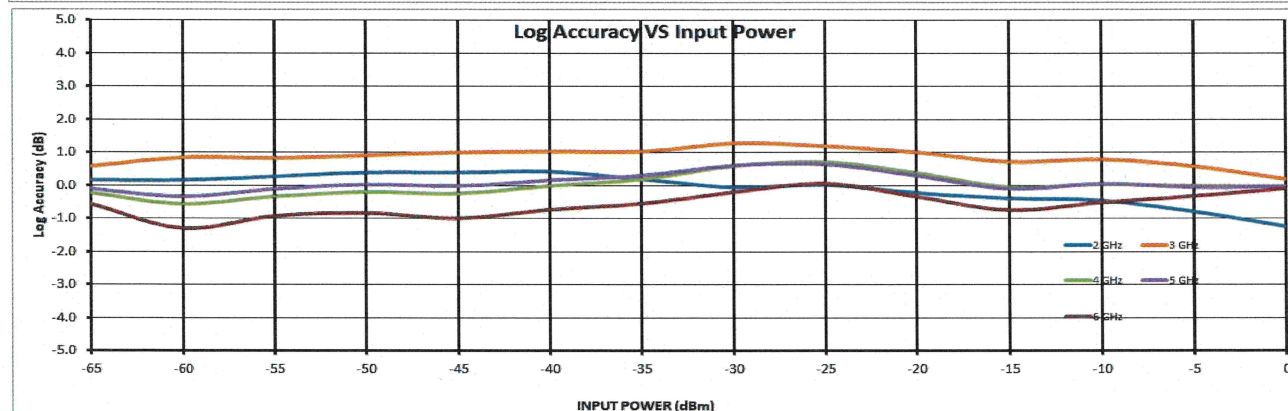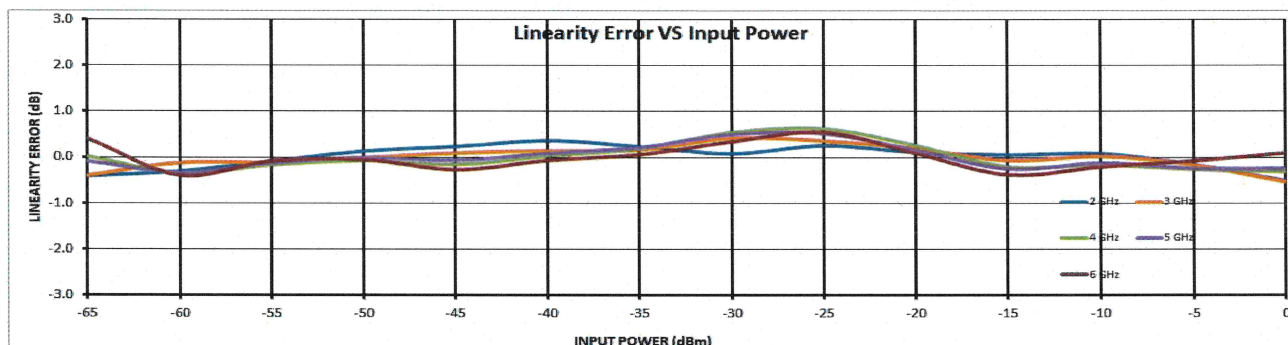





Summary Data
For
EWDM-2G6G-65-70MV-1

Rise Time

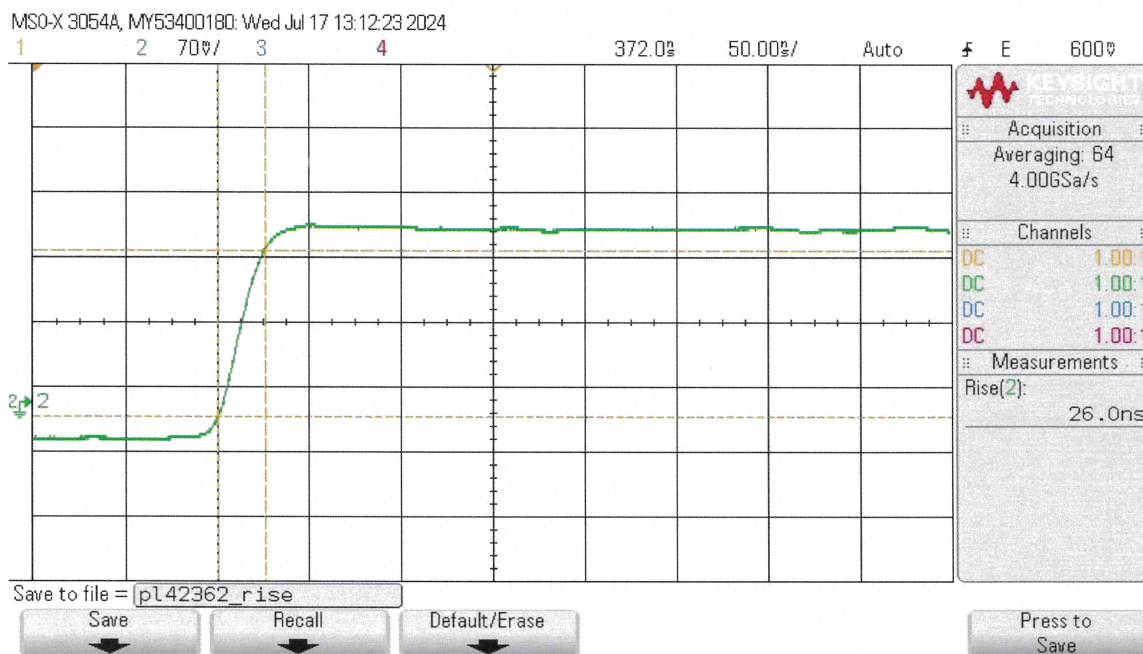

Fall and Recovery Time

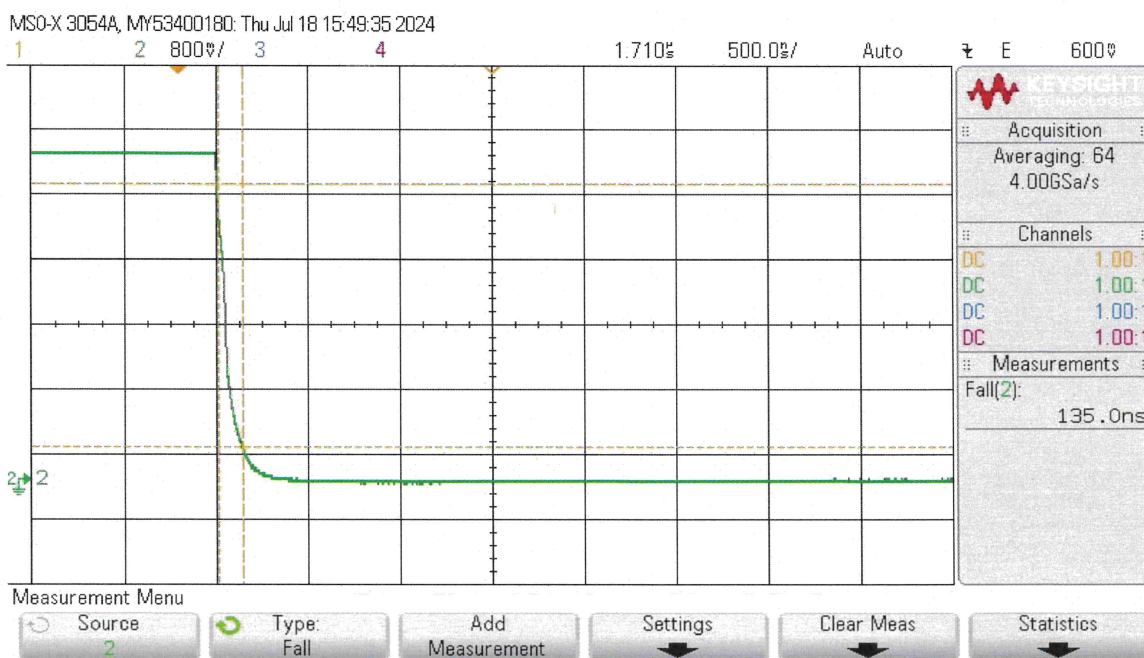



Summary Data
For
EWDM-2G6G-65-70MV-1

Settling Time

