



Tested By: Joshua Monley

Temperature: 0°C TO +85°C

Date 7/29/2024

Drawing No: 27637945

Rev: A1

TEST ITEM NO	PARAMETERS	SPECIFIED VALUE	TEST RESULTS	QA QC
1	Frequency Range:	2 to 6 GHz	2 to 6 GHz	PMI QA3
2	VSWR:	2.0:1 MAX @ 50 Ω	1.45:1 @ 50 Ω (RF IN) 1.37:1 @ 50 Ω (BIT IN) 1.22:1 @ 50 Ω (RF OUT) 1.53:1 @ 50 Ω (SW OUT)	
3	Noise Figure:	6 dB MAX	4.6 dB	
4	Input Power:	(1) 1 W CW, Max. (2) 100 W Peak @ PW = 1 us & Duty Cycle = 1%, Max.	PASS	
5	TTL Control	See Logic Table	PASS	
6	SP3T Switch Isolation	60 dB MIN (All Ports)	> 60 dB	
7	SP3T Switching Speed:	100 ns MAX	50 ns	
8	RF OUT Linear Gain	+33 dB MIN, 39 dB MAX	+36.88 dB MAX +34.86 dB MIN	
9	RF OUT Frequency Flatness:	±2.0 dB MAX	±1 dB	
10	RF OUT 1 dB Compression Point:	+3 dBm MIN	+10.67 dBm	
11	RF OUT Second Harmonic:	-9 dBc MIN	-40 dBc	
12	RF OUT Third Harmonic:	-12 dBc MIN	-51 dBc	

7311-F Grove Road Frederick, MD 21704 USA

Phone: (301)662-5019 Fax: (301)662-1731

Website: www.pmi-rf.com Email: sales@pmi-rf.com



**Summary Data
For
EWDM-2G6G-65-70MV-1**

13	SW Linear Gain	+7 dB MIN, 15 dB MAX	+11.13 dB MAX +10.59 dB MIN	PMI QA3
14	SW Frequency Flatness:	±1.2 dB MAX	±0.3 dB	
15	SW 1 dB Compression Point:	+3 dBm MIN	+7.16 dBm	
16	SW Second Harmonic:	-9 dBc MIN	-27 dBc	
17	SW Third Harmonic:	-12 dBc MIN	-47 dBc	
18	VIDEO OUT TSS:	-71 dBm MAX	-71 dBm	
19	VIDEO OUT Dynamic Range:	-65 to 0 dBm	-65 to 0 dBm	
20	VIDEO OUT Log Slope Fixed:	70 ± 3mV/dB	70.8 mV/dB	
21	VIDEO OUT Log Linearity:	±0.75 dB MAX @ 4 GHZ	±0.23 dB	
22	VIDEO OUT Log Accuracy:	±1.25 dB MAX	±0.94 dB	
23	VIDEO OUT Absolute Log Accuracy:	±1.5 dB MAX	±1.18 dB	
24	VIDEO OUT DC Offset:	0 ±70 mV (RF Input Terminated & DC Power On)	14 mV	
25	VIDEO OUT Rise Time (10% to 90%):	25 ns TYP 28 ns MAX	21.3 ns	
26	VIDEO OUT Fall Time (90% to 10%):	300 ns MAX	146.9 ns	
27	VIDEO OUT Settling Time:	50 ns With in ±70 mV of final value, MAX	< 50 ns	
28	VIDEO OUT Recovery Time:	0.5 us MAX to within 1 dB of baseline	0.454 us	



**Summary Data
For
EWDM-2G6G-65-70MV-1**

29	VIDEO OUT Video Frequency Flatness:	± 1.0 dB MAX	± 0.7 dB	PMI QA3
30	VIDEO OUT CW Immunity:	A. CW Immune Power TSS to -40 dBm Baseline Shift: 200 mV MAX	< 200 mV	
		B. Pulse Peak Amplitude Loss; 2 dB MAX	< 2 dB	
		CW Immunity Time at CW = -40 dBm, ≤ 4 ms	1.16 ms	
		CW Recovery Time at CW = -40 dBm, ≤ 50 us	< 50 us	
31	VIDEO OUT Pulse Response, input Signal:	100 ns to 300 us	100 ns to 300 us	
32	VIDEO OUT load Impedance:	$75 \pm 1 \Omega$	75 Ω	
33	VIDEO OUT Video Output driver capability	150 ft. RG11 into 75 ohm load	PASS	
34	Pulse density capability:	10% duty cycle 100ns; 70% duty cycle 300us at peak power -10 dBm with 1 dB variable for pulse amplitude and baseline	PASS	
35	VIDEO OUT Noise Level (Vp-p):	150 mV TYP	< 150 mV	



Summary Data
For
EWDM-2G6G-65-70MV-1

36	Droop of the Output Video Pulse @ 300us & - 65 dBm	70mV (1 dB) MAX	< 70 mV	PMI QA3
37	VIDEO OUT Propagation Delay:	50 ns MAX Excluding cable	40 ns	
38	Power Supply	+15 V @ 1000 mA MAX -15 V @ 500 mA MAX	+15 V @ 606 mA -15 V @ 133 mA	
39	Power Supply Ripple From DC to 10 MHz	100 mV MAX	PASS	

QA/QC Approval:

H. Kuter

Date:

7-30-24



Summary Data For EWDM-2G6G-65-70MV-1

Model: EWDM-2G6G-65-70MV-1
Serial No: PL42363
Date: 07/29/2024
Tested By: F. Cortes
Test Temp: +25°C
Input Port: RF Port

DC Offset: 14 mV



Frequency

2 GHz	INTERCEPT (mV)	4848
	SLOPE (mV/dB)	69.5
	MAX LIN ERROR	0.58
	MAX ACC ERROR	0.82

3 GHz	INTERCEPT (mV)	4920
	SLOPE (mV/dB)	70.3
	MAX LIN ERROR	0.25
	MAX ACC ERROR	0.64

4 GHz	INTERCEPT (mV)	4900
	SLOPE (mV/dB)	70.3
	MAX LIN ERROR	0.23
	MAX ACC ERROR	0.34

5 GHz	INTERCEPT (mV)	4883
	SLOPE (mV/dB)	70.4
	MAX LIN ERROR	0.18
	MAX ACC ERROR	0.36

6 GHz	INTERCEPT (mV)	4865
	SLOPE (mV/dB)	70.8
	MAX LIN ERROR	0.37
	MAX ACC ERROR	0.84

AVG. SLOPE: 70.3 mV/dB

-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
336	687	1029	1372	1741	2081	2417	2724	3072	3451	3817	4186	4526	4830
3	8	1	-3	19	11	0	-40	-40	-8	11	33	25	-18
0.04	0.09	0.02	-0.05	0.27	0.16	0.00	-0.58	-0.57	-0.11	0.16	0.47	0.37	-0.26
0.23	0.23	0.10	-0.02	0.23	0.07	-0.14	-0.77	-0.82	-0.42	-0.21	0.04	-0.12	-0.80

-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
357	710	1054	1396	1767	2112	2464	2802	3146	3519	3867	4228	4579	4911
4	5	-2	-11	9	2	3	-10	-17	4	1	11	10	-9
0.05	0.08	-0.03	-0.16	0.12	0.03	0.04	-0.15	-0.25	0.06	0.01	0.15	0.15	-0.12
0.53	0.56	0.46	0.32	0.60	0.52	0.53	0.34	0.23	0.54	0.50	0.64	0.63	0.36

-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
337	690	1031	1375	1747	2090	2445	2789	3127	3486	3837	4207	4552	4910
5	7	-4	-11	10	1	5	-3	-16	-8	-9	10	3	10
0.08	0.10	-0.05	-0.16	0.14	0.02	0.07	-0.04	-0.23	-0.12	-0.13	0.14	0.05	0.14
0.25	0.27	0.13	0.02	0.32	0.20	0.26	0.15	-0.04	0.07	0.07	0.34	0.25	0.34

-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
312	664	1002	1348	1716	2067	2426	2773	3110	3465	3817	4186	4535	4891
8	8	-7	-13	3	2	8	3	-12	-9	-18	7	4	8
0.11	0.11	-0.09	-0.18	0.04	0.02	0.12	0.04	-0.17	-0.13	-0.14	0.10	0.06	0.11
-0.11	-0.10	-0.28	-0.36	-0.12	-0.13	-0.02	-0.08	-0.28	-0.23	-0.21	0.04	0.01	0.07

-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
282	628	964	1314	1675	2028	2387	2737	3080	3424	3779	4168	4524	4891
21	13	-5	-10	-3	-4	1	-3	-14	-24	-23	12	14	26
0.29	0.18	-0.08	-0.14	-0.04	-0.05	0.02	-0.04	-0.20	-0.34	-0.33	0.16	0.19	0.37
-0.53	-0.61	-0.83	-0.84	-0.71	-0.68	-0.57	-0.59	-0.71	-0.81	-0.76	-0.22	-0.15	0.07

-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
0.53	0.58	0.64	0.58	0.65	0.60	0.55	0.56	0.53	0.68	0.63	0.43	0.39	0.58

RF Input Power (dBm)

Measured Value (mV)	
ERROR (mV)	
LINEARITY ERROR (dB)	
LOG ACCURACY (dB)	



Measured Value (mV)	
ERROR (mV)	
LINEARITY ERROR (dB)	
LOG ACCURACY (dB)	

Measured Value (mV)	
ERROR (mV)	
LINEARITY ERROR (dB)	
LOG ACCURACY (dB)	

Measured Value (mV)	
ERROR (mV)	
LINEARITY ERROR (dB)	
LOG ACCURACY (dB)	

Measured Value (mV)	
ERROR (mV)	
LINEARITY ERROR (dB)	
LOG ACCURACY (dB)	

Flatness dB: ±0.68 dB

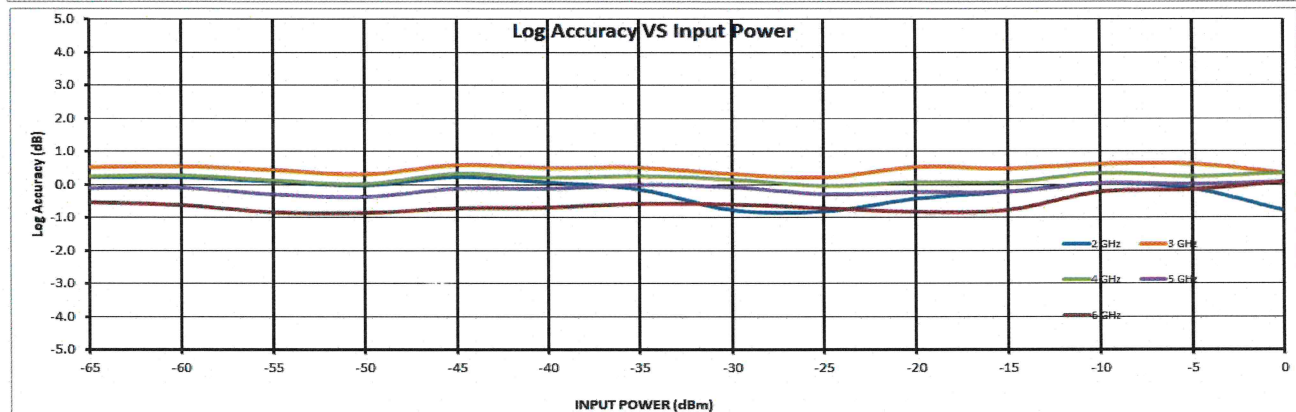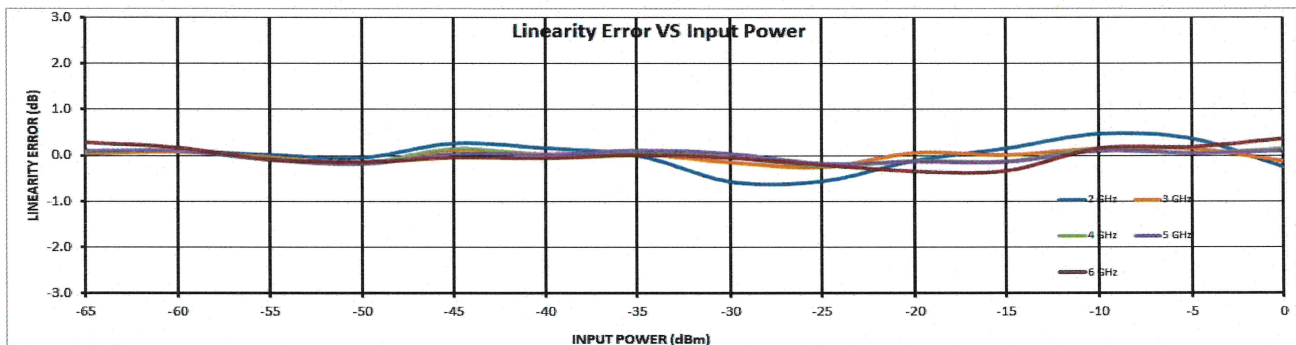



Summary Data For EWDM-2G6G-65-70MV-1

Model: EWDM-2G6G-65-70MV-1
Serial No: PL42363
Date: 07/29/2024
Tested By: F. Cortes
Test Temp: +25°C
Input Port: BIT Port

DC Offset: 14 mV



Frequency

2 GHz	INTERCEPT (mV)	4833
	SLOPE (mV/dB)	69.5
	MAX LIN ERROR	0.68
	MAX ACC ERROR	0.94

3 GHz	INTERCEPT (mV)	4914
	SLOPE (mV/dB)	70.3
	MAX LIN ERROR	0.25
	MAX ACC ERROR	0.65

4 GHz	INTERCEPT (mV)	4888
	SLOPE (mV/dB)	70.3
	MAX LIN ERROR	0.2
	MAX ACC ERROR	0.27

5 GHz	INTERCEPT (mV)	4876
	SLOPE (mV/dB)	70.5
	MAX LIN ERROR	0.16
	MAX ACC ERROR	0.34

6 GHz	INTERCEPT (mV)	4855
	SLOPE (mV/dB)	70.8
	MAX LIN ERROR	0.39
	MAX ACC ERROR	0.86

AVG. SLOPE: 70.3 mV/dB

-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
317	670	1011	1355	1723	2063	2401	2707	3056	3431	3800	4168	4514	4818
2	8	1	-2	18	11	1	-41	-39	-12	10	30	28	-15
0.03	0.11	0.02	-0.03	0.26	0.15	0.01	-0.58	-0.56	-0.17	0.14	0.43	0.41	-0.22
0.09	0.11	-0.03	-0.14	0.10	-0.07	-0.26	-0.90	-0.94	-0.60	-0.35	-0.12	-0.19	-0.87

349	703	1048	1390	1762	2105	2457	2796	3140	3512	3861	4222	4573	4906
3	5	-1	-11	10	2	2	-10	-17	3	1	11	10	-8
0.04	0.07	-0.02	-0.15	0.14	0.02	0.03	-0.14	-0.25	0.05	0.01	0.15	0.15	-0.12
0.55	0.58	0.49	0.36	0.65	0.53	0.54	0.36	0.26	0.55	0.52	0.65	0.65	0.39

322	676	1017	1363	1733	2076	2432	2776	3116	3473	3824	4195	4540	4898
5	7	-4	-9	9	0	5	-3	-14	-9	-10	10	3	10
0.07	0.10	-0.05	-0.13	0.13	0.01	0.07	-0.04	-0.20	-0.13	-0.14	0.14	0.05	0.14
0.16	0.20	0.05	-0.02	0.24	0.12	0.18	0.08	-0.08	0.00	-0.01	0.27	0.18	0.27

304	655	993	1341	1707	2057	2417	2764	3103	3456	3808	4178	4528	4887
9	8	-7	-11	2	0	8	2	-11	-11	-11	7	4	11
0.13	0.11	-0.10	-0.16	0.03	0.00	0.11	0.03	-0.16	-0.15	-0.16	0.09	0.06	0.15
-0.09	-0.10	-0.29	-0.34	-0.13	-0.15	-0.03	-0.09	-0.27	-0.26	-0.24	0.03	0.01	0.11

272	619	955	1304	1665	2018	2376	2727	3072	3414	3769	4158	4514	4883
21	13	-5	-10	-3	-4	0	-3	-12	-25	-24	11	13	28
0.29	0.19	-0.07	-0.14	-0.04	-0.06	0.00	-0.05	-0.18	-0.35	-0.34	0.18	0.18	0.39
-0.55	-0.61	-0.83	-0.86	-0.73	-0.71	-0.61	-0.62	-0.71	-0.84	-0.79	-0.26	-0.19	0.06

0.55	0.60	0.66	0.61	0.69	0.62	0.58	0.63	0.60	0.70	0.65	0.46	0.42	0.63
------	------	------	------	------	------	------	------	------	------	------	------	------	------

RF Input Power (dBm)

Measured Value (mV)	
ERROR (mV)	
LINEARITY ERROR (dB)	
LOG ACCURACY (dB)	



Measured Value (mV)	
ERROR (mV)	
LINEARITY ERROR (dB)	
LOG ACCURACY (dB)	


Measured Value (mV)	
Error (mV)	
LINEARITY ERROR (dB)	
LOG ACCURACY (dB)	

Measured Value (mV)	
Error (mV)	
LINEARITY ERROR (dB)	
LOG ACCURACY (dB)	

Measured Value (mV)	
Error (mV)	
LINEARITY ERROR (dB)	
LOG ACCURACY (dB)	

Flatness dB: ±0.7 dB

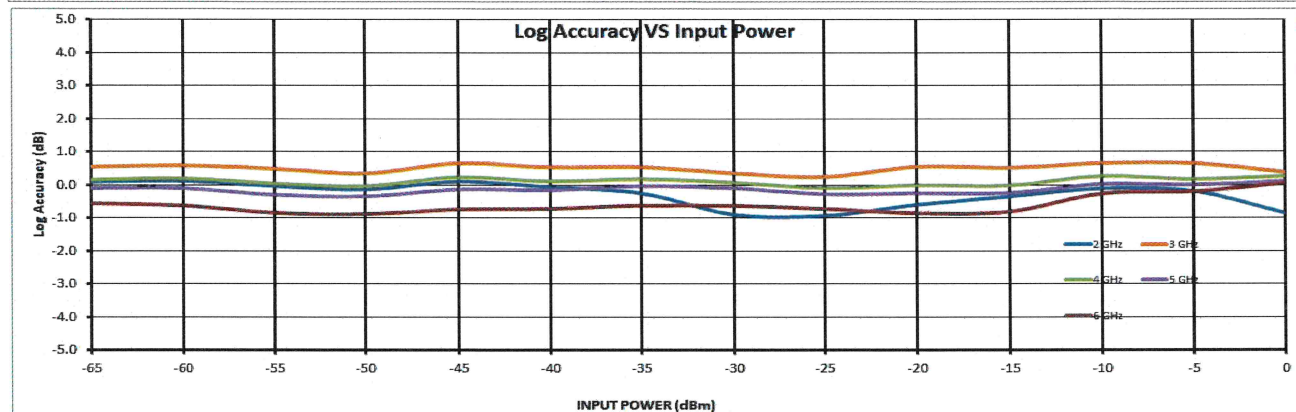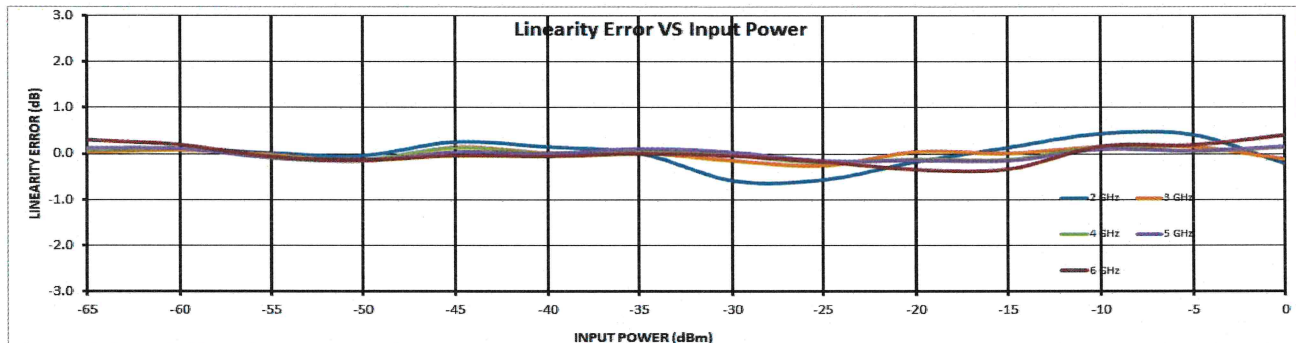



Summary Data For EWDM-2G6G-65-70MV-1

Model: EWDM-2G6G-65-70MV-1
Serial No: PL42363
Date: 07/29/2024
Tested By: J. Monley
Test Temp: 0°C
Input Port: RF Port

DC Offset: 34 mV



Frequency

2 GHz	INTERCEPT (mV)	4886
	SLOPE (mV/dB)	70
	MAX LIN ERROR	0.66
	MAX ACC ERROR	0.77

3 GHz	INTERCEPT (mV)	4953
	SLOPE (mV/dB)	70.8
	MAX LIN ERROR	0.2
	MAX ACC ERROR	0.6

4 GHz	INTERCEPT (mV)	4921
	SLOPE (mV/dB)	70.5
	MAX LIN ERROR	0.16
	MAX ACC ERROR	0.24

5 GHz	INTERCEPT (mV)	4908
	SLOPE (mV/dB)	70.9
	MAX LIN ERROR	0.19
	MAX ACC ERROR	0.49

6 GHz	INTERCEPT (mV)	4883
	SLOPE (mV/dB)	70.9
	MAX LIN ERROR	0.34
	MAX ACC ERROR	0.81

AVG. SLOPE: 70.6 mV/dB

	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
2 GHz	339	693	1034	1381	1755	2093	2430	2747	3096	3473	3840	4208	4565	4882
	6	9	0	-3	21	9	-5	-38	-39	-12	5	22	29	-4
	0.08	0.13	0.00	-0.04	0.30	0.12	-0.07	-0.64	-0.56	-0.17	0.06	0.32	0.42	-0.06
	0.20	0.21	0.04	-0.05	0.25	0.03	-0.20	-0.71	-0.77	-0.43	-0.24	-0.03	0.03	-0.48
3 GHz	356	715	1059	1402	1775	2119	2473	2821	3169	3646	3893	4251	4603	4951
	4	9	-1	-12	7	-3	-2	-8	-14	9	2	6	4	-2
	0.06	0.13	-0.01	-0.17	0.10	-0.04	-0.03	-0.12	-0.20	0.13	0.03	0.09	0.06	-0.02
	0.44	0.52	0.39	0.25	0.53	0.40	0.41	0.34	0.26	0.60	0.51	0.58	0.57	0.49
4 GHz	338	695	1038	1383	1753	2099	2458	2806	3147	3509	3858	4222	4566	4925
	2	6	-3	-11	6	0	6	0	-10	-1	-5	7	-2	4
	0.03	0.09	-0.05	-0.16	0.09	0.00	0.09	0.01	-0.15	-0.01	-0.07	0.10	-0.03	0.06
	0.18	0.24	0.09	-0.02	0.22	0.12	0.20	0.11	-0.05	0.08	0.02	0.17	0.04	0.12
5 GHz	310	664	1001	1350	1720	2069	2433	2788	3127	3480	3834	4207	4556	4920
	10	10	-8	-13	2	-3	8	7	-9	-11	-11	7	2	11
	0.14	0.14	-0.11	-0.19	0.03	-0.05	0.09	0.09	-0.13	-0.15	-0.16	0.10	0.03	0.16
	-0.21	-0.20	-0.43	-0.49	-0.25	-0.31	-0.16	-0.13	-0.33	-0.33	-0.32	-0.04	-0.10	0.05
6 GHz	294	645	976	1327	1686	2038	2402	2756	3102	3448	3800	4182	4538	4907
	20	16	-7	-11	-6	-9	1	0	-8	-17	-20	8	9	24
	0.28	0.23	-0.10	-0.15	-0.09	-0.12	0.01	0.00	-0.12	-0.24	-0.28	0.11	0.13	0.34
	-0.44	-0.47	-0.78	-0.81	-0.73	-0.75	-0.59	-0.58	-0.68	-0.79	-0.80	-0.39	-0.35	-0.13
AVG. SLOPE: 70.6 mV/dB	0.44	0.50	0.59	0.53	0.63	0.57	0.50	0.52	0.52	0.69	0.66	0.49	0.46	0.49

RF Input Power (dBm)

Measured Value (mV)	
ERROR (mV)	
LINEARITY ERROR (dB)	
LOG ACCURACY (dB)	



Measured Value (mV)	
ERROR (mV)	
LINEARITY ERROR (dB)	
LOG ACCURACY (dB)	

Measured Value (mV)	
ERROR (mV)	
LINEARITY ERROR (dB)	
LOG ACCURACY (dB)	

Measured Value (mV)	
ERROR (mV)	
LINEARITY ERROR (dB)	
LOG ACCURACY (dB)	

Measured Value (mV)	
ERROR (mV)	
LINEARITY ERROR (dB)	
LOG ACCURACY (dB)	

Flatness dB: ±0.69 dB

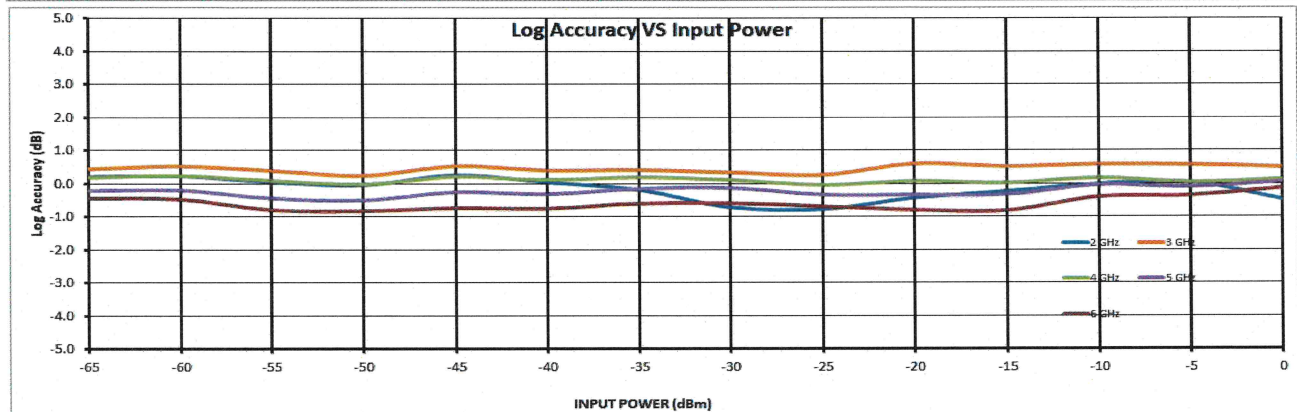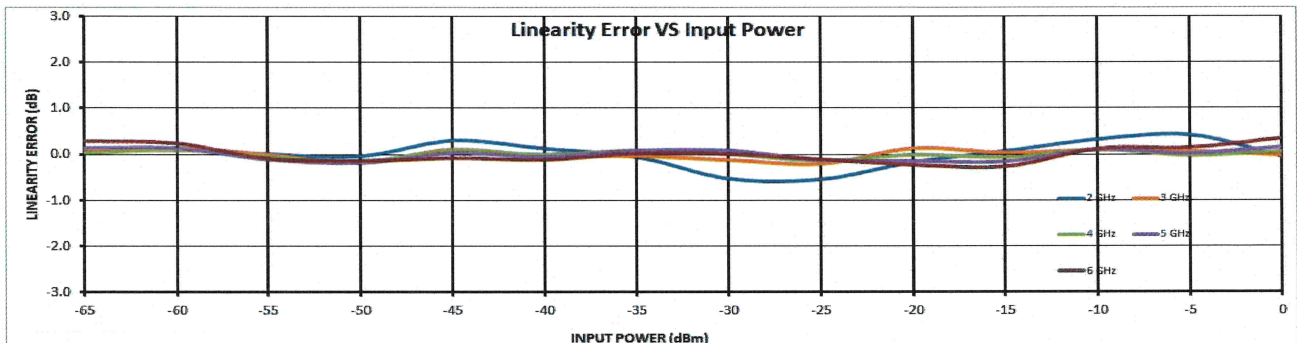



Summary Data For EWDM-2G6G-65-70MV-1

Model: EWDM-2G6G-65-70MV-1
Serial No: PL42363
Date: 07/29/2024
Tested By: J. Monley
Test Temp: +85°C
Input Port: RF Port

DC Offset: 3 mV



Frequency

2 GHz	INTERCEPT (mV)	4651
	SLOPE (mV/dB)	68.1
	MAX LIN ERROR	0.62
	MAX ACC ERROR	1.18

3 GHz	INTERCEPT (mV)	4743
	SLOPE (mV/dB)	69.1
	MAX LIN ERROR	0.57
	MAX ACC ERROR	1.1

4 GHz	INTERCEPT (mV)	4718
	SLOPE (mV/dB)	69.5
	MAX LIN ERROR	0.41
	MAX ACC ERROR	0.69

5 GHz	INTERCEPT (mV)	4703
	SLOPE (mV/dB)	69.5
	MAX LIN ERROR	0.43
	MAX ACC ERROR	0.5

6 GHz	INTERCEPT (mV)	4684
	SLOPE (mV/dB)	70.1
	MAX LIN ERROR	0.44
	MAX ACC ERROR	1.17

AVG. SLOPE: 69.3 mV/dB

-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
196	546	907	1254	1597	1940	2282	2608	2953	3289	3646	3988	4303	4609
-27	-17	3	9	12	14	15	1	5	0	17	18	-8	-42
-0.39	-0.26	0.04	0.14	0.17	0.21	0.22	0.01	0.07	0.01	0.25	0.27	-0.11	-0.62
0.12	0.17	0.38	0.39	0.34	0.29	0.23	-0.07	-0.09	-0.24	-0.08	-0.15	-0.60	-1.18

-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
225	596	947	1292	1639	1984	2340	2689	3033	3371	3706	4062	4396	4704
-29	-4	2	2	3	3	14	17	16	9	-1	9	-2	-39
-0.42	-0.05	0.03	0.03	0.05	0.04	0.20	0.25	0.23	0.13	-0.02	0.13	-0.03	-0.57
0.53	0.89	0.96	0.94	0.95	0.93	1.06	1.10	1.07	0.95	0.78	0.92	0.74	0.19

-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
187	529	896	1243	1581	1935	2298	2660	3007	3331	3664	4020	4364	4696
-11	-17	2	2	-8	-1	14	28	28	4	-11	-2	-6	-22
-0.16	-0.24	0.03	0.03	-0.11	-0.02	0.20	0.41	0.40	0.06	-0.16	-0.04	-0.09	-0.31
-0.01	-0.08	0.21	0.23	0.11	0.22	0.46	0.68	0.69	0.37	0.18	0.32	0.28	0.07

-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
180	509	881	1228	1567	1921	2283	2647	2991	3310	3649	4008	4351	4683
-4	-22	2	1	-7	-1	13	30	28	-3	-11	0	-4	-20
-0.05	-0.32	0.03	0.02	-0.11	-0.01	0.19	0.43	0.38	-0.04	-0.16	0.00	-0.06	-0.29
-0.12	-0.37	0.00	0.01	-0.09	0.02	0.24	0.50	0.46	0.07	-0.04	0.14	0.09	-0.11

-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
151	453	835	1179	1507	1867	2229	2604	2962	3277	3610	3977	4338	4688
24	-24	7	1	-22	-13	-1	23	31	-5	-23	-6	4	4
0.35	-0.35	0.10	0.01	-0.31	-0.18	-0.02	0.33	0.44	-0.07	-0.32	-0.09	0.06	0.05
-0.53	-1.17	-0.66	-0.69	-0.96	-0.76	-0.54	-0.12	0.04	-0.41	-0.60	-0.31	-0.09	-0.04

-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
0.53	1.03	0.81	0.82	0.95	0.84	0.80	0.61	0.58	0.68	0.69	0.61	0.67	0.69

RF Input Power (dBm)

Measured Value (mV)	
ERROR (mV)	
LINEARITY ERROR (dB)	
LOG ACCURACY (dB)	



Measured Value (mV)	
ERROR (mV)	
LINEARITY ERROR (dB)	
LOG ACCURACY (dB)	

Measured Value (mV)	
ERROR (mV)	
LINEARITY ERROR (dB)	
LOG ACCURACY (dB)	

Measured Value (mV)	
ERROR (mV)	
LINEARITY ERROR (dB)	
LOG ACCURACY (dB)	

Measured Value (mV)	
ERROR (mV)	
LINEARITY ERROR (dB)	
LOG ACCURACY (dB)	


Flatness dB: ±1.03 dB

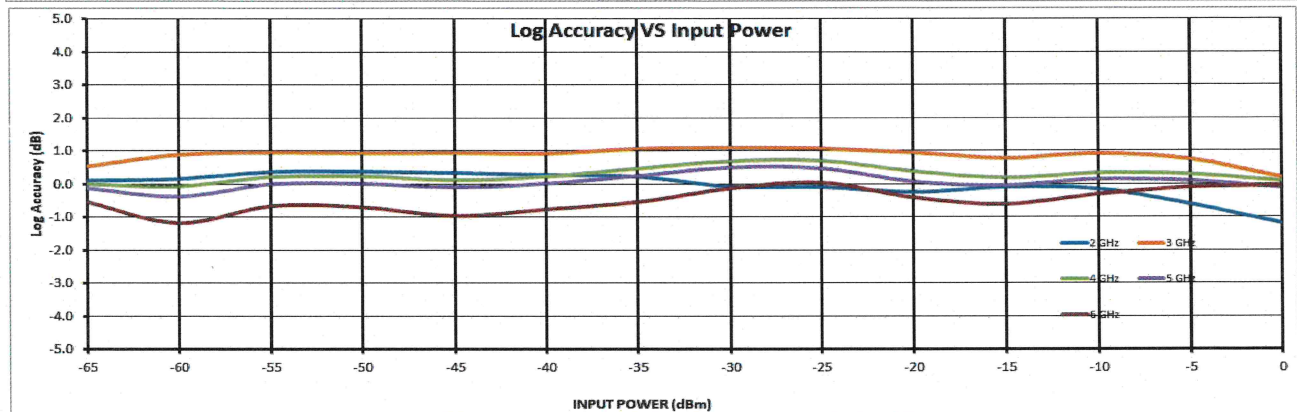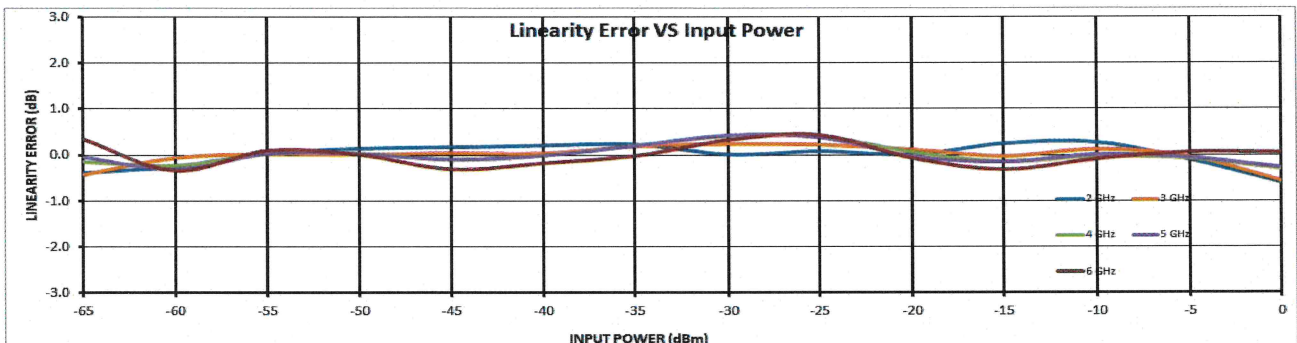




Summary Data
For
EWDM-2G6G-65-70MV-1

Rise Time

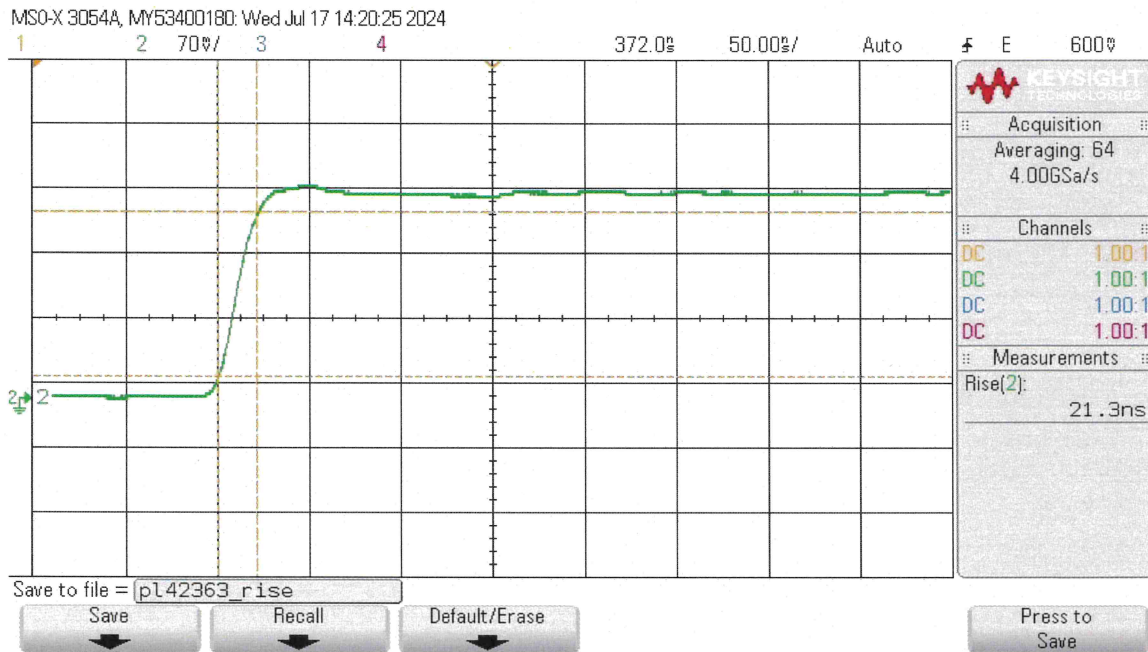

Fall and Recovery Time

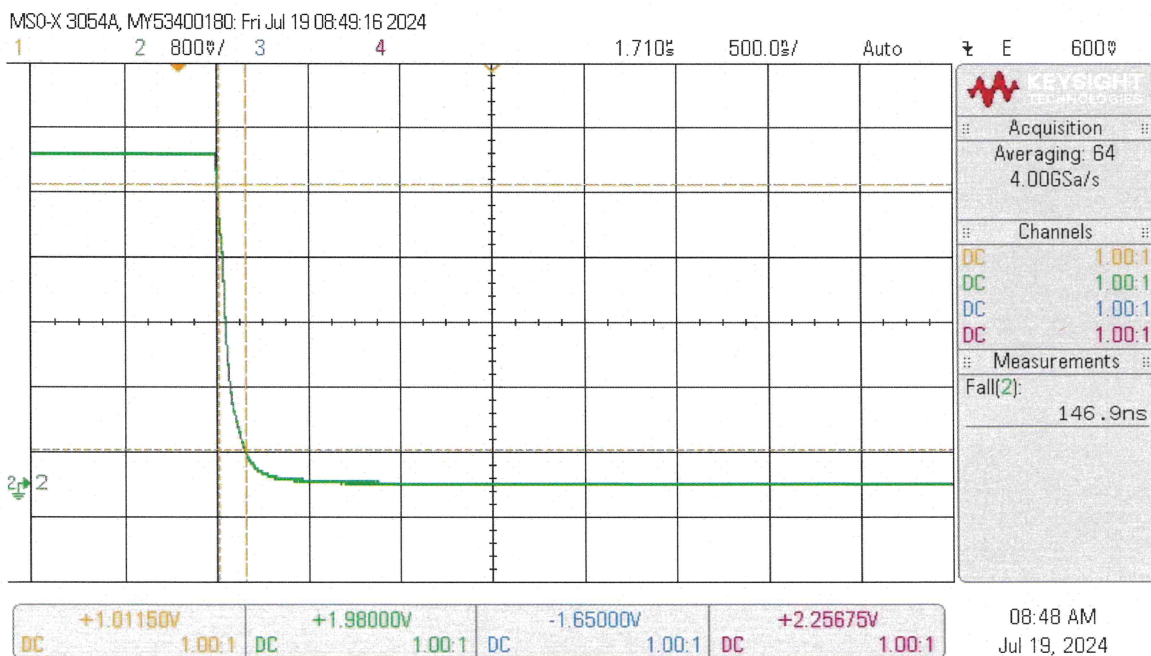



Summary Data
For
EWDM-2G6G-65-70MV-1

Settling Time

MSO-X 3054A, MY53400180: Wed Jul 17 12:06:50 2024

