


SUMMARY TEST DATA ON SDLVA-6G18G-CD-2-OPT218

CUSTOMER: _____
 SO: _____
 MODEL NO: SDLVA-6G18G-CD-2-OPT218
 SERIAL NO: PL42812/2346

TESTED BY: Jim Hopson
 TEMPERATURE: +25°C
 DATE: 11/14/2023
 DRAWING NO: 27623906 REV: A1

| TEST ITEM NO: | PARAMETERS | SPECIFIED VALUE | MEASURED VALUE | REMARKS QA/QC |
|---------------|-----------------|--|---------------------------|--|
| 1 | Frequency Range | 2.0 GHz – 18.0 GHz | GHz - GHz |  |
| 2 | Flatness | ± 2.0 dB Maximum | ± 1.8dB 25°C See Plots | |
| 3 | TSS | -70 dBm Minimum | -71dBm | |
| 4 | VSWR | 2.0:1 (Input) | 1.92:1 | |
| 5 | Input Power | +17 dBm CW Maximum | Pass | |
| 6 | RF Out | +13 dBm ±3 dB Typical | 14.7/11.9dBm | |
| 7 | Log Slope | 25 mV/dB (±10%) 50Ω | 24.5mV/dB See Plot | |
| 8 | Log Range | -70 to +5 dBm | See Plots | |
| 9 | Log Linearity | ±2.5 dB (-40°C - +85°C) | 2.07/-1.97dB See Plots | |
| 10 | Pulse Range | 30 ns to CW | Pass | |
| 11 | Rise Time | 10 ns (6 ns Typical) | 5.8ns | |
| 12 | Recovery Time | 60 ns Typical | 60 ns Typical | |
| 13 | DC Supply | +15V or +12V @ 350 mA -15V or -12V @ 180 mA | 220 mA 100 mA | |

QA/QC Approval: *K. Muth*


Date: 11-14-23



Frequency

| Frequency | INTERCEPT (mV) | SLOPE (mV/DB) | LN. ERR. (DB) | 70 | 65 | 60 | 55 | 50 | 45 | 40 | 35 | 30 | 25 | 20 | 15 | 10 | 5 | 0 | 5 |
|------------------------|----------------|---------------|---------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| 2 GHz | INTERCEPT (mV) | 1939 | | 257 | 371 | 494 | 611 | 728 | 816 | 932 | 1049 | 1185 | 1329 | 1457 | 1592 | 1713 | 1832 | 1939 | 2064 |
| | SLOPE (mV/DB) | 24.33 | | 21 | 14 | 15 | 10 | 6 | -28 | -34 | -38 | -24 | -2 | 5 | 18 | 18 | 15 | 0 | 4 |
| | LN. ERR. (DB) | 1.6 | | 0.87 | 0.55 | 0.61 | 0.42 | 0.23 | -1.15 | -1.38 | -1.57 | -0.98 | -0.06 | 0.20 | 0.75 | 0.72 | 0.62 | 0.02 | 0.15 |
| 4 GHz | INTERCEPT (mV) | 1934 | | 225 | 348 | 471 | 593 | 718 | 820 | 938 | 1053 | 1185 | 1319 | 1447 | 1580 | 1704 | 1822 | 1927 | 2057 |
| | SLOPE (mV/DB) | 24.5 | | 6 | 6 | 7 | 6 | 9 | -12 | -16 | -24 | -14 | -3 | 3 | 13 | 15 | 10 | -7 | 0 |
| | LN. ERR. (DB) | 0.966 | | 0.24 | 0.26 | 0.28 | 0.26 | 0.36 | -0.48 | -0.66 | -0.97 | -0.58 | -0.11 | 0.11 | 0.54 | 0.60 | 0.42 | -0.30 | 0.01 |
| 6 GHz | INTERCEPT (mV) | 1940 | | 188 | 324 | 443 | 569 | 703 | 812 | 929 | 1043 | 1178 | 1315 | 1448 | 1587 | 1708 | 1825 | 1930 | 2056 |
| | SLOPE (mV/DB) | 24.96 | | 5 | 6 | 0 | 1 | 11 | -5 | -13 | -24 | -14 | -1 | 7 | 21 | 17 | 9 | -10 | -9 |
| | LN. ERR. (DB) | 0.956 | | 0.19 | 0.24 | 0.01 | 0.05 | 0.42 | -0.21 | -0.52 | -0.96 | -0.55 | -0.06 | 0.27 | 0.84 | 0.69 | 0.38 | -0.42 | -0.37 |
| 8 GHz | INTERCEPT (mV) | 1934 | | 208 | 333 | 454 | 579 | 715 | 828 | 947 | 1064 | 1196 | 1335 | 1449 | 1571 | 1697 | 1814 | 1919 | 2048 |
| | SLOPE (mV/DB) | 24.6 | | -4 | -2 | -4 | -2 | 11 | 1 | -3 | -9 | 0 | 16 | 7 | 6 | 9 | 3 | -15 | -9 |
| | LN. ERR. (DB) | 0.638 | | -0.18 | -0.10 | -0.18 | -0.10 | 0.43 | 0.03 | -0.14 | -0.38 | -0.01 | 0.64 | 0.27 | 0.23 | 0.36 | 0.11 | -0.62 | -0.38 |
| 10 GHz | INTERCEPT (mV) | 1953 | | 189 | 313 | 430 | 555 | 690 | 824 | 948 | 1066 | 1200 | 1343 | 1463 | 1593 | 1712 | 1828 | 1932 | 2057 |
| | SLOPE (mV/DB) | 25.2 | | 0 | -2 | -11 | -12 | -3 | 5 | 3 | -5 | 3 | 20 | 14 | 18 | 11 | 1 | -21 | -22 |
| | LN. ERR. (DB) | 0.876 | | 0.01 | -0.07 | -0.43 | -0.47 | -0.11 | 0.20 | 0.12 | -0.20 | 0.12 | 0.79 | 0.56 | 0.71 | 0.44 | 0.04 | -0.84 | -0.88 |
| 12 GHz | INTERCEPT (mV) | 1945 | | 216 | 339 | 462 | 589 | 730 | 853 | 971 | 1095 | 1228 | 1370 | 1462 | 1580 | 1703 | 1819 | 1920 | 2044 |
| | SLOPE (mV/DB) | 24.49 | | -15 | -14 | -13 | -9 | 10 | 10 | 6 | 7 | 18 | 38 | 7 | 3 | 3 | -3 | -25 | -23 |
| | LN. ERR. (DB) | 1.533 | | -0.60 | -0.57 | -0.55 | -0.36 | 0.40 | 0.42 | 0.24 | 0.30 | 0.73 | 1.53 | 0.29 | 0.11 | 0.13 | -0.13 | -1.00 | -0.94 |
| 14 GHz | INTERCEPT (mV) | 1959 | | 196 | 321 | 443 | 576 | 725 | 871 | 993 | 1123 | 1256 | 1386 | 1465 | 1584 | 1707 | 1823 | 1925 | 2050 |
| | SLOPE (mV/DB) | 24.8 | | -27 | -26 | -28 | -19 | 6 | 28 | 26 | 32 | 41 | 47 | 2 | -3 | -4 | -12 | -34 | -33 |
| | LN. ERR. (DB) | 1.906 | | -1.08 | -1.04 | -1.12 | -0.76 | 0.25 | 1.14 | 1.06 | 1.30 | 1.66 | 1.91 | 0.09 | -0.11 | -0.15 | -0.47 | -1.36 | -1.32 |
| 16 GHz | INTERCEPT (mV) | 1942 | | 267 | 383 | 512 | 643 | 787 | 872 | 990 | 1118 | 1247 | 1379 | 1463 | 1583 | 1706 | 1822 | 1925 | 2051 |
| | SLOPE (mV/DB) | 23.75 | | -13 | -16 | -5 | 7 | 12 | -2 | -2 | 7 | 17 | 30 | -4 | -3 | 1 | -2 | -17 | -10 |
| | LN. ERR. (DB) | 1.279 | | -0.54 | -0.66 | -0.23 | 0.29 | 0.51 | -0.07 | -0.10 | 0.29 | 0.72 | 1.28 | -0.18 | -0.13 | 0.05 | -0.07 | -0.73 | -0.42 |
| 18 GHz | INTERCEPT (mV) | 1940 | | 242 | 360 | 486 | 611 | 735 | 844 | 966 | 1088 | 1223 | 1359 | 1452 | 1573 | 1698 | 1815 | 1926 | 2065 |
| | SLOPE (mV/DB) | 24.21 | | -3 | -8 | -1 | 3 | 6 | -6 | -5 | -4 | 10 | 25 | -3 | -3 | 1 | -4 | -14 | 4 |
| | LN. ERR. (DB) | 1.021 | | -0.11 | -0.24 | -0.03 | 0.13 | 0.25 | -0.25 | -0.21 | -0.17 | 0.40 | 1.02 | -0.14 | -0.14 | 0.02 | -0.15 | -0.56 | 0.18 |
| Avg. Slope: 24.5 mV/DB | | | | 1.6 | 1.4 | 1.7 | 1.8 | 1.6 | 1.2 | 1.3 | 1.6 | 1.6 | 1.4 | 0.4 | 0.4 | 0.3 | 0.4 | 0.4 | 0.4 |
| Flatness: dB: ±1.8 dB | | | | | | | | | | | | | | | | | | | |


Video Out VS Input Power

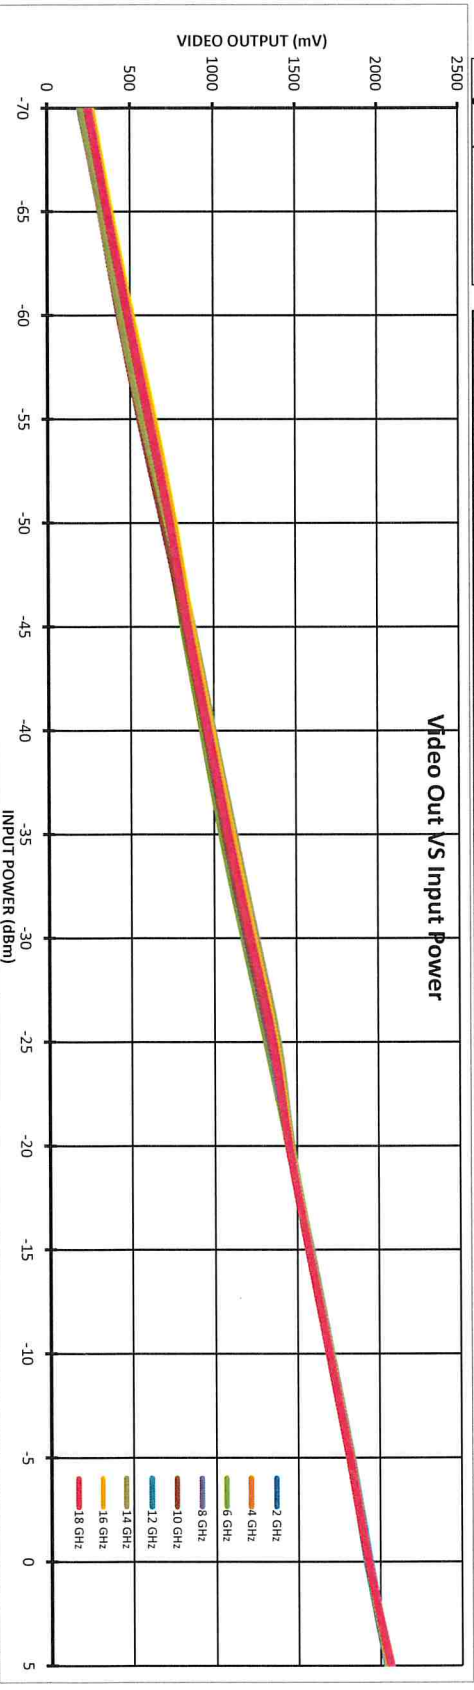




| Frequency | -70 | -65 | -60 | -55 | -50 | -45 | -40 | -35 | -30 | -25 | -20 | -15 | -10 | -5 | 0 | 5 | | |
|------------------------|----------------|-------|-------|-------|-------|-------|------|-------|-------|-------|-------|------|-------|-------|-------|-------|-------|-------|
| 2 GHz | INTERCEPT (mV) | 2028 | 276 | 412 | 545 | 672 | 790 | 878 | 996 | 1118 | 1260 | 1414 | 1532 | 1668 | 1787 | 1909 | 2027 | 2158 |
| | SLOPE (mV/dB) | 25.02 | -1 | 10 | 18 | 20 | 13 | -24 | -31 | -35 | -18 | 11 | 4 | 15 | 9 | 6 | -1 | 5 |
| | LIN. ERR. (dB) | 1.4 | -0.03 | 0.40 | 0.72 | 0.79 | 0.51 | -0.97 | -1.26 | -1.38 | -0.71 | 0.45 | 0.16 | 0.60 | 0.35 | 0.23 | -0.05 | 0.18 |
| 4 GHz | INTERCEPT (mV) | 2019 | 259 | 397 | 530 | 659 | 787 | 885 | 1003 | 1123 | 1258 | 1401 | 1521 | 1654 | 1776 | 1897 | 2011 | 2147 |
| | SLOPE (mV/dB) | 24.99 | -11 | 2 | 11 | 15 | 18 | -9 | -16 | -21 | -11 | 7 | 2 | 10 | 7 | 3 | -8 | 3 |
| | LIN. ERR. (dB) | 0.851 | -0.42 | 0.10 | 0.42 | 0.58 | 0.70 | -0.37 | -0.65 | -0.85 | -0.45 | 0.27 | 0.07 | 0.40 | 0.28 | 0.12 | -0.32 | 0.12 |
| 6 GHz | INTERCEPT (mV) | 2019 | 218 | 366 | 495 | 628 | 766 | 888 | 984 | 1102 | 1241 | 1388 | 1517 | 1654 | 1775 | 1895 | 2008 | 2141 |
| | SLOPE (mV/dB) | 25.51 | -16 | 5 | 6 | 12 | 22 | -4 | -15 | -25 | -13 | 6 | 8 | 17 | 11 | 3 | -11 | -6 |
| | LIN. ERR. (dB) | 0.965 | -0.62 | 0.18 | 0.24 | 0.45 | 0.86 | -0.14 | -0.59 | -0.96 | -0.52 | 0.25 | 0.30 | 0.68 | 0.42 | 0.12 | -0.45 | -0.23 |
| 8 GHz | INTERCEPT (mV) | 2017 | 248 | 390 | 524 | 655 | 791 | 896 | 1013 | 1136 | 1271 | 1415 | 1520 | 1645 | 1769 | 1889 | 2002 | 2140 |
| | SLOPE (mV/dB) | 24.95 | -23 | -6 | 4 | 10 | 21 | 1 | -6 | -8 | 2 | 21 | 2 | 2 | 1 | -4 | -15 | -2 |
| | LIN. ERR. (dB) | 0.923 | -0.92 | -0.23 | 0.14 | 0.39 | 0.84 | 0.05 | -0.26 | -0.33 | 0.09 | 0.86 | 0.07 | 0.08 | 0.05 | -0.14 | -0.61 | -0.08 |
| 10 GHz | INTERCEPT (mV) | 2041 | 226 | 374 | 504 | 633 | 773 | 895 | 1016 | 1142 | 1282 | 1431 | 1539 | 1673 | 1789 | 1907 | 2021 | 2149 |
| | SLOPE (mV/dB) | 25.59 | -24 | -4 | -2 | -1 | 11 | 5 | -2 | -4 | 8 | 29 | 10 | 16 | 4 | -6 | -20 | -20 |
| | LIN. ERR. (dB) | 1.152 | -0.94 | -0.16 | -0.08 | -0.04 | 0.44 | 0.20 | -0.07 | -0.14 | 0.33 | 1.15 | 0.37 | 0.61 | 0.14 | -0.25 | -0.79 | -0.79 |
| 12 GHz | INTERCEPT (mV) | 2034 | 221 | 369 | 500 | 633 | 782 | 910 | 1028 | 1156 | 1296 | 1442 | 1533 | 1658 | 1778 | 1896 | 2005 | 2137 |
| | SLOPE (mV/dB) | 25.38 | -36 | -15 | -11 | -5 | 17 | 18 | 9 | 10 | 24 | 43 | 7 | 5 | -2 | -11 | -29 | -24 |
| | LIN. ERR. (dB) | 1.68 | -1.43 | -0.59 | -0.43 | -0.19 | 0.68 | 0.72 | 0.37 | 0.41 | 0.93 | 1.68 | 0.27 | 0.19 | -0.08 | -0.43 | -1.14 | -0.94 |
| 14 GHz | INTERCEPT (mV) | 2049 | 191 | 343 | 474 | 615 | 770 | 924 | 1047 | 1183 | 1326 | 1457 | 1536 | 1662 | 1781 | 1899 | 2009 | 2143 |
| | SLOPE (mV/dB) | 25.82 | -51 | -28 | -26 | -14 | 12 | 37 | 31 | 38 | 51 | 53 | 3 | 0 | -10 | -21 | -40 | -35 |
| | LIN. ERR. (dB) | 2.067 | -1.97 | -1.08 | -1.01 | -0.55 | 0.46 | 1.42 | 1.19 | 1.45 | 1.99 | 2.07 | 0.13 | 0.01 | -0.38 | -0.81 | -1.55 | -1.36 |
| 16 GHz | INTERCEPT (mV) | 2035 | 276 | 411 | 548 | 687 | 817 | 926 | 1045 | 1178 | 1312 | 1449 | 1538 | 1666 | 1785 | 1902 | 2015 | 2146 |
| | SLOPE (mV/dB) | 24.71 | -29 | -17 | -4 | 12 | 18 | 4 | -1 | 8 | 19 | 32 | -2 | 2 | -2 | -9 | -20 | -12 |
| | LIN. ERR. (dB) | 1.308 | -1.15 | -0.69 | -0.15 | 0.48 | 0.74 | 0.15 | -0.04 | 0.34 | 0.76 | 1.31 | -0.09 | 0.09 | -0.10 | -0.36 | -0.79 | -0.49 |
| 18 GHz | INTERCEPT (mV) | 2028 | 246 | 389 | 525 | 659 | 791 | 900 | 1022 | 1150 | 1288 | 1431 | 1523 | 1647 | 1770 | 1891 | 2013 | 2160 |
| | SLOPE (mV/dB) | 25.09 | -26 | -8 | 2 | 11 | 17 | 1 | -3 | 0 | 12 | 30 | -3 | -5 | -7 | -12 | -15 | 6 |
| | LIN. ERR. (dB) | 1.195 | -1.03 | -0.33 | 0.09 | 0.43 | 0.69 | 0.03 | -0.10 | 0.00 | 0.50 | 1.19 | -0.14 | -0.20 | -0.30 | -0.47 | -0.61 | 0.25 |
| Avg. Slope: 25.2 mV/dB | | | | | | | | | | | | | | | | | | |
| Flatness dB: ±1.7 dB | | | | | | | | | | | | | | | | | | |


Video Out VS Input Power

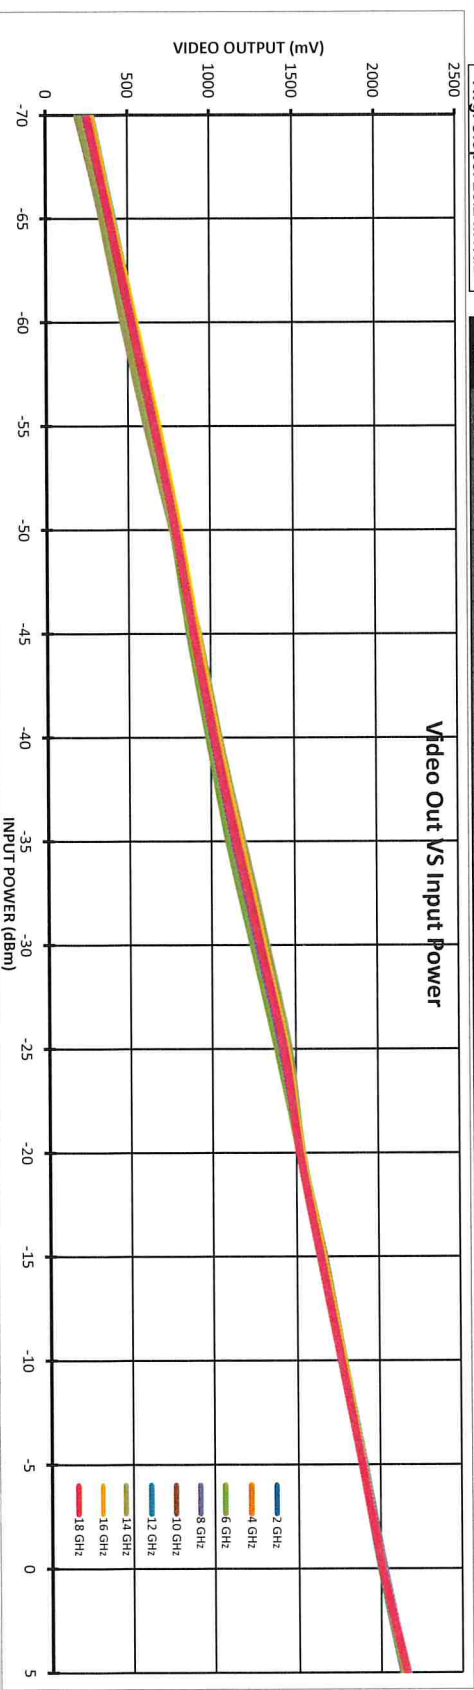

P142812


-40°C

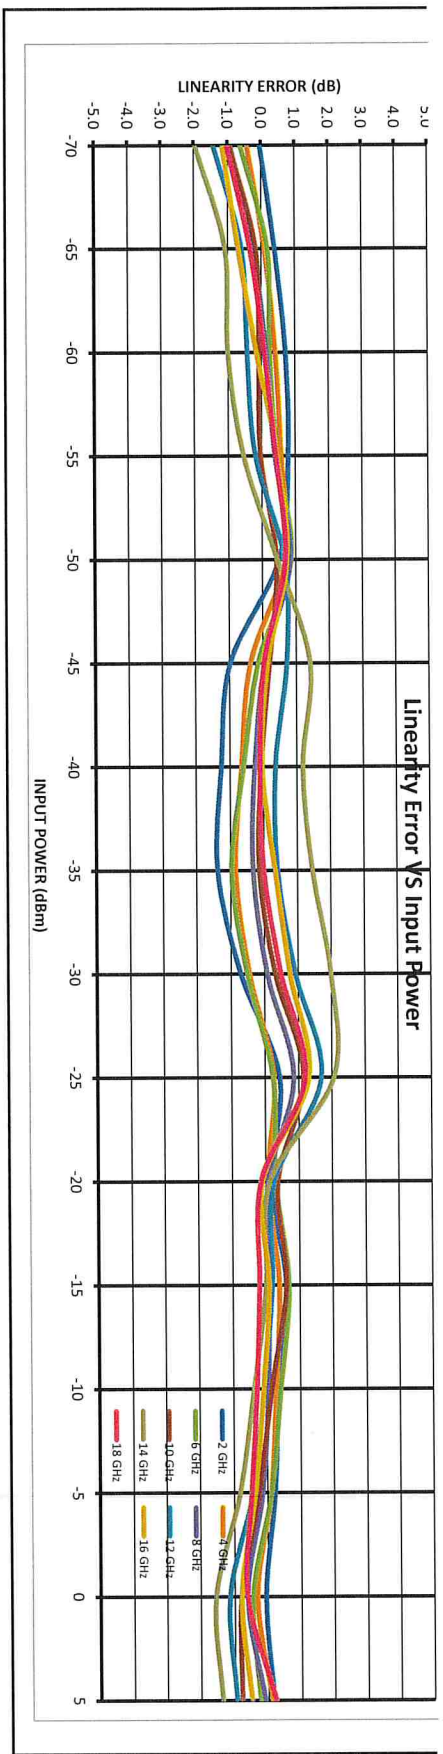



| Frequency | -70 | -65 | -60 | -55 | -50 | -45 | -40 | -35 | -30 | -25 | -20 | -15 | -10 | -5 | 0 | 5 |
|------------------------|----------------------|-----------------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|------|------|-------|
| 2 GHz | INTERCEPT (mV) | 1903 | 166 | 294 | 412 | 527 | 644 | 742 | 862 | 983 | 1116 | 1253 | 1402 | 1556 | 1688 | 1805 |
| | SLOPE (mV/dB) | 25.14 | 23 | 25 | 18 | 7 | -2 | -30 | -35 | -40 | -33 | -21 | 2 | 30 | 36 | 28 |
| | LN. ERR. (dB) | 1.6 | 0.92 | 1.01 | 0.70 | 0.28 | -0.07 | -1.17 | -1.40 | -1.59 | -1.30 | -0.85 | 0.08 | 1.20 | 1.45 | 1.10 |
| 4 GHz | INTERCEPT (mV) | 1898 | 135 | 266 | 382 | 504 | 625 | 741 | 862 | 982 | 1114 | 1244 | 1388 | 1540 | 1677 | 1794 |
| | SLOPE (mV/dB) | 25.4 | 15 | 19 | 8 | 3 | -3 | -14 | -20 | -27 | -22 | -19 | -2 | 23 | 33 | 23 |
| | LN. ERR. (dB) | 1.301 | 0.58 | 0.74 | 0.31 | 0.11 | -0.12 | -0.56 | -0.79 | -1.07 | -0.87 | -0.75 | -0.08 | 0.91 | 1.30 | 0.91 |
| 6 GHz | INTERCEPT (mV) | 1903 | 109 | 231 | 349 | 477 | 602 | 730 | 853 | 974 | 1107 | 1238 | 1387 | 1545 | 1680 | 1797 |
| | SLOPE (mV/dB) | 25.9 | 19 | 11 | 0 | -2 | -6 | -8 | -14 | -23 | -19 | -18 | 2 | 30 | 36 | 23 |
| | LN. ERR. (dB) | 1.382 | 0.73 | 0.44 | -0.01 | -0.06 | -0.24 | -0.30 | -0.55 | -0.88 | -0.74 | -0.68 | 0.07 | 1.17 | 1.38 | 0.90 |
| 8 GHz | INTERCEPT (mV) | 1899 | 110 | 233 | 351 | 478 | 605 | 738 | 868 | 987 | 1121 | 1254 | 1393 | 1532 | 1670 | 1785 |
| | SLOPE (mV/dB) | 25.72 | 11 | 5 | -5 | -7 | -8 | -4 | -2 | -12 | -7 | -2 | 8 | 19 | 28 | 15 |
| | LN. ERR. (dB) | 1.093 | 0.43 | 0.21 | -0.20 | -0.26 | -0.32 | -0.15 | -0.10 | -0.47 | -0.26 | -0.08 | 0.32 | 0.73 | 1.09 | 0.56 |
| 10 GHz | INTERCEPT (mV) | 1915 | 95 | 206 | 328 | 454 | 576 | 724 | 866 | 988 | 1122 | 1258 | 1406 | 1552 | 1683 | 1797 |
| | SLOPE (mV/dB) | 26.3 | 21 | 1 | -9 | -14 | -24 | -7 | 3 | -6 | -4 | 1 | 17 | 32 | 31 | 14 |
| | LN. ERR. (dB) | 1.377 | 0.82 | 0.04 | -0.33 | -0.54 | -0.90 | -0.27 | 0.13 | -0.23 | -0.14 | 0.03 | 0.66 | 1.21 | 1.19 | 0.53 |
| 12 GHz | INTERCEPT (mV) | 1909 | 123 | 250 | 367 | 495 | 629 | 767 | 901 | 1019 | 1154 | 1296 | 1417 | 1541 | 1675 | 1788 |
| | SLOPE (mV/dB) | 25.46 | -4 | -4 | -14 | -14 | -7 | 4 | 10 | 1 | 9 | 24 | 17 | 14 | 21 | 6 |
| | LN. ERR. (dB) | 1.467 | -0.14 | -0.16 | -0.56 | -0.53 | -0.27 | 0.15 | 0.41 | 0.05 | 0.35 | 0.92 | 0.68 | 0.55 | 0.81 | 0.25 |
| 14 GHz | INTERCEPT (mV) | 1921 | 105 | 224 | 345 | 478 | 614 | 774 | 919 | 1041 | 1173 | 1311 | 1420 | 1544 | 1677 | 1790 |
| | SLOPE (mV/dB) | 25.82 | -8 | -18 | -26 | -22 | -16 | 15 | 31 | 24 | 27 | 36 | 16 | 11 | 15 | -2 |
| | LN. ERR. (dB) | 1.85 | -0.31 | -0.71 | -1.02 | -0.87 | -0.60 | 0.59 | 1.21 | 0.93 | 1.05 | 1.39 | 0.61 | 0.41 | 0.56 | -0.06 |
| 16 GHz | INTERCEPT (mV) | 1905 | 159 | 288 | 409 | 535 | 668 | 785 | 917 | 1036 | 1167 | 1304 | 1417 | 1540 | 1674 | 1788 |
| | SLOPE (mV/dB) | 24.82 | -9 | -4 | -7 | -5 | 4 | -3 | 5 | 0 | 7 | 19 | 8 | 7 | 17 | 7 |
| | LN. ERR. (dB) | 1.059 | -0.35 | -0.15 | -0.27 | -0.20 | 0.16 | -0.13 | 0.19 | -0.02 | 0.26 | 0.78 | 0.33 | 0.29 | 0.69 | 0.28 |
| 18 GHz | INTERCEPT (mV) | 1896 | 130 | 258 | 375 | 500 | 621 | 747 | 883 | 1001 | 1138 | 1273 | 1395 | 1526 | 1662 | 1778 |
| | SLOPE (mV/dB) | 25.32 | 6 | 7 | -2 | -4 | -10 | -10 | -1 | -9 | 1 | 10 | 5 | 9 | 19 | 8 |
| | LN. ERR. (dB) | 0.742 | 0.23 | 0.28 | -0.10 | -0.16 | -0.38 | -0.40 | -0.03 | -0.37 | 0.04 | 0.38 | 0.19 | 0.37 | 0.74 | 0.32 |
| Avg. Slope: 25.5 mV/dB | | | | | | | | | | | | | | | | |
| | | 1.4 | 1.7 | 1.6 | 1.6 | 1.8 | 1.2 | 1.3 | 1.3 | 1.3 | 1.4 | 0.6 | 0.6 | 0.5 | 0.5 | 0.4 |
| | | Flatness: dB: ±1.8 dB | | | | | | | | | | | | | | |
| | Measured Value (mV) | | | | | | | | | | | | | | | |
| | ERROR (mV) | | | | | | | | | | | | | | | |
| | LINEARITY ERROR (dB) | | | | | | | | | | | | | | | |


Video Out VS Input Power

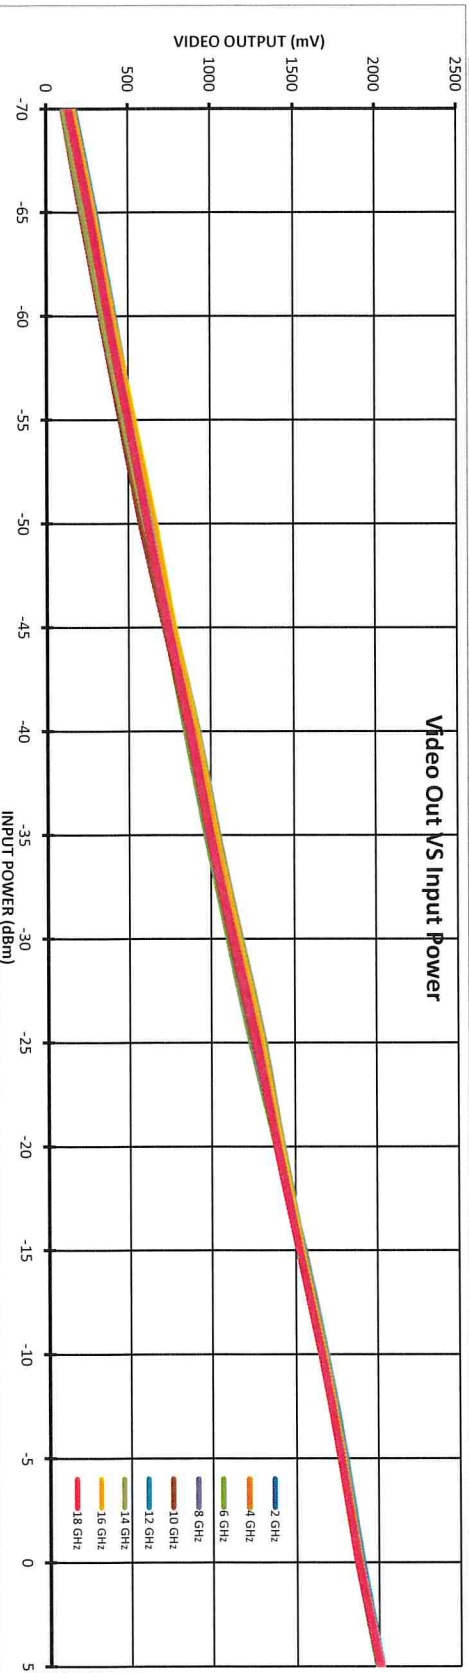

Model Number: SDLVA-2G18G-CD-2-OPT218
Serial Number: PL42812

Temperature: +25C

VSWR GRAPH

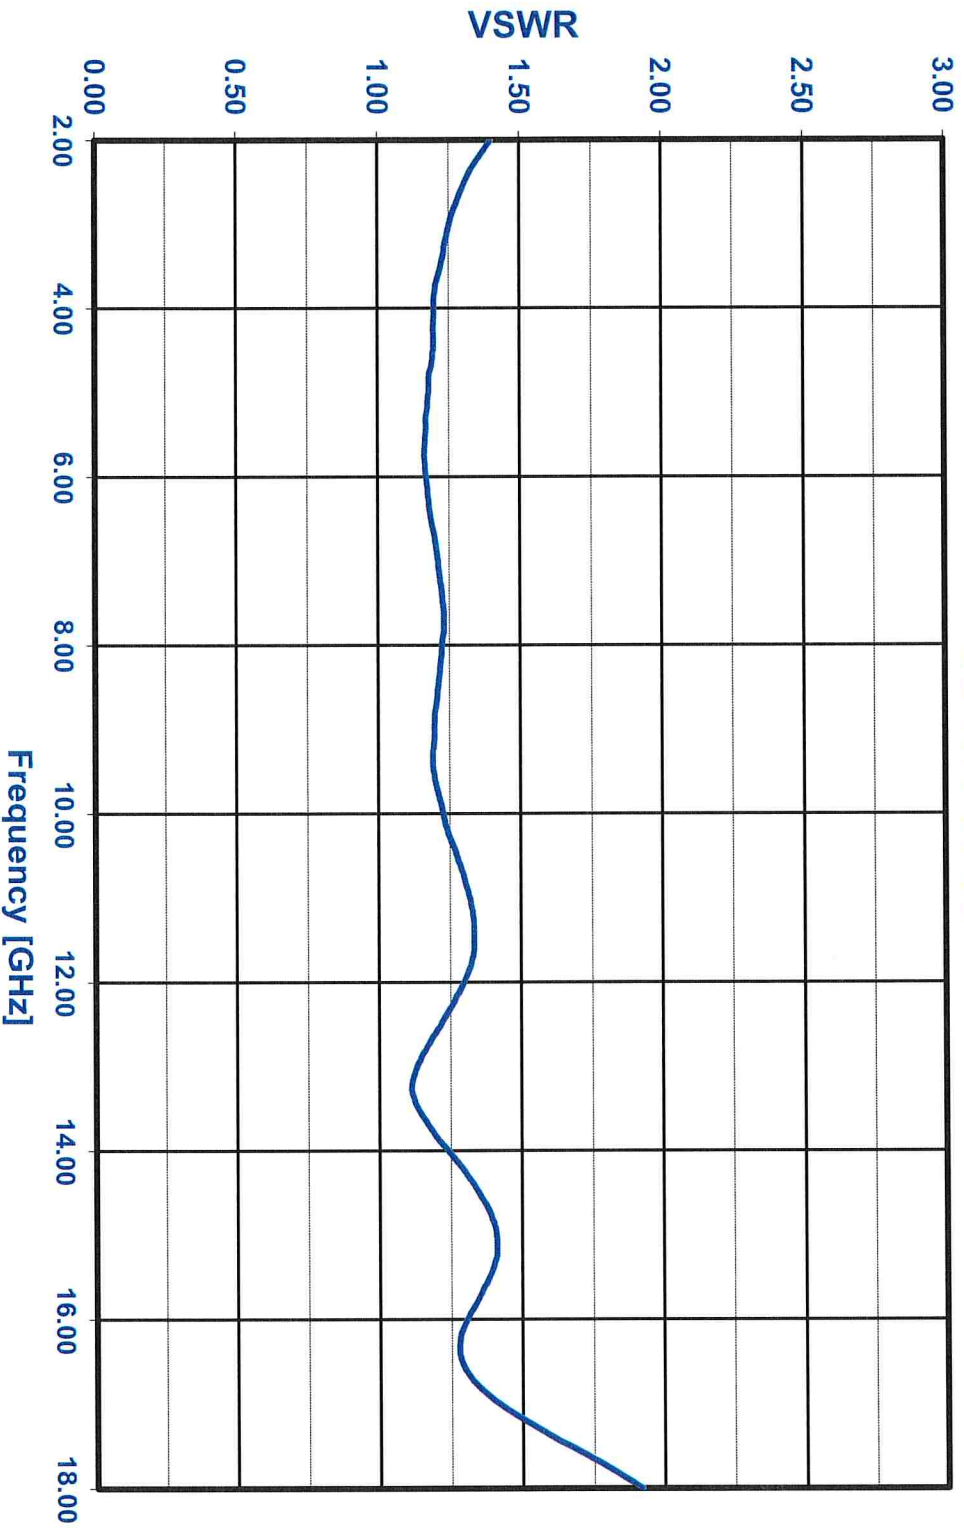


PL42812

Rise Time

DSO-X 3034A, MY52394003, Fri Nov 10 11:55:52 2023

1 2 300%/ 3 4 4.000ms 20.00%/ Stop f 4 2.20V

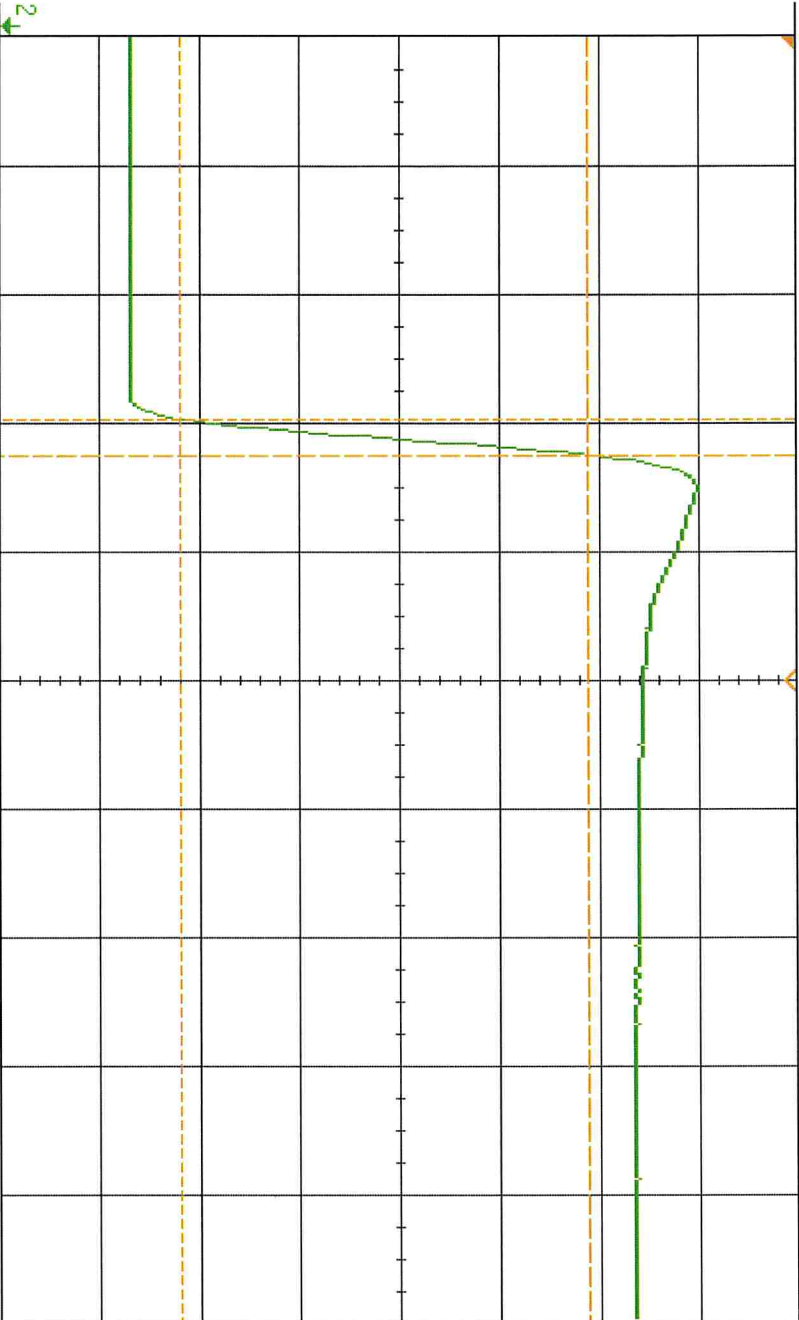

Measurement Menu

Source 2

Type: Rise

Add Measurement

Settings

Clear Meas

Statistics

KEYSIGHT TECHNOLOGIES

Acquisition
Averaging: 32
4.00GSa/s


Channels
DC 1.00:1
DC 1.00:1
DC 1.00:1
DC 1.00:1

Measurements
Fall(2): No edges
Rise(2): 5.8ns

PL42812
RECOVERY

DSO-X 3034A, MY52394003, Fri Nov 10 11:57:03 2023

1 2 300ns / 3 4 4.050ns 100.0ns / Auto f 4 2.20V

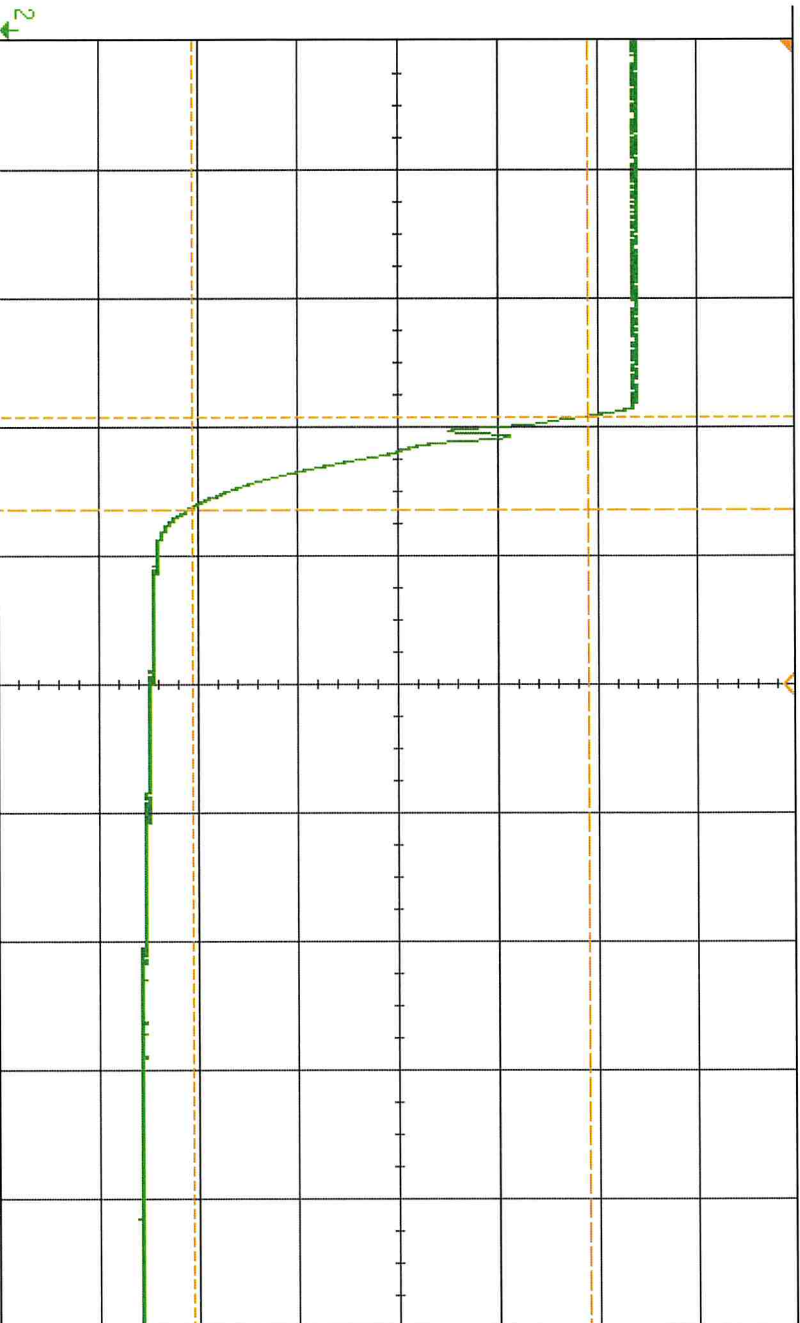

Measurement Menu

Source 2

Type: Fall

Add Measurement

Settings

Clear Meas

Statistics


| | |
|-----------------------|--|
| KEYSIGHT TECHNOLOGIES | |
| Acquisition | Averaging: 32 4.00GSa/s |
| Channels | DC 1.00:1 DC 1.00:1 DC 1.00:1 DC 1.00:1 |
| Measurements | Rise(2): No edges Fall(2): 71.0ns |

PL42812

TSS -71

DSO-X 3034A, MY52394003 Fri Nov 10 11:51:18 2023

1 2 100% / 3 4 4.050µs 20.00µs / Auto F 4 1.78V

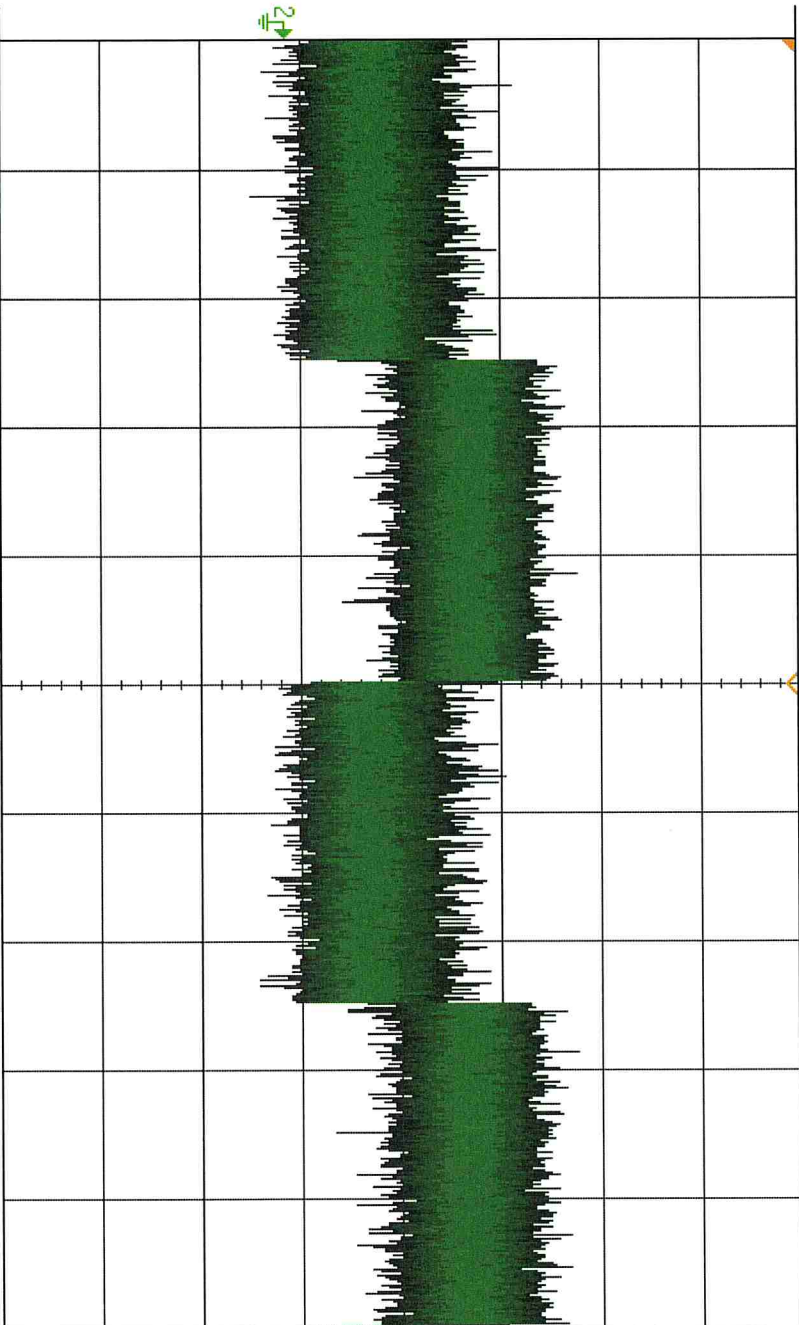

| | |
|-----------------------|--------|
| KEYSIGHT TECHNOLOGIES | |
| Acquisition | Normal |
| 4.00GS/s | |
| Channels | |
| DC | 1.00:1 |
| DC | 1.00:1 |
| DC | 1.00:1 |
| DC | 1.00:1 |

Save to file = pl42812_tss_71

Save

Recall

Default/Erase

Press to Save