



**Summary Data
For
EWDM-2G6G-65-70MV-1**


Customer: <u>PMI RF</u>	Tested By: <u>Fred Cortes</u>
SO No: <u>10000000</u>	Temperature: <u>0°C TO +85°C</u>
Model No: <u>EWDM-2G6G-65-70MV-1</u>	Date <u>6/27/2024</u>
Serial No: <u>PL46505/2426</u>	Drawing No: <u>27637945</u> Rev: <u>A1</u>

TEST ITEM NO	PARAMETERS	SPECIFIED VALUE	TEST RESULTS	QA QC
1	Frequency Range:	2 to 6 GHz	2 to 6 GHz	PMI QA3
2	VSWR:	2.0:1 MAX @ 50 Ω	1.22:1 @ 50 Ω (RF IN) 1.21:1 @ 50 Ω (BIT IN) 1.36:1 @ 50 Ω (RF OUT) 1.53:1 @ 50 Ω (SW OUT)	
3	Noise Figure:	6 dB MAX	4.6 dB	
4	Input Power:	(1) 1 W CW, Max. (2) 100 W Peak @ PW = 1 us & Duty Cycle = 1%, Max.	PASS	
5	TTL Control	See Logic Table	PASS	
6	SP3T Switch Isolation	60 dB MIN (All Ports)	> 60 dB	
7	SP3T Switching Speed:	100 ns MAX	50 ns	
8	RF OUT Linear Gain	+33 dB MIN, 39 dB MAX	+37.43 dB MAX +35.32 dB MIN	
9	RF OUT Frequency Flatness:	±2.0 dB MAX	±1 dB	
10	RF OUT 1 dB Compression Point:	+3 dBm MIN	+10.4 dBm	
11	RF OUT Second Harmonic:	-9 dBc MIN	-29 dBc	
12	RF OUT Third Harmonic:	-12 dBc MIN	-52 dBc	



**Summary Data
For
EWDM-2G6G-65-70MV-1**

13	SW Linear Gain	+7 dB MIN, 15 dB MAX	+13.33 dB MAX +11.31 dB MIN	PMI QA3
14	SW Frequency Flatness:	±1.2 dB MAX	±1 dB	
15	SW 1 dB Compression Point:	+3 dBm MIN	+7.27 dBm	
16	SW Second Harmonic:	-9 dBc MIN	-20 dBc	
17	SW Third Harmonic:	-12 dBc MIN	-40 dBc	
18	VIDEO OUT TSS:	-71 dBm MAX	-71 dBm	
19	VIDEO OUT Dynamic Range:	-65 to 0 dBm	-65 to 0 dBm	
20	VIDEO OUT Log Slope Fixed:	70 ± 3mV/dB	70.8 mV/dB	
21	VIDEO OUT Log Linearity:	±0.75 dB MAX @ 4 GHZ	±0.25 dB	
22	VIDEO OUT Log Accuracy:	±1.25 dB MAX	±0.92 dB	
23	VIDEO OUT Absolute Log Accuracy:	±1.5 dB MAX	±1.36 dB	
24	VIDEO OUT DC Offset:	0 ±70 mV (RF Input Terminated & DC Power On)	-22 mV	
25	VIDEO OUT Rise Time (10% to 90%):	25 ns TYP 28 ns MAX	25.8 ns	
26	VIDEO OUT Fall Time (90% to 10%):	300 ns MAX	136.9 ns	
27	VIDEO OUT Settling Time:	50 ns With in ±70 mV of final value, MAX	>50 ns	
28	VIDEO OUT Recovery Time:	0.5 us MAX to within 1 dB of baseline	0.45 us	



**Summary Data
For
EWDM-2G6G-65-70MV-1**

29	VIDEO OUT Video Frequency Flatness:	± 1.0 dB MAX	± 0.69 dB	PMI QA3
30	VIDEO OUT CW Immunity:	A. CW Immune Power TSS to -40 dBm Baseline Shift: 200 mV MAX	< 200 mV	
		B. Pulse Peak Amplitude Loss; 2 dB MAX	< 2 dB	
		CW Immunity Time at CW = -40 dBm, ≤ 4 ms	1.9 ms	
		CW Recovery Time at CW = -40 dBm, ≤ 50 us	< 50 us	
31	VIDEO OUT Pulse Response, input Signal:	100 ns to 300 us	100 ns to 300 us	
32	VIDEO OUT load Impedance:	$75 \pm 1 \Omega$	75 Ω	
33	VIDEO OUT Video Output driver capability	150 ft. RG11 into 75 ohm load	PASS	
34	Pulse density capability:	10% duty cycle 100ns; 70% duty cycle 300us at peak power -10 dBm with 1 dB variable for pulse amplitude and baseline	PASS	
35	VIDEO OUT Noise Level (Vp-p):	150 mV TYP	< 150 mV	



**Summary Data
For
EWDM-2G6G-65-70MV-1**

36	Droop of the Output Video Pulse @ 300us & - 65 dBm	70mV (1 dB) MAX	< 70 mV	PMI QA3
37	VIDEO OUT Propagation Delay:	50 ns MAX Excluding cable	40 ns	
38	Power Supply	+15 V @ 1000 mA MAX -15 V @ 500 mA MAX	+15 V @ 622 mA -15 V @ 135 mA	
39	Power Supply Ripple From DC to 10 MHz	100 mV MAX	PASS	

QA/QC Approval:

A. Luter

Date:

6-27-24



Summary Data For EWDM-2G6G-65-70MV-1

Model: EWDM-2G6G-65-70MV-1
Serial No: PL46505
Date: 06/27/2024
Tested By: F. Cortes
Test Temp: +25°C
Input Port: RF Port



DC Offset: -15 mV

Frequency

2 GHz	INTERCEPT (mV)	4851
	SLOPE (mV/dB)	70.5
	MAX LIN ERROR	0.41
	MAX ACC ERROR	0.59

-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
274	620	963	1321	1691	2032	2379	2714	3069	3449	3805	4172	4514	4822
7	1	-9	-4	14	2	-4	-21	-19	8	12	26	15	-29
0.10	0.01	-0.13	-0.05	0.19	0.03	-0.05	-0.30	-0.27	0.12	0.17	0.37	0.22	-0.41
-0.03	-0.13	-0.27	-0.19	0.05	-0.12	-0.20	-0.45	-0.42	-0.04	0.00	0.20	0.05	-0.59

RF Input Power (dBm)
Measured Value (mV)
ERROR (mV)
LINEARITY ERROR (dB)
LOG ACCURACY (dB)

3 GHz	INTERCEPT (mV)	4901
	SLOPE (mV/dB)	70.7
	MAX LIN ERROR	0.21
	MAX ACC ERROR	0.64

304	655	1003	1360	1733	2071	2427	2778	3124	3494	3840	4197	4551	4892
1	-2	-8	-4	15	-1	2	-1	-9	8	0	3	4	-9
0.01	-0.03	-0.11	-0.05	0.21	-0.01	0.02	-0.01	-0.12	0.11	0.00	0.05	0.05	-0.13
0.40	0.37	0.30	0.36	0.64	0.43	0.48	0.45	0.35	0.60	0.50	0.56	0.57	0.41

RF Input Power (dBm)
Measured Value (mV)
ERROR (mV)
LINEARITY ERROR (dB)
LOG ACCURACY (dB)

4 GHz	INTERCEPT (mV)	4868
	SLOPE (mV/dB)	70.6
	MAX LIN ERROR	0.25
	MAX ACC ERROR	0.27

272	621	964	1326	1697	2036	2392	2745	3091	3444	3786	4147	4497	4876
3	-1	-11	-3	16	1	5	5	-2	-2	-13	-5	-8	18
0.04	-0.02	-0.16	-0.05	0.22	0.01	0.07	0.07	-0.03	-0.03	-0.19	-0.07	-0.12	0.25
-0.06	-0.11	-0.25	-0.14	0.13	-0.08	-0.02	-0.02	-0.11	-0.11	-0.27	-0.15	-0.19	0.18

RF Input Power (dBm)
Measured Value (mV)
ERROR (mV)
LINEARITY ERROR (dB)
LOG ACCURACY (dB)

5 GHz	INTERCEPT (mV)	4841
	SLOPE (mV/dB)	70.4
	MAX LIN ERROR	0.25
	MAX ACC ERROR	0.49

264	615	956	1318	1687	2030	2385	2732	3075	3426	3770	4131	4483	4858
0	-1	-12	-2	15	6	9	4	-5	-6	-14	-5	-5	17
0.00	-0.01	-0.17	-0.03	0.21	0.08	0.13	0.05	-0.07	-0.09	-0.20	-0.08	-0.08	0.25
-0.17	-0.20	-0.36	-0.24	-0.01	-0.15	-0.12	-0.20	-0.34	-0.37	-0.49	-0.38	-0.39	-0.08

RF Input Power (dBm)
Measured Value (mV)
ERROR (mV)
LINEARITY ERROR (dB)
LOG ACCURACY (dB)

6 GHz	INTERCEPT (mV)	4827
	SLOPE (mV/dB)	70.6
	MAX LIN ERROR	0.61
	MAX ACC ERROR	0.87



248	596	935	1295	1663	2008	2360	2707	3053	3397	3743	4115	4476	4863
9	4	-9	-2	13	5	4	-2	-9	-18	-25	-6	2	36
0.13	0.06	-0.13	-0.03	0.18	0.07	0.05	-0.03	-0.13	-0.26	-0.35	-0.09	0.03	0.51
-0.40	-0.48	-0.66	-0.56	-0.35	-0.46	-0.47	-0.55	-0.65	-0.78	-0.87	-0.60	-0.49	0.00

RF Input Power (dBm)
Measured Value (mV)
ERROR (mV)
LINEARITY ERROR (dB)
LOG ACCURACY (dB)

AVG. SLOPE: 70.6 mV/dB

0.40	0.43	0.48	0.46	0.50	0.45	0.47	0.50	0.50	0.69	0.69	0.58	0.53	0.50
------	------	------	------	------	------	------	------	------	------	------	------	------	------

Flatness dB: ±0.69 dB

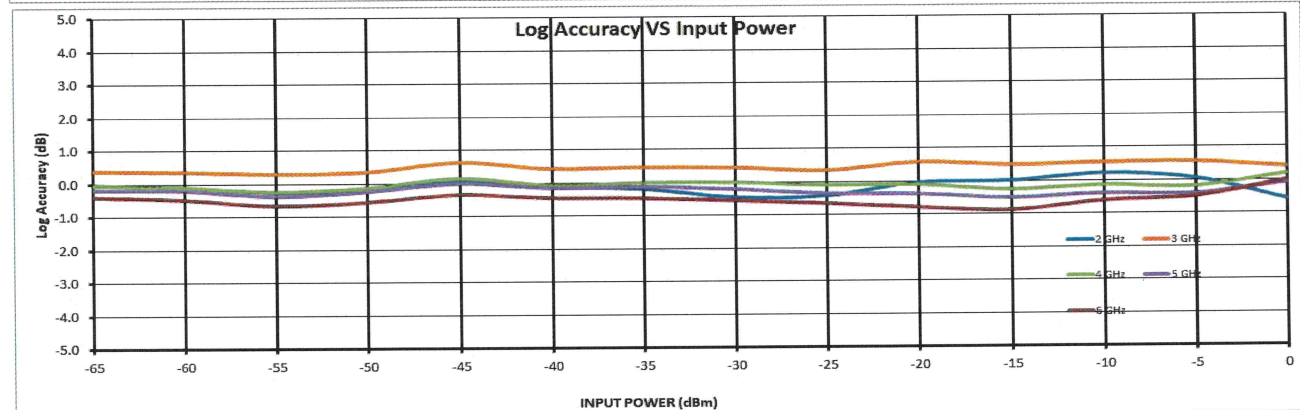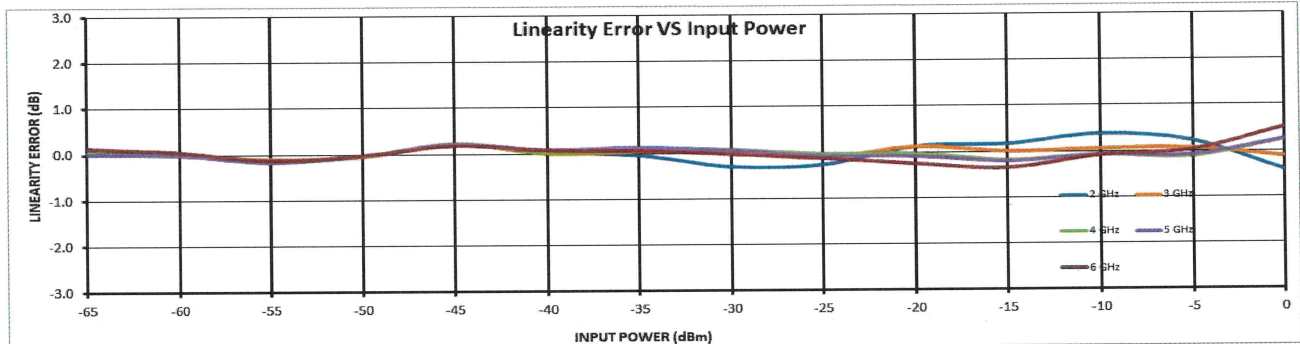



Summary Data For EWDM-2G6G-65-70MV-1

Model: EWDM-2G6G-65-70MV-1
Serial No: PL46505
Date: 06/27/2024
Tested By: F. Cortes
Test Temp: +25°C
Input Port: BIT Port

DC Offset: -22 mV



Frequency

2 GHz	INTERCEPT (mV)	4834
	SLOPE (mV/dB)	70.8
	MAX LIN ERROR	0.36
	MAX ACC ERROR	0.52

3 GHz	INTERCEPT (mV)	4877
	SLOPE (mV/dB)	70.8
	MAX LIN ERROR	0.19
	MAX ACC ERROR	0.59

4 GHz	INTERCEPT (mV)	4836
	SLOPE (mV/dB)	70.7
	MAX LIN ERROR	0.24
	MAX ACC ERROR	0.31

5 GHz	INTERCEPT (mV)	4819
	SLOPE (mV/dB)	70.6
	MAX LIN ERROR	0.3
	MAX ACC ERROR	0.53

6 GHz	INTERCEPT (mV)	4804
	SLOPE (mV/dB)	70.7
	MAX LIN ERROR	0.54
	MAX ACC ERROR	0.92

AVG. SLOPE: 70.7 mV/dB

	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
2 GHz	242	587	931	1293	1660	2002	2350	2687	3046	3422	3779	4148	4504	4809
	10	1	-9	-1	12	0	-6	-23	-18	4	7	22	24	-25
	0.16	0.02	-0.12	-0.01	0.17	0.00	-0.08	-0.32	-0.25	0.06	0.10	0.31	0.34	-0.36
	-0.11	-0.23	-0.36	-0.24	-0.05	-0.21	-0.28	-0.52	-0.44	-0.12	-0.07	0.15	0.19	-0.50
3 GHz	275	632	977	1335	1705	2044	2400	2751	3102	3469	3813	4172	4527	4870
	-1	2	-7	-3	13	-2	0	-3	-5	8	-2	3	4	-7
	-0.02	0.03	-0.10	-0.04	0.19	-0.02	0.01	-0.04	-0.08	0.11	-0.03	0.04	0.06	-0.10
	0.36	0.41	0.29	0.36	0.59	0.39	0.42	0.39	0.36	0.55	0.41	0.49	0.52	0.37
4 GHz	245	595	938	1300	1668	2008	2366	2719	3071	3420	3762	4123	4474	4852
	3	0	-11	-2	13	-1	4	4	2	-2	-13	-6	-8	17
	0.04	-0.01	-0.16	-0.03	0.18	-0.01	0.06	0.05	0.03	-0.03	-0.19	-0.08	-0.11	0.24
	-0.06	-0.11	-0.26	-0.14	0.07	-0.12	-0.06	-0.06	-0.08	-0.15	-0.31	-0.20	-0.23	0.11
5 GHz	242	586	929	1293	1660	2005	2360	2706	3056	3403	3746	4107	4460	4840
	5	-3	-13	-1	13	6	8	2	-1	-6	-16	-7	-7	21
	0.07	-0.05	-0.18	-0.02	0.19	0.08	0.12	0.02	-0.01	-0.09	-0.22	-0.10	-0.09	0.30
	-0.11	-0.24	-0.39	-0.24	-0.05	-0.16	-0.14	-0.25	-0.30	-0.39	-0.53	-0.43	-0.43	-0.06
6 GHz	224	566	907	1270	1633	1982	2333	2681	3033	3373	3719	4090	4452	4843
	13	2	-10	-1	9	4	2	-3	-5	-18	-25	-8	1	39
	0.19	0.03	-0.15	-0.01	0.13	0.06	0.03	-0.05	-0.07	-0.25	-0.36	-0.11	0.01	0.54
	-0.36	-0.52	-0.70	-0.56	-0.43	-0.49	-0.52	-0.60	-0.62	-0.81	-0.92	-0.67	-0.55	-0.01
AVG. SLOPE	0.36	0.47	0.50	0.46	0.51	0.44	0.47	0.50	0.49	0.68	0.66	0.58	0.53	0.43

RF Input Power (dBm)	
Measured Value (mV)	
ERROR (mV)	
LINEARITY ERROR (dB)	
LOG ACCURACY (dB)	



Measured Value (mV)	
ERROR (mV)	
LINEARITY ERROR (dB)	
LOG ACCURACY (dB)	

Measured Value (mV)	
Error (mV)	
LINEARITY ERROR (dB)	
LOG ACCURACY (dB)	

Measured Value (mV)	
ERROR (mV)	
LINEARITY ERROR (dB)	
LOG ACCURACY (dB)	

Measured Value (mV)	
Error (mV)	
LINEARITY ERROR (dB)	
LOG ACCURACY (dB)	

Flatness dB: ±0.68 dB

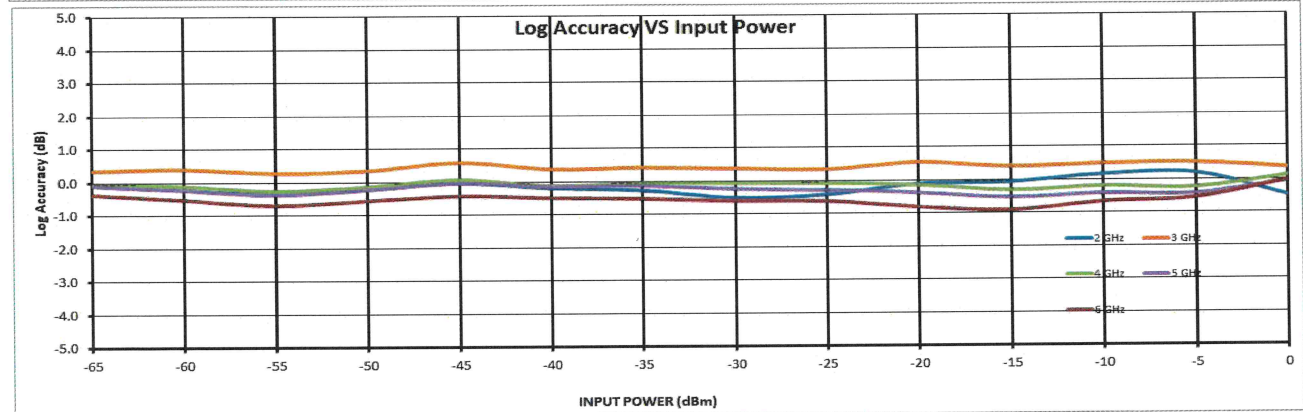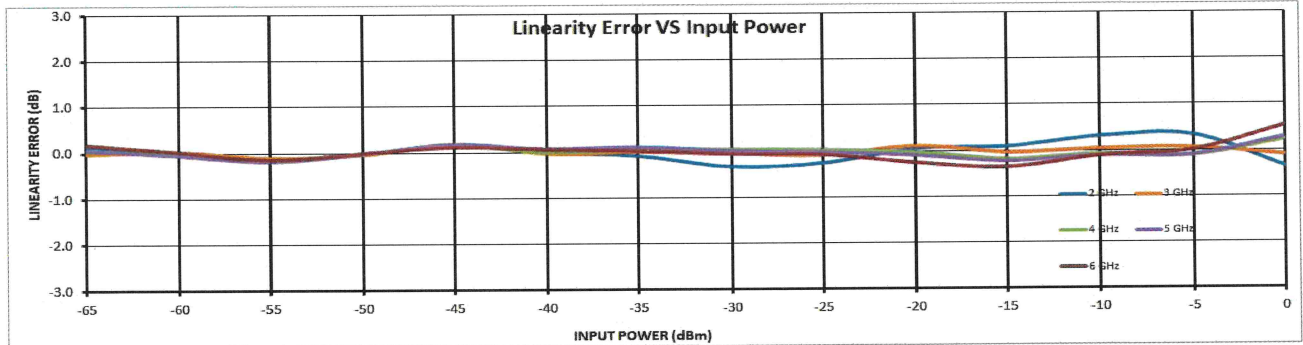



Summary Data For EWDM-2G6G-65-70MV-1

Model: EWDM-2G6G-65-70MV-1
Serial No: PL46505
Date:: 06/27/2024
Tested By: F. Cortes
Test Temp: 0°C
Input Port: RF Port

DC Offset: 16 mV



Frequency

2 GHz	INTERCEPT (mV)	4917
	SLOPE (mV/dB)	70.8
	MAX LIN ERROR	0.47
	MAX ACC ERROR	0.58

3 GHz	INTERCEPT (mV)	4956
	SLOPE (mV/dB)	70.8
	MAX LIN ERROR	0.32
	MAX ACC ERROR	0.69

4 GHz	INTERCEPT (mV)	4906
	SLOPE (mV/dB)	70.4
	MAX LIN ERROR	0.36
	MAX ACC ERROR	0.34

5 GHz	INTERCEPT (mV)	4889
	SLOPE (mV/dB)	70.3
	MAX LIN ERROR	0.39
	MAX ACC ERROR	0.61

6 GHz	INTERCEPT (mV)	4874
	SLOPE (mV/dB)	70.3
	MAX LIN ERROR	0.63
	MAX ACC ERROR	0.96

AVG. SLOPE: 70.5 mV/dB

-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
328	668	1014	1374	1755	2094	2440	2770	3114	3499	3858	4226	4585	4907
12	-2	-10	-4	23	8	0	-24	-33	-2	3	17	22	-10
0.17	-0.03	-0.14	-0.06	0.33	0.12	0.01	-0.33	-0.47	-0.03	0.04	0.24	0.31	-0.14
-0.08	-0.26	-0.35	-0.25	0.16	-0.04	-0.13	-0.45	-0.58	-0.12	-0.03	0.19	0.28	-0.15

-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
358	702	1053	1413	1793	2132	2484	2828	3166	3540	3892	4248	4601	4959
3	-7	-10	-4	23	8	6	-4	-20	1	-1	1	0	4
0.04	-0.10	-0.14	-0.05	0.32	0.11	0.08	-0.05	-0.28	0.01	-0.02	0.01	0.00	0.06
0.35	0.22	0.20	0.31	0.69	0.50	0.49	0.37	0.16	0.47	0.46	0.50	0.51	0.59

-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
329	674	1021	1383	1762	2099	2451	2795	3132	3488	3836	4196	4543	4928
0	-7	-12	-2	25	10	10	2	-13	-9	-13	-5	-10	23
0.00	-0.10	-0.17	-0.03	0.36	0.14	0.14	0.03	-0.18	-0.13	-0.18	-0.07	-0.14	0.33
-0.06	-0.17	-0.25	-0.12	0.25	0.03	0.02	-0.10	-0.32	-0.27	-0.34	-0.23	-0.31	0.15

-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
319	660	1004	1368	1748	2090	2442	2778	3114	3469	3817	4178	4529	4916
3	-8	-15	-3	25	15	16	0	-16	-13	-16	-7	-8	27
0.04	-0.11	-0.22	-0.05	0.36	0.22	0.22	0.00	-0.23	-0.18	-0.23	-0.10	-0.11	0.39
-0.21	-0.37	-0.49	-0.33	0.06	-0.09	-0.10	-0.34	-0.58	-0.54	-0.61	-0.49	-0.51	-0.02

-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
309	653	994	1356	1734	2075	2423	2758	3094	3440	3792	4165	4524	4919
7	-1	-12	-1	25	14	11	-6	-22	-28	-27	-6	1	45
0.10	-0.01	-0.17	-0.02	0.35	0.20	0.16	-0.09	-0.31	-0.39	-0.39	-0.08	0.02	0.63
-0.35	-0.47	-0.63	-0.50	-0.14	-0.31	-0.37	-0.62	-0.86	-0.95	-0.96	-0.67	-0.58	0.02

-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
0.35	0.35	0.42	0.40	0.42	0.40	0.43	0.50	0.51	0.71	0.71	0.59	0.55	0.37

RF Input Power (dBm)

Measured Value (mV)
ERROR (mV)
LINEARITY ERROR (dB)
LOG ACCURACY (dB)



Measured Value (mV)
ERROR (mV)
LINEARITY ERROR (dB)
LOG ACCURACY (dB)


Measured Value (mV)
ERROR (mV)
LINEARITY ERROR (dB)
LOG ACCURACY (dB)

Measured Value (mV)
ERROR (mV)
LINEARITY ERROR (dB)
LOG ACCURACY (dB)

Measured Value (mV)
ERROR (mV)
LINEARITY ERROR (dB)
LOG ACCURACY (dB)

Flatness dB: ±0.71 dB

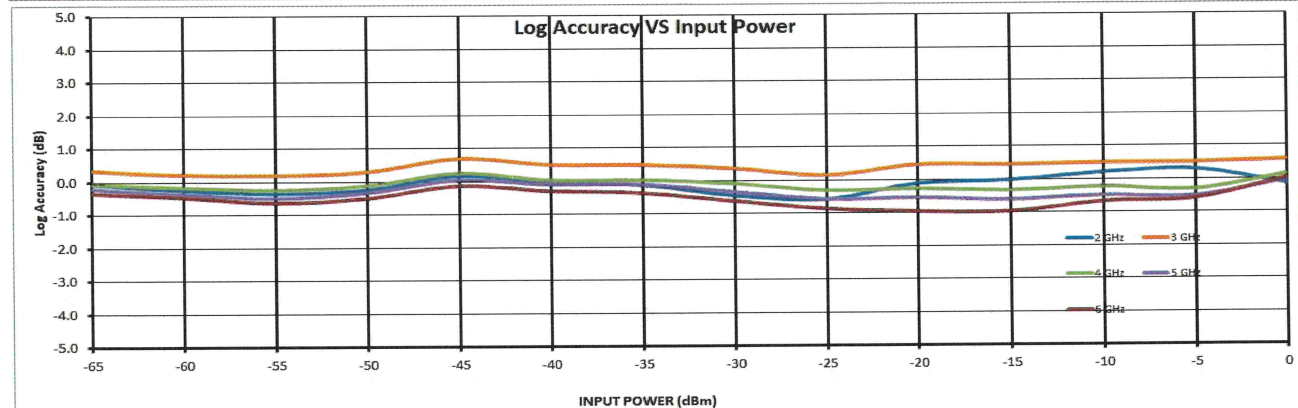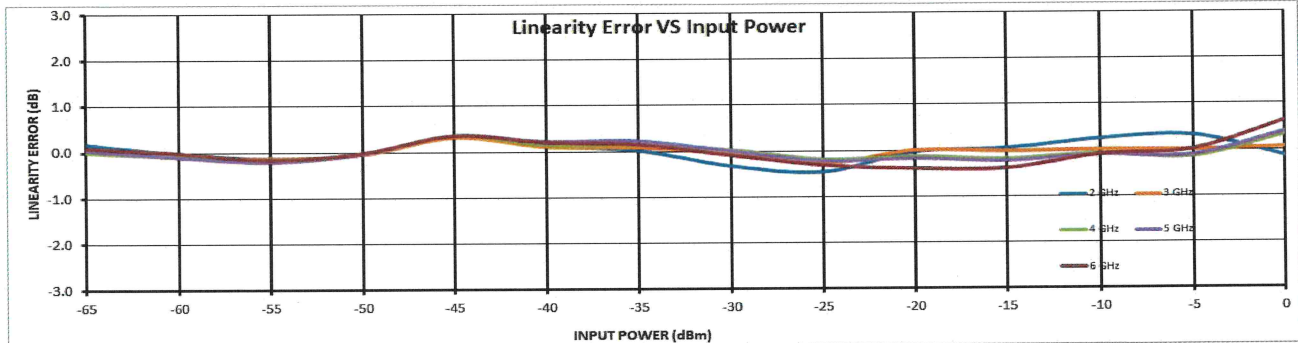



Summary Data For EWDM-2G6G-65-70MV-1

Model: EWDM-2G6G-65-70MV-1
Serial No: PL46505
Date: 06/27/2024
Tested By: F. Cortes
Test Temp: +85°C
Input Port: RF Port

DC Offset: -67 mV



Frequency

2 GHz	INTERCEPT (mV)	4603
	SLOPE (mV/dB)	69.3
	MAX LIN ERROR	0.85
	MAX ACC ERROR	1.36

3 GHz	INTERCEPT (mV)	4669
	SLOPE (mV/dB)	69.7
	MAX LIN ERROR	0.68
	MAX ACC ERROR	0.86

4 GHz	INTERCEPT (mV)	4632
	SLOPE (mV/dB)	70.2
	MAX LIN ERROR	0.64
	MAX ACC ERROR	0.73

5 GHz	INTERCEPT (mV)	4616
	SLOPE (mV/dB)	69.7
	MAX LIN ERROR	0.5
	MAX ACC ERROR	0.63

6 GHz	INTERCEPT (mV)	4602
	SLOPE (mV/dB)	70.2
	MAX LIN ERROR	0.46
	MAX ACC ERROR	1.2

AVG. SLOPE: 69.8 mV/dB

	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
2 GHz	104	423	779	1131	1483	1836	2179	2525	2895	3246	3589	3933	4243	4544
	6	-22	-12	-7	-1	5	2	1	24	29	25	23	-14	-69
	0.08	-0.31	-0.18	-0.10	-0.02	0.07	0.02	0.01	0.35	0.42	0.37	0.33	-0.20	-0.85
	0.03	-0.40	-0.30	-0.26	-0.22	-0.16	-0.24	-0.29	0.01	0.04	-0.04	-0.12	-0.67	-1.36
3 GHz	131	478	825	1179	1536	1885	2236	2598	2954	3296	3628	3983	4314	4622
	-9	-11	-12	-6	2	3	6	19	27	20	4	11	-7	-47
	-0.13	-0.15	-0.17	-0.09	0.03	0.04	0.08	0.28	0.38	0.29	0.06	0.15	-0.10	-0.68
	0.42	0.39	0.36	0.43	0.54	0.54	0.57	0.76	0.86	0.76	0.51	0.60	0.34	-0.25
4 GHz	88	400	761	1115	1467	1823	2176	2549	2916	3243	3569	3929	4272	4614
	17	-22	-12	-8	-7	-2	0	22	38	14	-11	-2	-9	-18
	0.24	-0.31	-0.17	-0.12	-0.10	-0.03	0.00	0.31	0.54	0.20	-0.15	-0.02	-0.13	-0.26
	-0.20	-0.73	-0.56	-0.49	-0.44	-0.34	-0.29	0.06	0.31	0.00	-0.33	-0.17	-0.26	-0.36
5 GHz	93	413	772	1125	1478	1834	2185	2545	2908	3233	3560	3917	4255	4595
	8	-22	-11	-7	-2	6	8	20	35	11	-10	-1	-12	-20
	0.09	-0.32	-0.16	-0.10	-0.03	0.08	0.12	0.29	0.50	0.16	-0.15	-0.02	-0.17	-0.29
	-0.13	-0.54	-0.40	-0.34	-0.29	-0.19	-0.16	0.00	0.20	-0.14	-0.46	-0.35	-0.50	-0.63
6 GHz	73	367	735	1085	1433	1795	2143	2509	2878	3198	3529	3897	4249	4608
	33	-24	-7	-8	-11	0	-3	12	30	-1	-21	-3	-2	6
	0.46	-0.35	-0.10	-0.12	-0.16	0.00	-0.04	0.17	0.43	-0.01	-0.29	-0.05	-0.03	0.08
	-0.42	-1.20	-0.93	-0.92	-0.93	-0.75	-0.76	-0.52	-0.23	-0.65	-0.90	-0.63	-0.59	-0.45
AVG. SLOPE	0.42	0.80	0.64	0.67	0.74	0.64	0.67	0.64	0.54	0.70	0.71	0.62	0.51	0.56

RF Input Power (dBm)

Measured Value (mV)	
ERROR (mV)	
LINEARITY ERROR (dB)	
LOG ACCURACY (dB)	



Measured Value (mV)	
ERROR (mV)	
LINEARITY ERROR (dB)	
LOG ACCURACY (dB)	

Measured Value (mV)	
ERROR (mV)	
LINEARITY ERROR (dB)	
LOG ACCURACY (dB)	

Measured Value (mV)	
ERROR (mV)	
LINEARITY ERROR (dB)	
LOG ACCURACY (dB)	

Measured Value (mV)	
ERROR (mV)	
LINEARITY ERROR (dB)	
LOG ACCURACY (dB)	


Flatness dB: ±0.8 dB

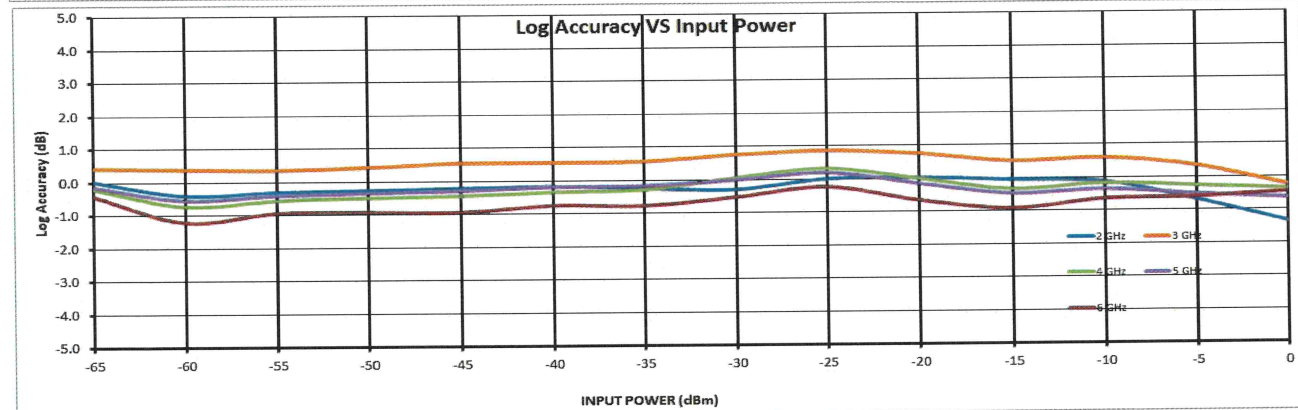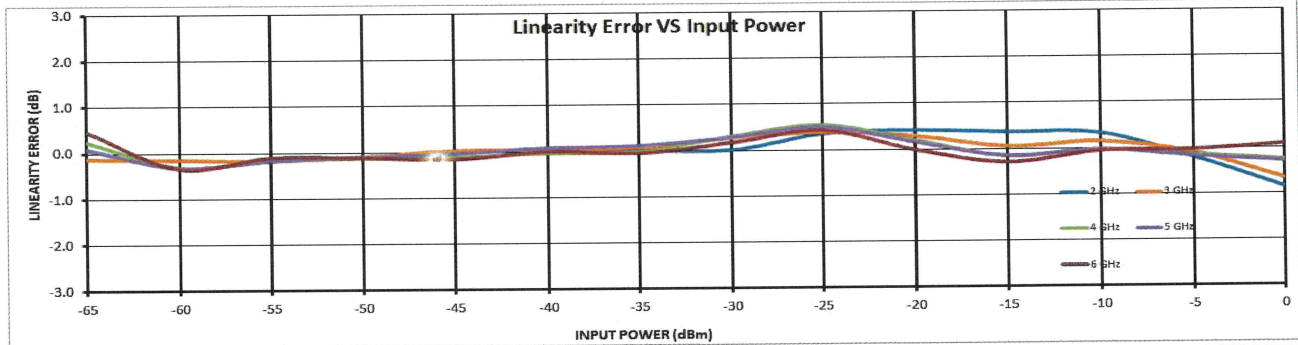




Summary Data
For
EWDM-2G6G-65-70MV-1

Rise Time

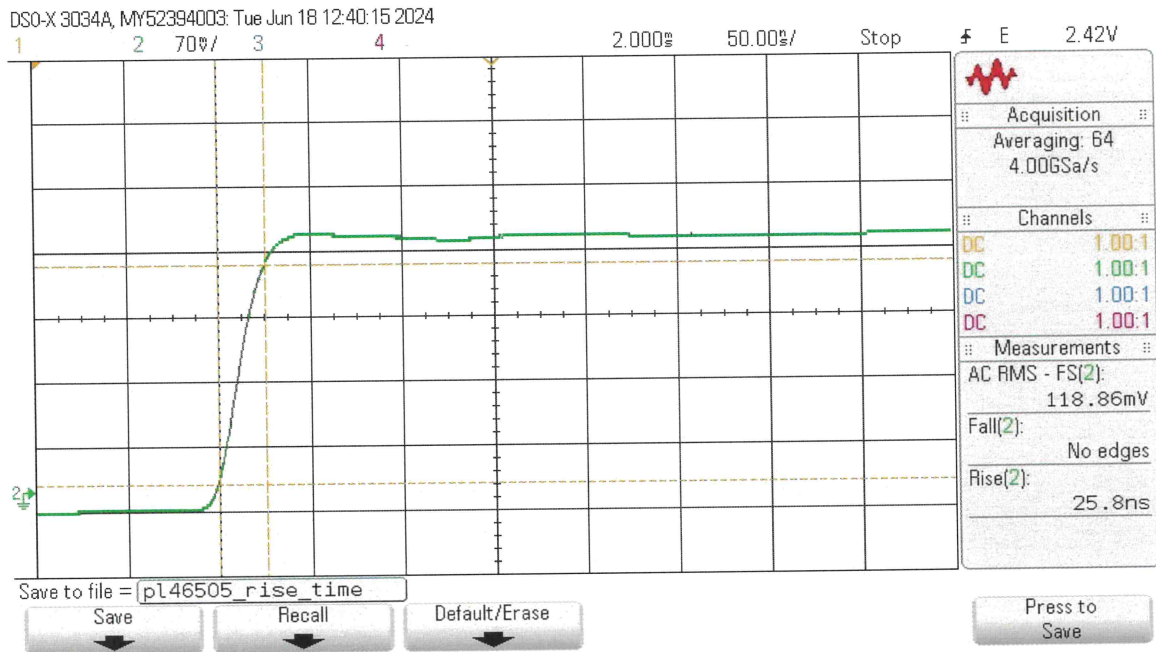

Fall and Recovery Time

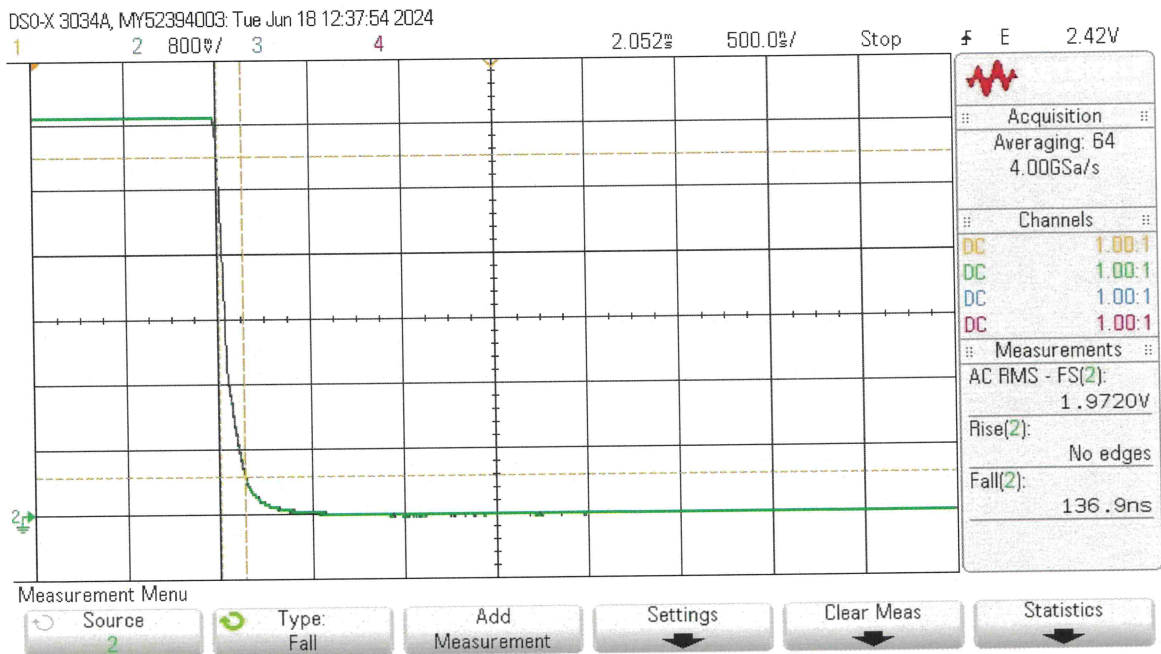



**Summary Data
For
EWDM-2G6G-65-70MV-1**

Settling Time

