



**SUMMARY TEST DATA
ON
SDLVA-0120-70-CONDOR**

Customer: _____
 SO No: _____
 Model No: SDLVA-0120-70-CONDOR
 Serial No: PL47094/2431

Tested By: D. Weinrob
 Temperature: +25°C
 Date: 07/29/2024
 Drawing No: 27608414 Rev: A1

TEST ITEM NO:	PARAMETERS	SPECIFIED VALUE	MEASURED VALUE	QA/QC
1	FREQUENCY RANGE:	750 MHz TO 1250 MHz	750 MHz TO 1250 MHz	PMI QA3
2	DYNAMIC RANGE:	70 dBm MINIMUM, 75 dBm TYPICAL	70 dBm	
3	LOG LINEARITY:	±2.5 dB MAXIMUM @ 1 GHz	-0.55 dB See Plot	
4	MINIMUM LOGGING RANGE:	-60 dBm MINIMUM, -65 dBm TYPICAL	-65 dBm See Plot	
5	MAXIMUM LOGGING RANGE:	+5 dBm MINIMUM +8 dBm TYPICAL	+5 dBm See Plot	
6	VSWR:	1.8:1 MAX (INPUT) 2.5:1 MAX (OUTPUT)	1.12:1 < 2.5:1 See Plot	
7	TANGENTIAL SENSITIVITY:	-65 dBm MINIMUM, -70 dBm TYPICAL	-67.5 dBm	
8	LIMITED IF OUTPUT:	-6 dBm NOMINAL, ±2.5 db MAXIMUM	-6.43 dBm	
9	MAXIMUM RF INPUT POWER:	+10 dBm	PASS	
10	OUTPUT COUPLING:	DC	PASS	
11	MAXIMUM OUTPUT VOLTAGE:	2.7 VOLTS	PASS	
12	RISE TIME:	25 ns MAXIMUM	13.5 ns	
13	FALL TIME:	30 ns MAXIMUM	24.5 ns	



**SUMMARY TEST DATA
ON
SDLVA-0120-70-CONDOR**

14	SETTLING TIME:	40 ns MAXIMUM	23 ns	PMI QA3
15	DC OFFSET:	0.1 V NOMINAL (ADJUSTABLE)	PASS	
16	SLOPE:	25 mV/dB NOMINAL ± 5 mV/dB	25.7 mV/dB See Plot	
17	LOG SLOPE VARIATION WITH FREQUENCY:	± 0.5 mV/dB TYPICAL (OVER 80 MHz RF BANDWIDTH)	$< \pm 0.5$ mV/dB	
18	LOG SLOPE VARIATION WITH TEMPERATURE:	± 1 mV/dB TYPICAL	$< \pm 1$ mV/dB	
19	PROPAGATION DELAY:	7 ns TYPICAL, 10 ns MAXIMUM	7 ns	
20	VIDEO LOAD:	100 $\Omega \pm 10\%$	PASS	
21	DC POWER SUPPLY :	+10V TO +16.5V @ 200mA MAX* -10V TO -16.5V @ 200mA MAX	90 mA 150 mA	

***NOTE: DO NOT SUPPLY +V WITHOUT -V SUPPLIED AS WELL AS THIS MAY DESTROY THE UNIT**

QA/QC APPROVAL: K. Intu DATED: 7.29.24



SUMMARY TEST DATA ON SDLVA-0120-70-CONDOR



LOG TRANSFER WITH FREQUENCY
 MODEL: SDLVA-0120-70-CONDOR
 TESTED BY: D. Weinrob
 TEST DATE: 07/15/2024
 SERIAL NO: PL47094
 TEST TEMP: +25C



PLANAR MONOLITHICS INDUSTRIES
 7311-F GROVE ROAD, FREDERICK, MD
 21704 USA
 TEL: 301-662-5019 FAX: 301-662-1731
 URL: WWW.PMI-RF.COM

Frequency

		-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0	5	RF Input Power (dBm)
0.75 GHz	INTERCEPT (mV)	175	277	409	553	673	808	941	1056	1197	1318	1440	1584	1701	1839	1946	Measured Value (mV)
	SLOPE (mV/dB)	12	-14	-11	5	-3	4	8	-5	8	0	-6	10	-2	8	-13	Error (mV)
		0.47	-0.55	-0.41	0.20	-0.12	0.14	0.32	-0.20	0.29	0.01	-0.24	0.37	-0.07	0.31	-0.52	LINEARITY ERROR (dB)
1 GHz	INTERCEPT (mV)	187	294	419	549	654	775	899	1007	1138	1254	1369	1504	1617	1746	1846	Measured Value (mV)
	SLOPE (mV/dB)	7	-6	0	10	-5	-3	1	-10	1	-2	-7	9	2	11	-8	Error (mV)
		0.28	-0.24	-0.02	0.42	-0.19	-0.13	0.06	-0.43	0.05	-0.10	-0.29	0.36	0.08	0.48	-0.34	LINEARITY ERROR (dB)
1.25 GHz	INTERCEPT (mV)	184	281	395	515	615	728	845	946	1068	1177	1283	1409	1517	1637	1731	Measured Value (mV)
	SLOPE (mV/dB)	11	-4	-2	6	-5	-4	1	-9	1	-2	-8	7	3	11	-6	Error (mV)
		0.47	-0.19	-0.09	0.29	-0.24	-0.18	0.06	-0.42	0.04	-0.08	-0.34	0.30	0.14	0.51	-0.28	LINEARITY ERROR (dB)
Flatness +/-dB		0.3	0.4	0.5	0.8	1.2	1.7	2	2.3	2.7	2.9	3.3	3.7	3.8	4.2	4.5	

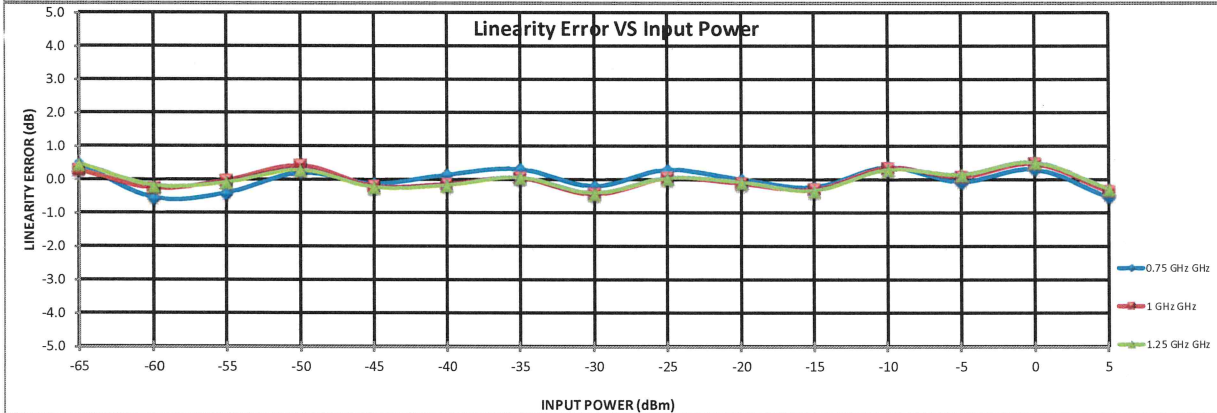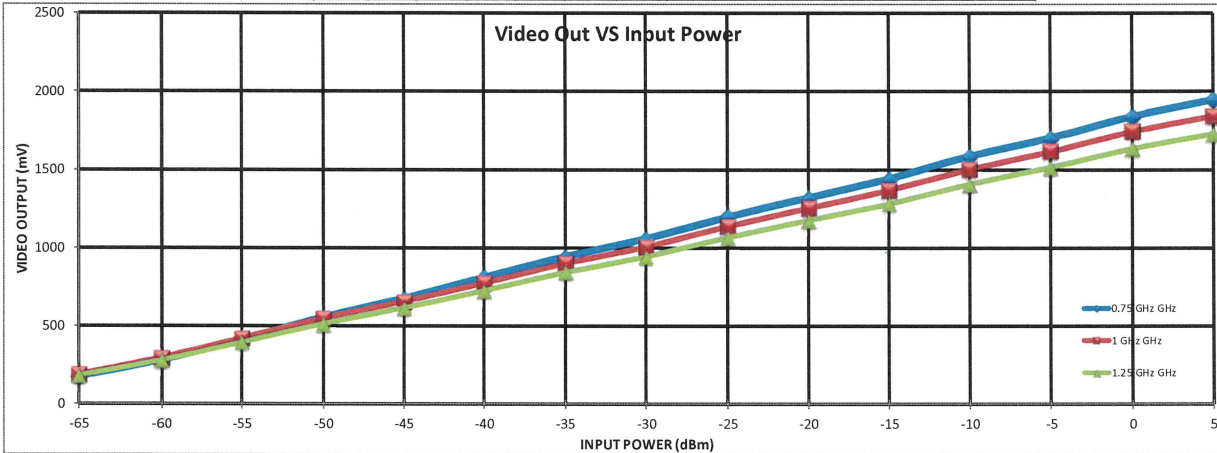



**SUMMARY TEST DATA
ON
SDLVA-0120-70-CONDOR**

