



**SUMMARY TEST DATA
ON
PEC4-16-8G18G-4R7-18-15-SFF**

PL47572/2434

Customer: _____ Tested By: FREDESWINDO C. CORTES JR
SO No: _____ Temperature: +25°C
Model No: PEC4-16-8G18G-4R7-18-15-SFF Date: 08/21/24
Serial No: PL47572/2434 Drawing No: 27628813 Rev: A1

TEST. ITEM NO	PARAMETERS	SPECIFIED VALUE	TEST RESULTS	QA QC
1	Frequency Range:	8.0 to 18.0 GHz	8.0 to 18.0 GHz	PMI QA3
2	Gain:	13 dB Min, 16 dB Max	13.56 / 15.24 dB (See Plot)	
3	Gain Flatness:	±1.50 dB Max	± .84 dB (See Plot)	
4	Noise Figure:	4.7 dB Max	2.131 dB (See Plot)	
5	OP1dB:	+18 dBm Typ	17.76 dBm (See Plot)	
6	VSWR Input:	1.67:1 Max	1.34:1 (See Plot)	
7	VSWR Output:	2.25:1 Max	1.46:1 (See Plot)	
8	Maximum Input:	+30 dBm CW	Pass	
9	DC Supply:	+12.5 to +28 VDC @ 250 mA Typ	97.6 mA	

QA/QC Approval: K. [Signature] Date: 8-22-24


4921 Robert J. Mathews Parkway, Suite 1, El Dorado Hills, CA, 95762
Phone: (916) 542-1401 Fax: (916) 265-2597
Email: sales@pmi-rf.com



**SUMMARY TEST DATA
ON
PEC4-16-8G18G-4R7-18-15-SFF**

PL47572/2434

GAIN & VSWR PLOT

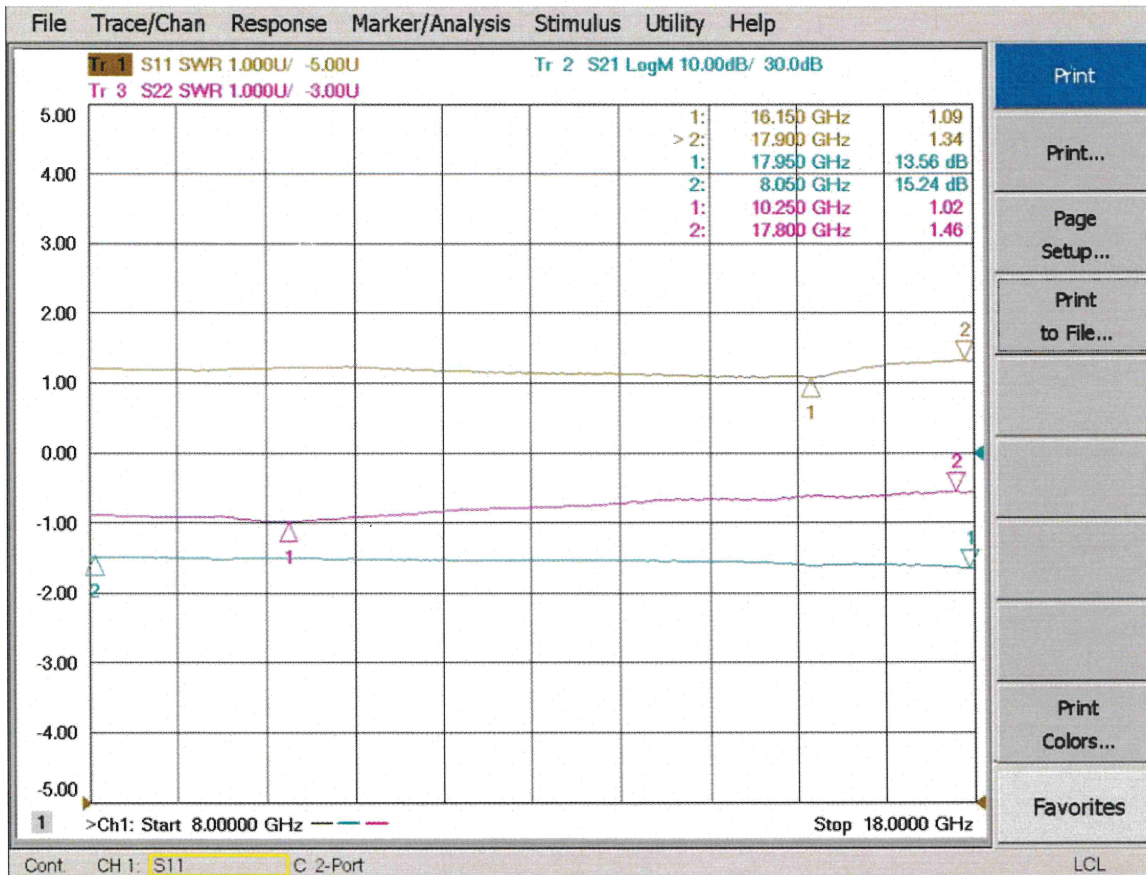


4921 Robert J. Mathews Parkway, Suite 1, El Dorado Hills, CA, 95762
Phone: (916) 542-1401 Fax: (916) 265-2597
Email: sales@pmi-rf.com



**SUMMARY TEST DATA
ON
PEC4-16-8G18G-4R7-18-15-SFF**

PL47572/2434

NOISE FIGURE PLOT

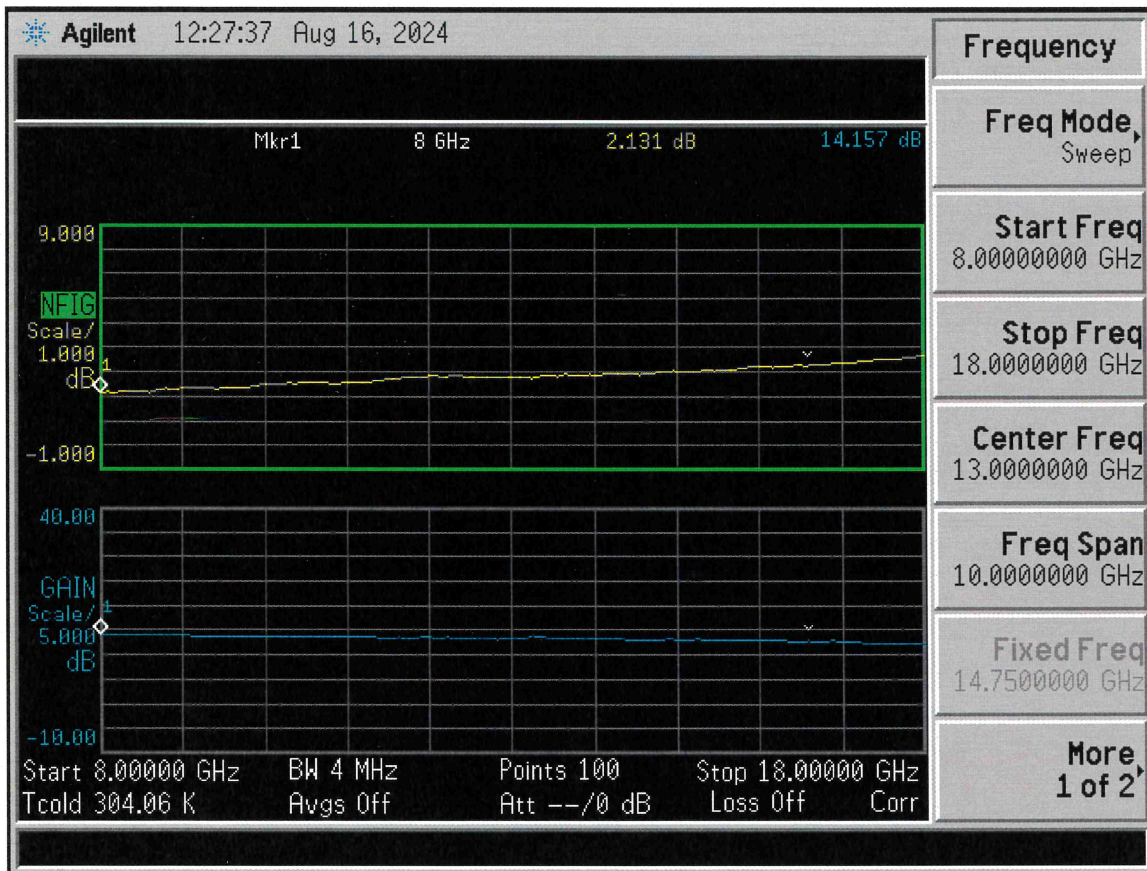




**SUMMARY TEST DATA
ON
PEC4-16-8G18G-4R7-18-15-SFF**

PL47572/2434

P1dB PLOT

MODEL: PEC4-16-8G18G-4R7-18-15-SFF
TESTED BY: Fred Cortes
DATE: 8/14/24
SERIAL NO: PL47572

Test Temp: 25C

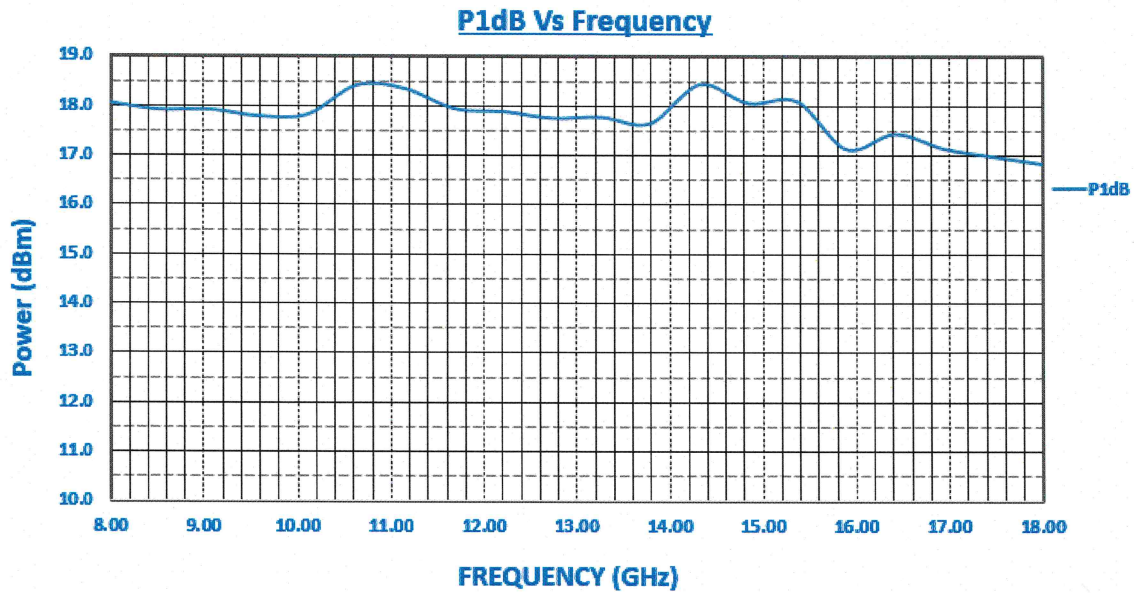

REQ 1dB COMPRESSION

Average P1dB
17.76 dBm

4921 Robert J. Mathews Parkway, Suite 1, El Dorado Hills, CA, 95762
Phone: (916) 542-1401 Fax: (916) 265-2597
Email: sales@pmi-rf.com