



**SUMMARY TEST DATA
ON
PE2-618-25-4D5-27-SFF**

Customer: _____
 SO No: _____
 Model No: PE2-618-25-4D5-27-SFF
 Serial No: PL53449/2526

Tested By: JW
 Temperature: +25° C
 Date: 6/27/2025
 Drawing No: 27643350 REV: B1

TEST ITEM NO.	PARAMETERS	SPECIFIED VALUE	Test Results	QA QC PMI QAS
1	Frequency Range:	6.0 -18.0 GHz	GHz	
2	Gain:	28 dB Max. 26 dB Min.	+27.9 dB Max. +26.5 dB Min. See Plot	}
3	Gain Flatness:	±1.0 dB Typ.	±0.66 dB See Plot	
4	Noise Figure:	4.5 dB Max.	3.3 dB See Plot	
5	OP1dB:	24 dBm Min.	26.4dBm	
6	VSWR: (IN/OUT)	2:1 Max.	1.8:1 In 1.7:1 Out See Plot	
7	DC Supply:	+12 to +15 VDC @ 300mA TYP	+12 to +15 VDC @ 370mA	
8	DC Current Draw	400 mA TYP	370mA	


QA/QC Approval: K. Hammy

Date: 6-30-25



SUMMARY TEST DATA ON PE2-618-25-4D5-27-SFF



PL53449/2526

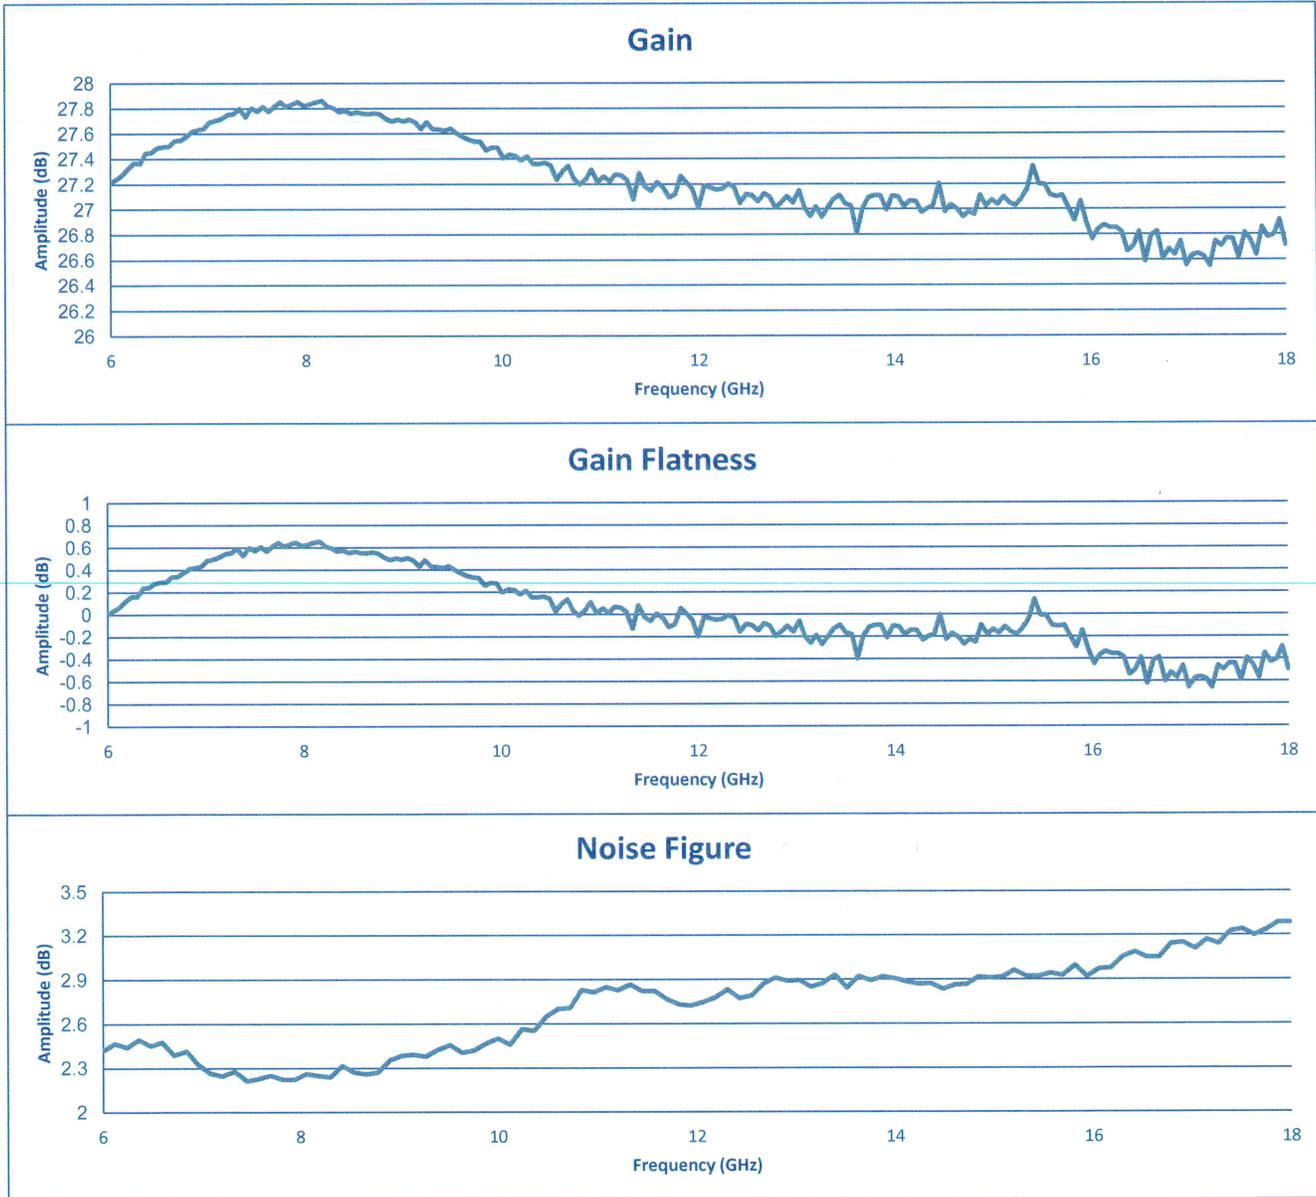



SUMMARY TEST DATA ON PE2-618-25-4D5-27-SFF

PL53449/2526

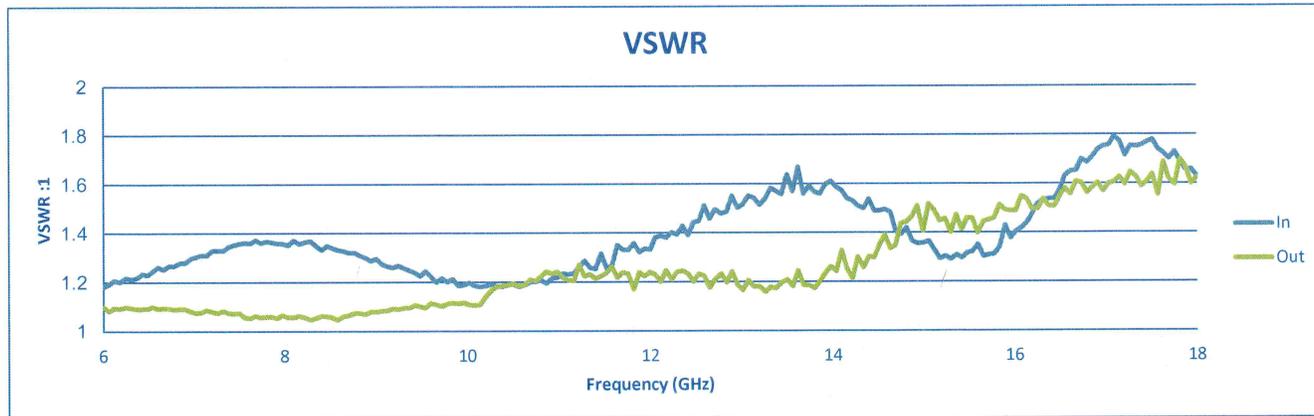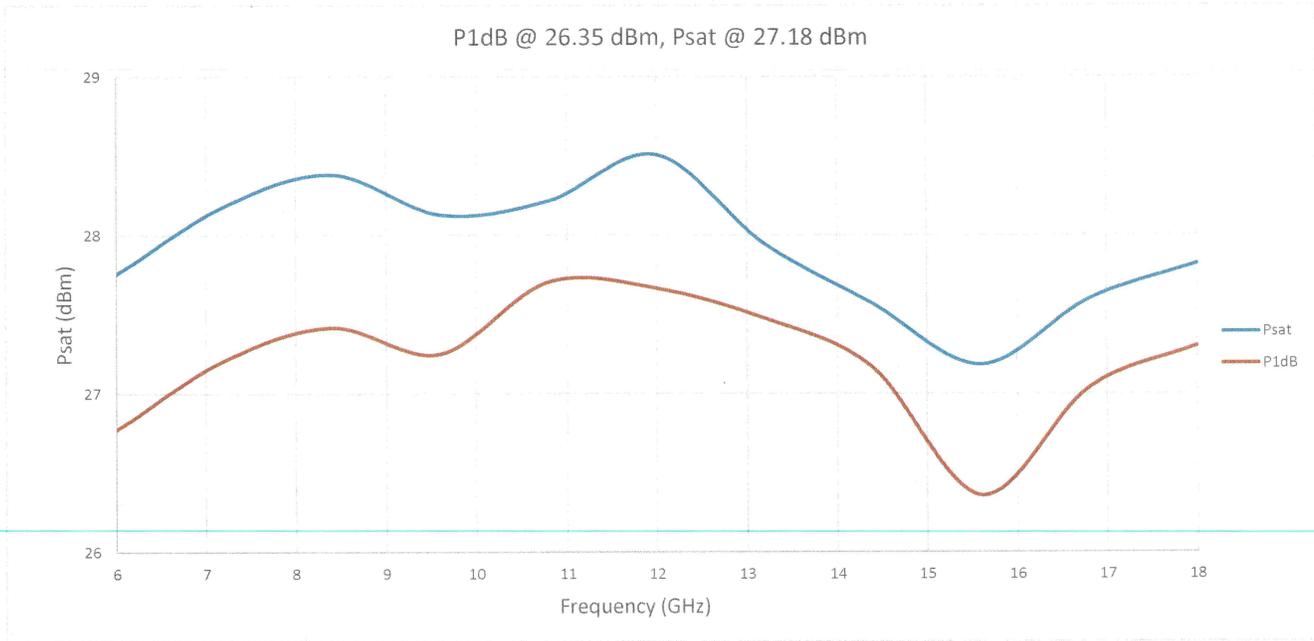

7311-F Grove Road Frederick, MD 21704 USA Phone: (301)662-5019 Fax: (301)662-1731
Email: sales@pmi-rf.com