



**TYPICAL CHARACTERISTICS
FOR
HP-26D5G-40G-292FF**



TESTED & REPORTED BY: SEBASTIAN PALACIO

January 17, 2012

PLANAR MONOLITHICS INDUSTRIES, INC.
7311-F GROVE ROAD FREDERICK, MD 21704
TEL: 301-682-5019 FAX: 301-662-1731
Email: sales@pmi-rf.com



**TYPICAL CHARACTERISTICS
FOR
HP-26D5G-40G-292FF**

TEST ITEM NO.	PARAMETERS	SPECIFIED VALUE	MEASURED VALUE	QA/QC
1	Pass band Frequency Range:	26.5 GHz – 40 GHz	Pass See plots	
2	Pass band 1dB Cutoff:	26.5 GHz	Pass See plots	
3	Passband Insertion Loss:	2 dB Max	0.52dB See plots	
4	Rejection	54dBc @ 20 GHz	55dBc See plots	
5	Pass band VSWR	2.0:1 Max	2.0:1 See plots	

PLANAR MONOLITHICS INDUSTRIES, INC.



7311-F GROVE ROAD FREDERICK, MD 21704

TEL: 301-682-5019 FAX: 301-662-1731

Email: sales@pmi-rf.com



INSERTION LOSS & VSWR

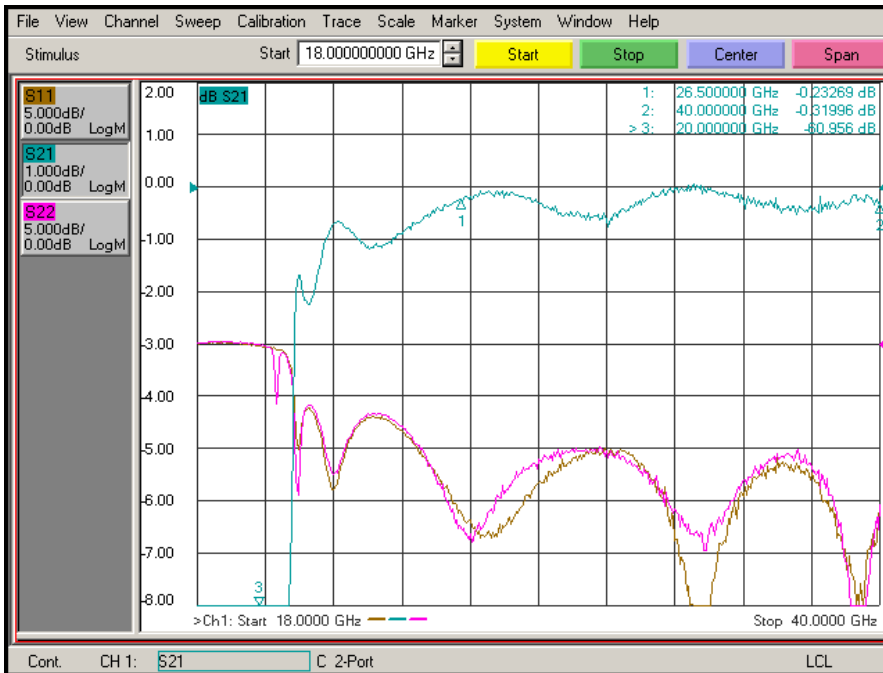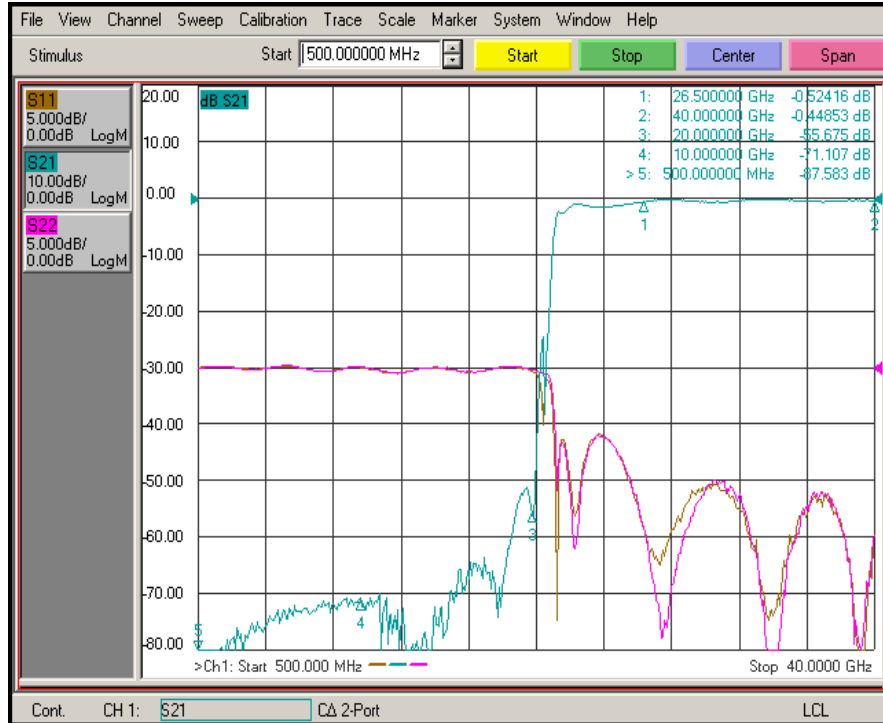

PLANAR MONOLITHICS INDUSTRIES, INC.

7311-F GROVE ROAD FREDERICK, MD 21704

TEL: 301-682-5019 FAX: 301-662-1731

Email: sales@pmi-rf.com